



Product 527741



527741 Active holder for fixed installation With tilt swivel. Apple approved charging cable. For Otterbox Defender Series Case.

Use an active holder for your iPhone on the road and you will always have a freshly charged battery! In addition, you will always have your iPhone within easy sight and reach. Safe, comfortable and convenient! The active holder is to be connected inside the dashboard. It provides an elegant installation without any cables hanging over the interior. The holder has a neat and discreet design which blends well with the vehicle's interior. Your iPhone is held securely in place in an upright position for maximum cellular reception.

When you place the iPhone in the holder, it automatically connects to the charging unit. 12 Volt. The product is E-approved. Connect the power cable with a 2 A fuse. Professional installation recommended.

The holder is made of ABS plastic and is padded. This means it has a plush coating which is extra protective for your device. The holder has a perfect fit. It is easy to put the device into the holder, and just as easy to take it with you when leaving the vehicle.

EAN: 7320285277410


Item no 527741 fits:

Apple iPhone 6 Plus (For all countries)

Apple iPhone 6S Plus (For all countries)

INSTALLATION INSTRUCTIONS

1.

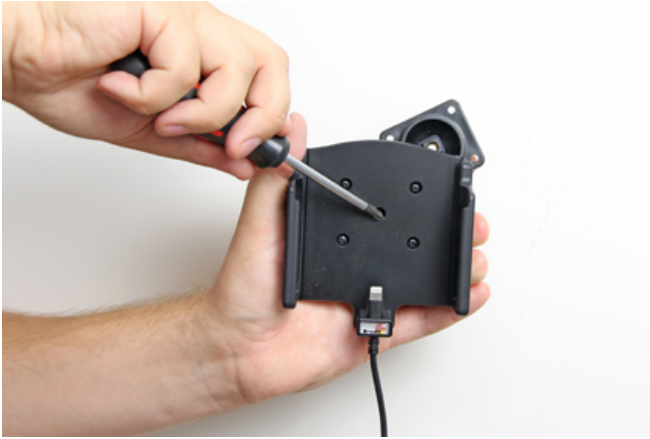

2.



3.



4.



Please read all of the instructions and look at the pictures before attaching the holder. Important Note: Connect to a 2 A fuse holder and fuse inline with the Red wire close to the power source. Route the cable from the holder into the vehicle dashboard and secure the charger unit in place. Ensure the charger unit is securely mounted behind the dashboard in a well ventilated area that does not get hot! Route the power cable from the charger unit to the power supply source in the vehicle and connect as follows: 1. Connect the White wire to a Negative Ground connection of the vehicle or the vehicle chassis. 2. Connect the Red wire to a 12 Volt power supply in the vehicle that is controlled by the ignition switch of the vehicle. How to mount the holder: 1. Loosen the screw in the center of the holder so you can remove the tilt swivel attaching plate on the back. 2. Place the attaching plate onto the desired position. Screw the attaching plate into place with the enclosed screws. 3. Place the holder over the attaching plate so the tilt swivel fits. Screw the holder onto the attaching plate. 4. The holder is in place.