

ZYXEL


## Zyxel GS1915-8EP Hallittu L2 Gigabit Ethernet (10/100/1000) Power over Ethernet -tuki musta

**Tuotemerkki :** Zyxel

**Tuotekoodi :** GS1915-8EP-EU0101F

**Tuotteen nimi :** GS1915-8EP

Zyxel GS1915-8EP. Kytkein tyyppi: Hallittu, Kytinkerros: L2. Peruskäytävä RJ-45 Ethernet-porttien tyyppi: Gigabit Ethernet (10/100/1000), Basic kytävä RJ-45 Ethernet-porttien määrä: 8. Täysin kaksipuolinen. MAC-osoitetaulukko: 8000 entries, Kytäväkapasiteetti: 16 Gbit/s. Verkkostandardit: IEEE 802.1Q, IEEE 802.1p, IEEE 802.1x, IEEE 802.3, IEEE 802.3ab, IEEE 802.3ad, IEEE 802.3af, IEEE...  
Virtaliitin: AC-in-liitin. Power over Ethernet -tuki

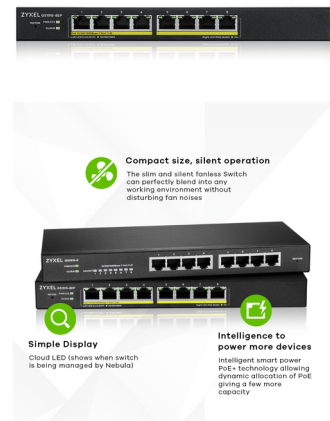

Management features		Design	
Switch type *	Managed	LED indicators	✓
Switch layer	L2	Electromagnetic compatibility	LVD EN60950-1, BSMI CNS14336-1
Quality of Service (QoS) support	✓	<b>Performance</b>	
Web-based management	✓	Mean time between failures (MTBF)	1641000 h
System event log	✓	<b>Power</b>	
MIB support	RFC 1213 MIB II, RFC 2819, RFC 1215, RFC 1493	Power source *	AC
<b>Ports &amp; interfaces</b>		AC input voltage	200 - 240 V
Basic switching RJ-45 Ethernet ports quantity *	8	AC input frequency	50 - 60 Hz
Basic switching RJ-45 Ethernet ports type *	Gigabit Ethernet (10/100/1000)	Power consumption (max)	72 W
Gigabit Ethernet (copper) ports quantity	8	<b>Power over Ethernet (PoE)</b>	
Power connector	AC-in jack	Power over Ethernet (PoE) *	✓
<b>Network</b>		Power over Ethernet (PoE) ports quantity	8
Networking standards *	IEEE 802.1Q, IEEE 802.1p, IEEE 802.1x, IEEE 802.3, IEEE 802.3ab, IEEE 802.3ad, IEEE 802.3af, IEEE 802.3at, IEEE 802.3az, IEEE 802.3u, IEEE 802.3x	Total Power over Ethernet (PoE) budget	60 W
10G support *	✗	<b>Operational conditions</b>	
Copper ethernet cabling technology	10BASE-T, 100BASE-TX, 1000BASE-T	Operating temperature (T-T)	0 - 40 °C
Full duplex	✓	Storage temperature (T-T)	-40 - 70 °C
Flow control support	✓	Operating relative humidity (H-H)	10 - 95%
Broadcast storm control	✓	Storage relative humidity (H-H)	10 - 95%
Rate limiting	✓	Heat dissipation	245.52 BTU/h
Auto MDI/MDI-X	✓	<b>Weight &amp; dimensions</b>	
VLAN support	✓	Width	250 mm
Number of VLANs	8	Depth	104 mm
<b>Data transmission</b>		Height	27 mm
Switching capacity *	16 Gbit/s	Weight	620 g
Forwarding rate	11.9 Mpps	<b>Packaging content</b>	
MAC address table *	8000 entries	Cables included	AC
Jumbo frames support	✓	Quick start guide	✓
		User guide	✓
		Manual	✓
		<b>Packaging data</b>	
		Package width	302 mm

<b>Data transmission</b>		<b>Packaging data</b>	
Jumbo frames	9000	Package depth	227 mm
Packet buffer memory	0.525 MB	Package height	64 mm
<b>Security</b>		Package weight	1.4 kg
IGMP snooping	✓	<b>Certificates</b>	
MAC address filtering	✓	Certification	CE, FCC, C-Tick, Class A, Class B, BSMI CNS13438
SSH/SSL support	✓	<b>Logistics data</b>	
<b>Multicast features</b>		Harmonized System (HS) code	85176990
Multicast support	✓		
<b>Protocols</b>			
Management protocols	SNMP v1,v2,v3, RMON (1,2,3,9)		
<b>Design</b>			
Product colour	Black		



4718937621934

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 25-NOV-2024. Prints or copies of Information are only valid on the printed Publication date