

Fujitsu PRIMERGY TX1330M4 palvelin 0 GB Tower Intel Xeon E E-2176G 3,7 GHz 16 GB DDR4-SDRAM 450 W

Tuotemerkki : Fujitsu

Tuoteperhe: PRIMERGY

Tuotekoodi:
VFY:T1334SC170IN


Tuotteen nimi : TX1330M4

Fujitsu PRIMERGY TX1330M4. Suoritinperhe: Intel Xeon E, Prosessorin taajuus: 3,7 GHz, Prosessorimalli: E-2176G. Sisäinen muisti: 16 GB, Sisäisen muistin tyyppi: DDR4-SDRAM. Kokonaistallennuskapasiteetti: 0 GB, HDD-käyttöliittymä: SATA, Serial Attached SCSI (SAS). Ethernet LAN, Kaapelitekniikka: 10/100/1000Base-T(X). Virtalähde: 450 W. Alustatyyppi: Tower



Processor		Ports & interfaces	
Processor manufacturer *	Intel	USB 3.2 Gen 2 (3.1 Gen 2) Type-C ports quantity	2
Processor family *	Intel Xeon E	VGA (D-Sub) ports quantity	1
Processor model *	E-2176G	Serial ports quantity	1
Processor frequency *	3.7 GHz	RS-232 ports	1
Processor boost frequency	4.7 GHz	Expansion slots	
Processor cores	6	PCI Express x1 slots	1
Processor cache	12 MB	PCI Express x4 slots	1
Number of processors installed	1	PCI Express x8 slots	2
Thermal Design Power (TDP)	80 W	PCI Express slots version	3.0
Processor cache type	Smart Cache	Design	
System bus rate	8 GT/s	Chassis type *	Tower
Processor socket	LGA 1151 (Socket H4)	Product colour	Black
Processor lithography	14 nm	Software	
Processor threads	12	Compatible operating systems *	Microsoft Hyper-V Server 2012 R2 Microsoft Hyper-V Server 2016 Microsoft Windows Server 2012 R2 Datacenter Microsoft Windows Server 2016 Datacenter Microsoft Windows Server 2012 R2 Standard Microsoft Windows Server 2016 Standard Microsoft Windows Server 2012 R2 Essentials Microsoft Windows Server 2016 Essentials Microsoft Windows Server 2012 R2 Foundation Microsoft Windows Storage Server 2012 R2 Standard Microsoft Windows Storage Server 2016 Standard Microsoft Hyper-V Server 2012 Microsoft Windows Server 2012 Datacenter Microsoft Windows Server 2012 Standard Microsoft Windows Server 2012 Essentials Microsoft Windows Server 2012 Foundation
Processor operating modes	64-bit		
Stepping	U0		
Bus type	DMI3		
Processor codename	Coffee Lake		
Tjunction	100 °C		
Maximum internal memory supported by processor	128 GB		
Memory types supported by processor	DDR4-SDRAM		
Memory clock speeds supported by processor	2666 MHz		
Memory bandwidth supported by processor (max)	41.6 GB/s		
Execute Disable Bit	✓		
Idle States	✓		
Thermal Monitoring Technologies	✓		
Maximum number of PCI Express lanes	16		
PCI Express configurations	1x16, 2x8, 1x8+2x4		
Processor package size	37.5 x 37.5 mm	Processor special features	
Supported instruction sets	AVX 2.0, SSE4.1, SSE4.2	CPU configuration (max)	1
Processor code	SR3WS	Enhanced Intel SpeedStep Technology	✓
Scalability	1S		

Processor		Processor special features	
Embedded options available	✓	Intel Virtualization Technology for Directed I/O (VT-d)	✓
Memory		Intel® Hyper Threading Technology (Intel® HT Technology)	✓
Internal memory *	16 GB	Intel® Turbo Boost Technology	2.0
Internal memory type *	DDR4-SDRAM	Intel® Quick Sync Video Technology	✓
Memory slots	4	Intel® InTru™ 3D Technology	✓
ECC	✓	Intel® Clear Video HD Technology (Intel® CVT HD)	✓
Maximum internal memory *	128 GB	Intel® AES New Instructions (Intel® AES-NI)	✓
Storage		Intel Trusted Execution Technology	✓
Total storage capacity *	0 GB	Intel Enhanced Halt State	✓
HDD interface	Serial ATA, Serial Attached SCSI (SAS)	Intel VT-x with Extended Page Tables (EPT)	✓
RAID support *	✓	Intel® Secure Key	✓
RAID levels	0, 1, 5, 6, 10	Intel TSX-NI	✓
Optical drive type *	✗	Intel® OS Guard	✓
Graphics		Intel Clear Video Technology	✓
On-board graphics card	✓	Intel Software Guard Extensions (Intel SGX)	✓
On-board graphics card model	Intel UHD Graphics P630	Intel® Clear Video Technology for Mobile Internet Devices (Intel CVT for MID)	✓
On-board graphics card base frequency	350 MHz	Intel 64	✓
On-board graphics card dynamic frequency (max)	1200 MHz	Intel Secure Key Technology version	1.00
Maximum on-board graphics card memory	64 GB	Intel Virtualization Technology (VT-x)	✓
On-board graphics card OpenGL version	4.5	Intel TSX-NI version	1.00
On-board graphics card DirectX version	12.0	Processor ARK ID	134860
Number of displays supported (on-board graphics)	3	Power	
On-board graphics card ID	0x3E96	Power supply *	450 W
Network		Operational conditions	
LAN controller	Intel I210	Operating temperature (T-T)	5 - 45 °C
Ethernet LAN	✓	Operating relative humidity (H-H)	10 - 85%
Cabling technology	10/100/1000Base-T(X)	Certificates	
Ethernet interface type	Gigabit Ethernet	Certification	CB, RoHS, WEEE, GS, CE, CSA us, ULc/us, FCC Class A, VCCI:V3 Class A + JIS 61000-3-2, GOST-R, KC, CCC, C-Tick, BSMI
Ports & interfaces		Weight & dimensions	
Ethernet LAN (RJ-45) ports *	2	Width	177 mm
USB 2.0 ports quantity	4	Depth	560 mm
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	4	Height	455 mm
		Other features	
		iSCSI support	✓

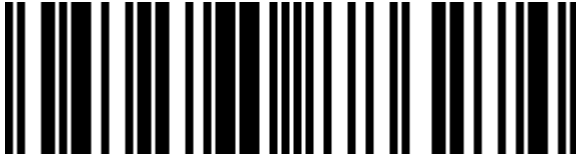

4059595886274

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 26-DEC-2024. Prints or copies of Information are only valid on the printed Publication date