

## D-Link DGS-3000-28LP verkkokytkin Hallittu L2 Gigabit Ethernet (10/100/1000) Power over Ethernet -tuki 1U musta

**Tuotemerkki :** D-Link

**Tuotekoodi:** DGS-3000-28LP




**Tuotteen nimi :** DGS-3000-28LP

D-Link DGS-3000-28LP. Kytkin tyyppi: Hallittu, Kytinkerros: L2. Peruskytkentä RJ-45 Ethernet-porttien tyyppi: Gigabit Ethernet (10/100/1000), Basic kytkentä RJ-45 Ethernet-porttien määrä: 24, Console-portti: RJ-45. Täysin kaksipuolinen. MAC-osoitetaulukko: 16000 entries, Kytkentäkapasiteetti: 56 Gbit/s. Verkkostandardit: IEEE 802.1AX, IEEE 802.1D, IEEE 802.1Q, IEEE 802.1ab, IEEE 802.1ag, IEEE 802.1p, IEEE 802.1s, IEEE.... Power over Ethernet -tuki. Telineasennus, Kotelo: 1U



Management features		Design	
Switch type *	Managed	Electromagnetic compatibility	CE, FCC, C-Tick, VCCI, BSMI
Switch layer	L2	Performance	
Quality of Service (QoS) support	✓	Virtual stacking (units)	32
Web-based management	✓	Built-in processor	✓
ARP inspection	✓	Noise level	47.4 dB
Ports & interfaces		Mean time between failures (MTBF)	304565 h
Basic switching RJ-45 Ethernet ports quantity *	24	Power	
Basic switching RJ-45 Ethernet ports type *	Gigabit Ethernet (10/100/1000)	Redundant power supply (RPS) support	✓
SFP module slots quantity	4	AC input voltage	100 - 240 V
Console port	RJ-45	AC input frequency	50 - 60 Hz
Network		Power consumption (typical)	28.4 W
Networking standards *	IEEE 802.1AX, IEEE 802.1D, IEEE 802.1Q, IEEE 802.1ab, IEEE 802.1ag, IEEE 802.1p, IEEE 802.1s, IEEE 802.1w, IEEE 802.3, IEEE 802.3ab, IEEE 802.3ad, IEEE 802.3ae, IEEE 802.3af, IEEE 802.3ah, IEEE 802.3at, IEEE 802.3u, IEEE 802.3x	Power consumption (max)	246.5 W
		Power over Ethernet (PoE)	
10G support *	✓	Power over Ethernet (PoE) *	✓
Copper ethernet cabling technology	10BASE-T, 100BASE-TX, 1000BASE-T	Power over Ethernet plus (PoE+) ports quantity	24
Cable types supported	Cat5, Cat5e	Total Power over Ethernet (PoE) budget	193 W
Port mirroring	✓	Operational conditions	
Full duplex	✓	Operating temperature (T-T)	-5 - 50 °C
Flow control support	✓	Operating relative humidity (H-H)	0 - 95%
Link aggregation	✓	Heat dissipation	840 BTU/h
Auto MDI/MDI-X	✓	Weight & dimensions	
Spanning tree protocol	✓	Width	440 mm
Head-of-line (HOL) blocking	✓	Depth	210 mm
VLAN support	✓	Height	44 mm
Virtual LAN features	Private VLAN, Voice VLAN, Tagged VLAN, Protocol-based VLAN, MAC address-based VLAN, Port-based VLAN	Weight	2.54 kg
		Packaging data	
Number of VLANs	4094	Package width	348 mm
		Package depth	511 mm
		Package height	91 mm
		Package weight	4.11 kg
		Technical details	
		Shipping (inner) case height	38.3 cm

Data transmission		Technical details	
Switching capacity *	56 Gbit/s	Shipping (inner) case width	29.6 cm
Forwarding rate	68.45 Mpps	Shipping (inner) case length	52.9 cm
MAC address table *	16000 entries	Shipping (inner) case net weight	7.8 kg
Number of static routes	64	Products per shipping (inner) case	3 pc(s)
Jumbo frames support	✓	Pallet gross weight (air)	545.3 kg
Jumbo frames	9216	Master (outer) cases per pallet (air)	40 pc(s)
Packet buffer memory	1.5 MB	Products per pallet (air)	120 pc(s)
Security		Pallet gross length	110 cm
DHCP features	DHCP server, DHCP client	Pallet gross width	120 cm
Access Control List (ACL)	✓	Pallet height (air)	2.05 m
Access Control List (ACL) rules	1024	Pallet gross weight (sea)	545.3 kg
IGMP snooping	✓	Master (outer) cases per pallet (sea)	40 pc(s)
Security algorithms	802.1x RADIUS, SNMP, SNMPv3, SSH, SSH-2, SSL/TLS	Products per pallet (sea)	120 pc(s)
BPDU filtering/protection	✓	Pallet height (sea)	2.05 m
Multicast features		Shipping (inner) case gross weight	13.2 kg
Multicast support	✓	Logistics data	
Multicast Listener Discovery (MLD) snooping	MLD v1, MLD v2	Harmonized System (HS) code	85176990
Design			
Rack mounting *	✓		
Stackable *	✓		
Form factor	1U		
Product colour	Black		
LED indicators	Activity, Fan fail, Link, Power, Speed		
Number of fans	2 fan(s)		
Safety	cUL, CB		

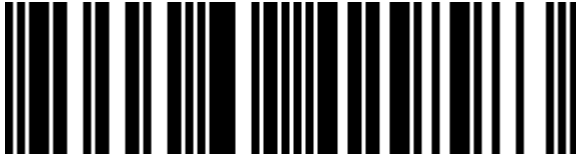

0790069429583



790069429583

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.