PHILIPS

Philips Signage Solutions D-Line Digitaalinen litteä infotaulu 127 cm (50") VA 500 cd/m² 4K Ultra HD musta
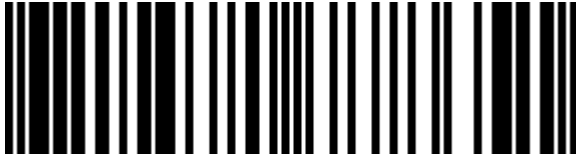

Tuotemerkki : Philips   **Tuoteperhe:** Signage Solutions   **Tuotekoodi:** 50BDL4511D/00
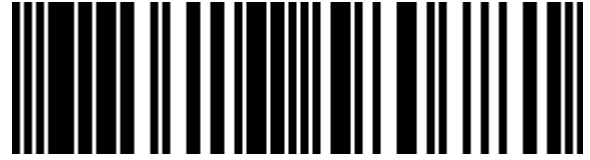
Tuotteen nimi : D-Line

Philips Signage Solutions D-Line. Tuotteen muotoilu: Digitaalinen litteä infotaulu. Näytön halkaisija: 127 cm (50"), Näytön teknologia: VA, Näytön erottelutarkkuus: 3840 x 2160 pikseliä, Näytön kirkkaus: 500 cd/m², HD-tyyppi: 4K Ultra HD. Tuotteen väri: musta

Display

Display diagonal *	127 cm (50")
Display technology *	VA
Display resolution *	3840 x 2160 pixels
Display brightness *	500 cd/m²
HD type *	4K Ultra HD
Touchscreen *	✘
Native aspect ratio	16:9
Response time	8 ms
Contrast ratio (typical)	4000:1
Contrast ratio (dynamic)	500000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	1.07 billion colours
Pixel pitch	0.2854 x 0.2854 mm
Display diagonal (metric)	125.7 cm
Native refresh rate	60 Hz
Haze rate	25%

Ports & interfaces

HDMI ports quantity *	3
HDMI version	2.0
HDMI input ports quantity	2
HDMI output ports quantity	1
DVI port *	✔
DVI-I ports quantity	1
DisplayPorts quantity *	2
DisplayPorts in	1
DisplayPorts out	1
USB port *	✔
USB ports quantity	2
USB version	2.0
Ethernet LAN *	✔
Ethernet LAN (RJ-45) ports	1
Wi-Fi *	✘
Number of speaker outputs	1
RS-232C	✔

Audio

Built-in speaker(s) *	✔
Number of built-in speakers	2
RMS rated power	20 W

Design

Product design *	Digital signage flat panel
Placement supported *	Indoor
Orientation	Horizontal/Vertical

Power

Power consumption (typical) *	91 W
Power consumption (standby) *	0.5 W
Power consumption (max)	190 W
Energy efficiency class (SDR)	G
Energy consumption (SDR) per 1000 hours	85 kWh
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz
Energy efficiency scale	A to G

Computer system

Computer system *	✘
Built-in processor *	✘
Video formats supported	H.264, H.265, MPEG
Audio formats supported	AAC, AAC HE
Image formats supported	BMP, JPEG, PNG

Weight & dimensions

Display width	1128.4 mm
Display depth	63.5 mm
Display height	649 mm
Display weight	14.8 kg

Packaging content

Remote control included	✔
Batteries included	✔
Cables included	AC, IR sensor, RS-232

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	20 - 80%
Storage temperature (T-T)	-20 - 60 °C
Storage relative humidity (H-H)	5 - 95%
Operating altitude	0 - 3000 m

Certificates

Certification	FCC, Class A CCC CB BSMI EMF VCCI PSB EnergyStar 8.0 ETL CECP EAC

Logistics data

Harmonized System (HS) code	85285210

Features

Wall mountable	✔

Technical details

Energy saving functions	Smart Power
Keyboard control	Hidden, Lockable

Design

Product colour *	Black
VESA mounting *	✔
Panel mounting interface	400 x 400 mm

Performance

Purpose *	Universal
On Screen Display (OSD)	✔
Number of OSD languages	18
On Screen Display (OSD) languages	Arabic, Simplified Chinese, Traditional Chinese, Danish, German, Dutch, English, Spanish, Finnish, French, Italian, Japanese, Norwegian, Polish, Portuguese, Russian, Swedish, Turkish
Open Pluggable Specification (OPS)	✔
Mean time between failures (MTBF)	50000 h

Technical details

Signal loop through	DisplayPort, RS232, HDMI, IR Loop through
Set depth (inch)	6.35 cm (2.5")
Set height (inch)	64.9 cm (25.6")
Set width (inch)	112.8 cm (44.4")
Sustainability compliance	✔
Warranty period	3 year(s)
Compliance certificates	CE, RoHS

Other features

Quick start guide	✔
Network controllable	RS232/RJ-45
Screen saving functions	✔
Screws included	✔
Bezel width	1.49 cm

8712581778651

0685417580781

685417580781