

**Philips 65BDL4511D/00 Signage Display Digital A-board 165.1 cm (65") 500 cd/m<sup>2</sup> 4K Ultra HD Black 24/7**



**Brand :** Philips


**Product code:** 65BDL4511D/00

**Product name :** 65BDL4511D/00

- 65"  
 - UHD (3840 x 2160)  
 - 500cd/m<sup>2</sup>  
 65" 4KUHD 3840 x 2160 ADS, 500 cd/m<sup>2</sup>, Response 8ms, 16:9, 1200:1, 1.07 Billion, USB, HDMI, RJ-45, DPort, RS232C  
 Philips 65BDL4511D/00. Product design: Digital A-board. Display diagonal: 165.1 cm (65"), Display resolution: 3840 x 2160 pixels, Display brightness: 500 cd/m<sup>2</sup>, HD type: 4K Ultra HD. Operating hours (hours/days): 24/7. Product colour: Black

| Display                    |                       | Design                                  |   |
|----------------------------|-----------------------|---|---|
| Display diagonal *         | 165.1 cm (65")        | Panel mounting interface                | 400 x 400 mm  |
| Display resolution *       | 3840 x 2160 pixels    | Bezel width (bottom)                    | 1.49 cm   |
| Display brightness *       | 500 cd/m <sup>2</sup> | Bezel width (side)                      | 1.49 cm   |
| HD type *                  | 4K Ultra HD           | Bezel width (top)                       | 1.49 cm   |
| Touchscreen *              | ✗                     | Performance                             |   |
| Native aspect ratio        | 16:9                  | Purpose *                               | Commercial  |
| Response time              | 8 ms                  | On Screen Display (OSD)                 | ✓   |
| Contrast ratio (typical)   | 1200:1                | On Screen Display (OSD) languages       | Arabic, Simplified Chinese, Traditional Chinese, Danish, Dutch, English, Finnish, French, Italian, Japanese, Norwegian, Polish, Portuguese, Russian, Swedish, Turkish |
| Contrast ratio (dynamic)   | 500000:1              |   |   |
| Viewing angle, horizontal  | 178°                  | Operating hours (hours/days)            | 24/7  |
| Viewing angle, vertical    | 178°                  | Power                                   |   |
| Display number of colours  | 1.07 billion colours  | Power consumption (typical) *           | 136 W   |
| Pixel pitch                | 0.372 x 0.372 mm      | Power consumption (standby) *           | 0.5 W   |
| Display diagonal (metric)  | 163.8 cm              | Energy efficiency class (SDR)           | G   |
| Panel life                 | 50000 h               | Energy consumption (SDR) per 1000 hours | 148 kWh   |
| Haze rate                  | 25%                   | AC input voltage                        | 100 - 240 V   |
| Ports & interfaces         |                       | AC input frequency                      | 50 - 60 Hz  |
| HDMI ports quantity *      | 3                     | Energy efficiency scale                 | A to G  |
| HDMI version               | 2.0                   | Computer system                         |   |
| DVI port *                 | ✓                     | Video formats supported                 | H.263, H.264, H.265, MPEG   |
| DVI-I ports quantity       | 1                     | Audio formats supported                 | AAC, HE-AAC   |
| DisplayPorts quantity *    | 2                     | Image formats supported                 | BMP, JPEG, PNG  |
| DisplayPorts in            | 1                     | Weight & dimensions                     |   |
| DisplayPorts out           | 1                     | Display width                           | 1462.3 mm   |
| USB port *                 | ✓                     | Display depth                           | 68.9 mm   |
| USB ports quantity         | 2                     | Display height                          | 837.3 mm  |
| USB version                | 2.0                   | Display weight                          | 27.8 kg   |
| Ethernet LAN *             | ✓                     |   |   |
| Ethernet LAN (RJ-45) ports | 1                     |   |   |
| Audio (L/R) in             | 1                     |   |   |
| Audio (L/R) out            | 1                     |   |   |
| RS-232C                    | ✓                     |   |   |

|                               |                 |                                   |                       |
|-------------------------------|-----------------|-----------------------------------|-----------------------|
| <b>Ports &amp; interfaces</b> |                 | <b>Packaging content</b>          |                       |
| Remote (IR) input             | 1               | Remote control included           | ✓                     |
| Remote (IR) output            | 1               | Batteries included                | ✓                     |
| OPS module slot               | ✓               | Cables included                   | AC, IR sensor, RS-232 |
| <b>Audio</b>                  |                 | <b>Operational conditions</b>     |                       |
| Built-in speaker(s) *         | ✓               | Operating temperature (T-T)       | 0 - 40 °C             |
| Number of built-in speakers   | 2               | Operating relative humidity (H-H) | 20 - 80%              |
| RMS rated power               | 20 W            | Storage temperature (T-T)         | -20 - 60 °C           |
| <b>Design</b>                 |                 | Storage relative humidity (H-H)   | 5 - 95%               |
| Product design *              | Digital A-board | <b>Logistics data</b>             |                       |
| Placement supported *         | Indoor          | Harmonized System (HS) code       | 85285210              |
| Product colour *              | Black           | <b>Technical details</b>          |                       |
| VESA mounting *               | ✓               | Sustainability certificates       | ENERGY STAR           |
|                               |                 | Compliance certificates           | RoHS                  |

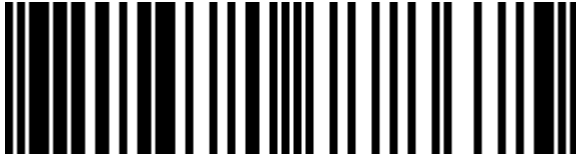

8712581778675

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 23-DEC-2024. Prints or copies of Information are only valid on the printed Publication date