



$L \pm T$ (MM)
200 ± 15
300 ± 20
500 ± 20
1000 ± 30
1500 ± 30
2000 ± 40
3000 ± 50
5000 ± 70
7500 ± 100
10000 ± 100
15000 ± 150
20000 ± 200
25000 ± 250
30000 ± 300
40000 ± 400
50000 ± 500

PIN OUT

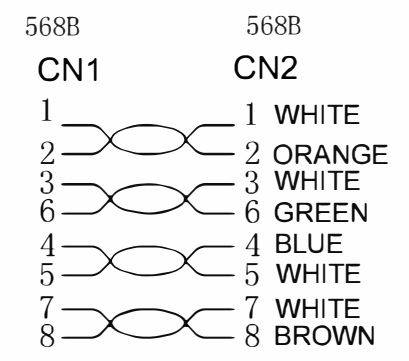

1:Electronic Tests:

- A. Open/Short/Intermittence: 100%
- B. Insulation Resistance: DC 300V 0.01S 10MΩ Min
- C. Conductive Resistance: 5Ω Max
- D. RoHS 2.0 Compliant, REACH Compliant.

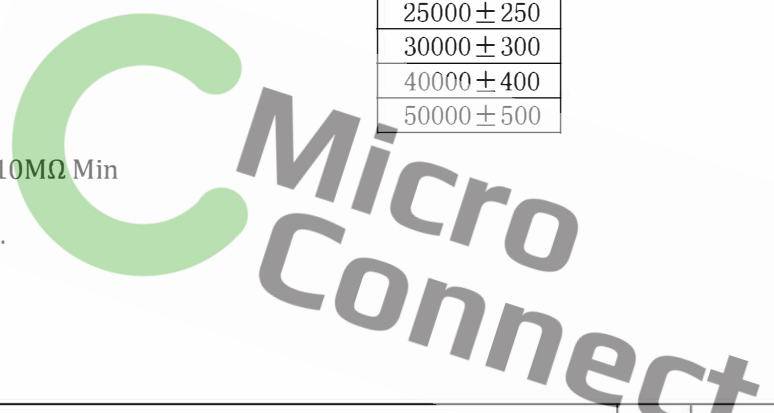

MATERIAL LIST

③	OUTER MOLD	Grey LSZH	9G	DRAW No.		NAME	CAT6A UTP Slim LSZH		
②	CONNECTOR	RJ45 PLUG: 8P8C Pin Gold Flash, Transparent plastic shell	2PCS	CUSTOMER	EET Group A/S		MAPE	TOLERANCE	
①	CABLE	[(7*28AWG/BC+HD-PE)*1P]*4P +LSZH Grey Jacke OD:3.6±0.2MM	**MM	MODEL No.				X. ±1.00 X.X ±0.50	
				APPROVE BY	CHECK BY	DRAW BY	SCALE	MM	
No.	PART NAME	CAT6A SLIM U/UTP Halogenfree, AWG28 CU, OD 3,6mm - metermarking on boot	QTY	Emil Olsen				PAGE	1/1