



APC SRTG5KXLI UPS-virtalähde Taajuuden kaksoismuunnos (verkossa) 5 kVA 5000 W 3 AC-pistorasia(a)

Tuotemerkki : APC

Tuotekoodi: SRTG5KXLI


Tuotteen nimi : SRTG5KXLI

APC SRTG5KXLI. UPS topologia: Taajuuden kaksoismuunnos (verkossa), Kokonaislähtöteho (VA): 5 kVA, Lähtöteho: 5000 W. Pistorasian tyypit: C13 liitin, C19 liitin, Ulostulojen määrä: 3 AC-pistorasia(a). Akkuteknologia: Sealed Lead Acid (VRLA), Akun jännite: 96 V, Akun kestoikä (maks.): 5 vuosi/vuusia. Kotelo: Kompakti, Tuotteen väri: musta, Telineen kapasiteetti: 4U. Tuotteen leveys: 440 mm, Tuotteen syvyys: 620 mm, Tuotteen korkeus: 178 mm



Features		Battery	
UPS topology *	Double-conversion (Online)	Battery technology	Sealed Lead Acid (VRLA)
Output power capacity *	5 kVA	Battery voltage	96 V
Output power *	5000 W	Battery life (max)	5 year(s)
Waveform *	Sine	Battery recharge time	4 h
Input operation voltage (min) *	100 V	Hot-swap battery	✓
Input operation voltage (max) *	285 V	Automatic battery test	✓
Input frequency *	40/70 Hz	Cold start	✓
Output operation voltage (min)	220 V		
Output operation voltage (max)	240 V		
Output frequency	50/60 Hz		
Surge energy rating	600 J		
Crest factor	3:1		
ECO mode	✓		
Emergency Power Off (EPO)	✓		
Output voltage Total Harmonic Distortion (THD)	2%		
Noise level	55 dB		
Audible alarm(s)	✓		
Audible alarm modes	Alarm when on battery, Low battery alarm, Overload alarm		
Ports & interfaces		Design	
AC outlet types	C13 coupler, C19 coupler	Form factor *	Compact
AC outlets quantity	3 AC outlet(s)	Rack capacity	4U
USB port	✓	Product colour *	Black
Serial interface	✓	Display type	LCD
Ethernet LAN (RJ-45) ports	1	LED indicators	✓
Emergency Power Off (EPO) connector	✓	International Protection (IP) code	IP20
		Certification	CE, EN/IEC 62040-1
		Operational conditions	
		Operating temperature (T-T)	0 - 40 °C
		Storage temperature (T-T)	-15 - 45 °C
		Operating relative humidity (H-H)	0 - 95%
		Storage relative humidity (H-H)	0 - 95%
		Operating altitude	0 - 2011 m
		Non-operating altitude	0 - 15240 m
		Weight & dimensions	
		Width	440 mm
		Depth	620 mm
		Height	178 mm
		Weight	51.9 kg


Ports & interfaces		Weight & dimensions	
SmartSlot	✓	Package width	590 mm
		Package depth	790 mm
		Package height	275 mm
		Package weight	59 kg

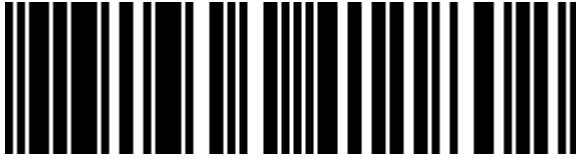

0731304411802



731304411802

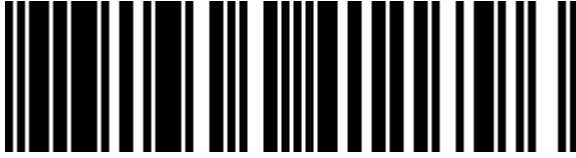

0731304411796



731304411796

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.