



LG 55VH7J-H Signage Display Panorama design 139.7 cm (55") 700 cd/m² Full HD Black 24/7

Brand : LG

Product code: 55VH7J-H


Product name : 55VH7J-H




- Brightness(Typ.) : 700 nit
 - Bezel : 1.74mm (Panel Bezel to Panel Bezel), 1.3mm (T/L), 0.44mm (B/R)
 - Depth : 86.9 mm
 - Interface : HDMI/ DP/ DVI-D/ USB/ RS232C/ RJ45/ Audio/ IR
- 55", 700 nits, 1920 x 1080 px, FHD, IPS, 100-240V, 50/60Hz, 1212.2 x 683.0 x 86.9 mm, 18.8 kg
 LG 55VH7J-H. Product design: Panorama design. Display diagonal: 139.7 cm (55"), Display resolution: 1920 x 1080 pixels, Display brightness: 700 cd/m², HD type: Full HD. Operating hours (hours/days): 24/7.
 Product colour: Black



Display		Design	
Panel type	IPS	VESA mounting *	✓
LED backlighting type	Direct-LED	Panel mounting interface	600 x 400 mm
Display diagonal *	139.7 cm (55")	Performance	
Display resolution *	1920 x 1080 pixels	Purpose *	Commercial
Display brightness *	700 cd/m ²	On Screen Display (OSD)	✓
HD type *	Full HD	Operating hours (hours/days)	24/7
Touchscreen *	✗	Power	
Native aspect ratio	16:9	Power consumption (typical) *	250 W
Response time	8 ms	Power consumption (off)	0.5 W
Contrast ratio (typical)	1000:1	Energy efficiency class (SDR)	G
Contrast ratio (dynamic)	500000:1	Energy consumption (SDR) per 1000 hours	157 kWh
Viewing angle, horizontal	178°	AC input voltage	100-240 V
Viewing angle, vertical	178°	AC input frequency	50/6 Hz
Display number of colours	1.07 billion colours	Energy efficiency scale	A to G
Rated lifetime	60000 h	Weight & dimensions	
Native refresh rate	60 Hz	Display width	1212.2 mm
Haze rate	28%	Display depth	86.9 mm
Ports & interfaces		Display height	683 mm
HDMI ports quantity *	2	Display weight	18.8 kg
HDMI version	2.2	Packaging data	
DVI port *	✓	Package width	1353 mm
DVI-D ports quantity	1	Package depth	263 mm
DisplayPorts quantity *	1	Package height	855 mm
USB port *	✓	Package weight	31 kg
USB ports quantity	1	Packaging content	
USB version	2.0	Remote control included	✓
Ethernet LAN *	✓	Cables included	DisplayPort, Power, RS-232
Ethernet LAN (RJ-45) ports	1	Operational conditions	
RS-232C	✓	Operating temperature (T-T)	0 - 40 °C
Design		Operating relative humidity (H-H)	10 - 80%
Product design *	Panorama design		
Product colour *	Black		

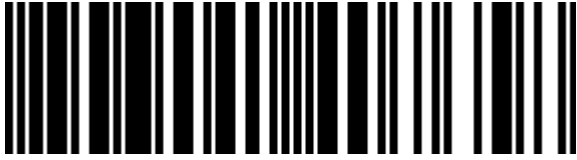

8806091407658

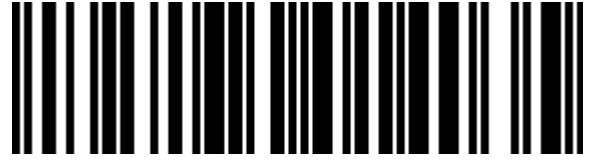

0195174014035



195174014035

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.