

## Philips Signage Solutions 49BDL2105X/00 infonäyttö 123,2 cm (48.5") IPS 500 cd/m<sup>2</sup> Full HD musta 24/7

**Tuotemerkki :** Philips

**Tuoteperhe:** Signage Solutions **Tuotekoodi:** 49BDL2105X/00

**Tuotteen nimi :**

49BDL2105X/00

Philips Signage Solutions 49BDL2105X/00. Näytön halkaisija: 123,2 cm (48.5"), Näytön teknologia: IPS, Näytön erottelutarkkuus: 1920 x 1080 pikseliä, Näytön kirkkaus: 500 cd/m<sup>2</sup>, HD-tyyppi: Full HD. Toiminta-aika (tunteja/päiviä): 24/7. Tuotteen väri: musta


|                               |                       |                                   |  |
|-------------------------------|-----------------------|-----------------------------------|--|
| <b>Display</b>                |                       | <b>Audio</b>                      |  |
| LED backlighting type         | Direct-LED            | Built-in speaker(s) *             | ✓  |
| Display diagonal *            | 123.2 cm (48.5")      | Number of built-in speakers       | 2  |
| Display technology *          | IPS                   | RMS rated power                   | 20 W   |
| Display resolution *          | 1920 x 1080 pixels    | <b>Design</b>                     |  |
| Display brightness *          | 500 cd/m <sup>2</sup> | Placement supported *             | Indoor   |
| HD type *                     | Full HD               | Orientation                       | Horizontal/Vertical  |
| Native aspect ratio           | 16:9                  | Product colour *                  | Black  |
| Response time                 | 8 ms                  | VESA mounting *                   | ✓  |
| Contrast ratio (typical)      | 1100:1                | Panel mounting interface          | 400 x 400 mm   |
| Contrast ratio (dynamic)      | 500000:1              | Mounting type                     | Wall   |
| Viewing angle, horizontal     | 178°                  | <b>Performance</b>                |  |
| Viewing angle, vertical       | 178°                  | On Screen Display (OSD) languages | Arabic, Simplified Chinese, Traditional Chinese, German, English, Spanish, French, Italian, Japanese, Polish, Russian, Turkish |
| Display number of colours     | 1.07 billion colours  | Operating hours (hours/days)      | 24/7   |
| Pixel pitch                   | 0.55926 x 0.55926 mm  | Mean time between failures (MTBF) | 50000 h  |
| Display diagonal (metric)     | 123 cm                | <b>Power</b>                      |  |
| Transparency                  | 3%                    | Power consumption (typical) *     | 100 W  |
| <b>Ports &amp; interfaces</b> |                       | Power consumption (standby) *     | 0.5 W  |
| HDMI ports quantity *         | 2                     | <b>Weight &amp; dimensions</b>    |  |
| HDMI version                  | 2.0                   | Display width                     | 1077.6 mm  |
| HDMI input ports quantity     | 2                     | Display depth                     | 93.1 mm  |
| DVI port *                    | ✓                     | Display height                    | 607.8 mm   |
| DVI-D ports quantity          | 1                     | Display weight                    | 21.7 kg  |
| VGA (D-Sub) input ports       | 1                     | <b>Packaging content</b>          |  |
| DisplayPorts quantity *       | 2                     | Remote control included           | ✓  |
| DisplayPorts in               | 1                     | Batteries included                | ✓  |
| DisplayPorts out              | 1                     | Cables included                   | DisplayPort, AC, IR sensor, LAN (RJ-45)  |
| USB port *                    | ✓                     | <b>Operational conditions</b>     |  |
| USB ports quantity            | 1                     | Operating temperature (T-T)       | 0 - 40 °C  |
| USB version                   | 2.0                   | Operating relative humidity (H-H) | 20 - 80%   |
| USB connector type            | USB Type-A            | Storage temperature (T-T)         | -20 - 60 °C  |
| Ethernet LAN *                | ✓                     | Storage relative humidity (H-H)   | 5 - 95%  |
| Ethernet LAN (RJ-45) ports    | 2                     | <b>Certificates</b>               |  |
| Audio (L/R) in                | 1                     | Certification                     | CE FCC Class A Restriction of Hazardous Substances (ROHS) CB ETL BSMI  |
| Audio (L/R) out               | 1                     |                                   |  |
| Remote (IR) input             | 1                     |                                   |  |
| Remote (IR) output            | 1                     |                                   |  |
| OPS module slot               | ✓                     |                                   |  |



0685417589180



685417589180

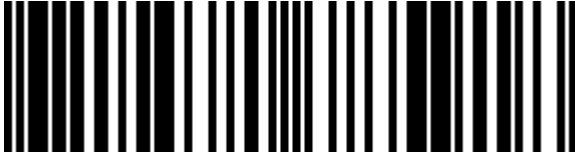

8712581785918

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.