PHILIPS

Philips Signage Solutions X-Line Videowa Digitaalinen litteä infotaulu 139,7 cm (55") LED 500 cd/m² Full HD musta

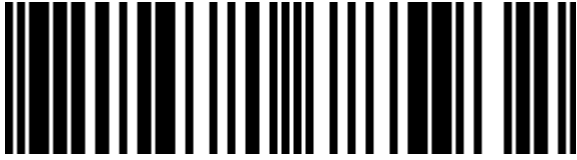**Tuotemerkki :** Philips   **Tuoteperhe:** Signage Solutions   **Tuotekoodi:** 55BDL2105X/00

Tuotteen nimi : X-Line
Videowa

Philips Signage Solutions X-Line Videowa. Tuotteen muotoilu: Digitaalinen litteä infotaulu. Näytön halkaisija: 139,7 cm (55"), Näytön teknologia: LED, Näytön erottelutarkkuus: 1920 x 1080 pikseliä, Näytön kirkkaus: 500 cd/m², HD-tyyppi: Full HD. Tuotteen väri: musta

Display

LED backlighting type	Direct-LED
Display diagonal *	139.7 cm (55")
Display technology *	LED
Display resolution *	1920 x 1080 pixels
Display brightness *	500 cd/m²
HD type *	Full HD
Touchscreen *	✗
Native aspect ratio	16:9
Response time	8 ms
Contrast ratio (typical)	1200:1
Contrast ratio (dynamic)	500000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	16.7 million colours
Pixel pitch	0.63 x 0.63 mm
Display diagonal (metric)	138.7 cm
Native refresh rate	60 Hz
Haze rate	25%

Ports & interfaces

HDMI ports quantity *	2
HDMI version	2.0
HDMI input ports quantity	2
DVI port *	✔
DVI-D ports quantity	1
VGA (D-Sub) input ports	1
DisplayPorts quantity *	2
DisplayPorts in	1
DisplayPorts out	1
DisplayPort version	1.2
USB port *	✔
USB ports quantity	1
USB version	2.0
Ethernet LAN *	✔
Ethernet LAN (RJ-45) ports	2
Wi-Fi *	✗
Number of speaker outputs	1

Audio

Built-in speaker(s) *	✔
Number of built-in speakers	2
RMS rated power	20 W

Design

Product design *	Digital signage flat panel

Performance

On Screen Display (OSD)	✔
Number of OSD languages	12
On Screen Display (OSD) languages	Arabic, Simplified Chinese, Traditional Chinese, German, English, Spanish, French, Italian, Japanese, Polish, Russian, Turkish
Open Pluggable Specification (OPS)	✔
Mean time between failures (MTBF)	50000 h

Power

Power consumption (typical) *	180 W
Power consumption (standby) *	0.5 W
Power consumption (max)	340 W

Computer system

Computer system *	✗
Built-in processor *	✗

Weight & dimensions

Width	1213.5 mm
Depth	97.8 mm
Height	684.3 mm
Weight	28.8 kg

Packaging content

Remote control included	✔
Batteries included	✔
Cables included	AC, DisplayPort, IR sensor, LAN (RJ-45)

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	20 - 80%
Storage temperature (T-T)	-20 - 60 °C
Storage relative humidity (H-H)	5 - 95%
Operating altitude	0 - 3000 m

Certificates

Certification	FCC, Class A CB ETL BSMI

Features

Wall mountable	✔

Technical details

Energy saving functions	Smart Power
Signal loop through	DisplayPort, RJ45
Set depth (inch)	9.78 cm (3.85")
Set height (inch)	68.4 cm (26.9")

Design

Placement supported *	Indoor
Orientation	Horizontal/Vertical
Product colour *	Black
VESA mounting *	✔
Panel mounting interface	100 x 100,400 x 400 mm

Performance

Purpose *	Universal

Technical details

Set width (inch)	121.3 cm (47.8")
Tiled Matrix	Up to 15 x 15
Sustainability compliance	✔
Warranty period	3 year(s)
Compliance certificates	CE, RoHS

Other features

Quick start guide	✔
Network controllable	RJ-45
Screen saving functions	✔

8712581785932

0685417589289

685417589289