



PCIe M.2 SSDs
PCIe SSD 250H

Exhibiting more than just ultra speeds, the MTE250H PCIe SSD delivers unbridled performance, low latency, and high stability for passionate gamers. Built with a PCI Express® Gen 4 x4 interface, 3D NAND flash, an 8-channel controller, a DRAM cache, and an aluminum heatsink, the MTE250H PCIe SSD is ready to put excellence in your hand.




Full speed ahead

Transcend's MTE250H PCIe SSD follows the latest NVMe 1.4 standard, supporting the PCIe™ Gen4 x4 interface, allowing four lanes to transmit and receive data simultaneously. Its 8-channel controller delivers sequential R/W up to 7,200/6,500 MB/s, and up to 530K IOPS, providing captivating performance and response times for your PC systems and game consoles.



Level up with next-gen PCIe 4.0

Transcend's MTE250H features the new PCIe 4.0 specification, supporting a bandwidth of 16 GT/s per lane as opposed to 8 GT/s per lane for PCIe 3.0. Backwards compatible with PCIe 3.0, PCIe 4.0 unleashes higher transfer speeds and guarantees lower system latency. For advanced gamers, this means a more seamless and immersive experience.

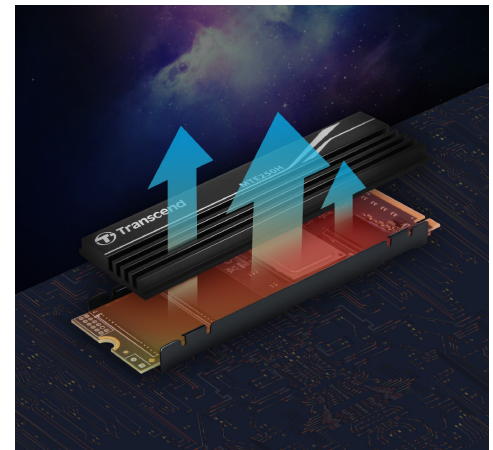

Be the coolest

Transcend's MTE250H features a high efficiency aluminum heatsink to improve heat dissipation of the high performance, compact-sized SSD. The high thermal conductivity of aluminum and increased surface area reduce drive temperatures by 15%, allowing the SSD to maintain lower operating temperatures, even when you're maxing out performance on your desktop PC or game console.

Note: Performance is based on CrystalDiskMark v6.0.2.



PCIe M.2 SSDs PCIe SSD 250H

Features

- Space-saving M.2 Type 2280 form factor
- PCIe Gen4 x4 interface and meets NVMe 1.4 standard
- 8-channel controller for ultra high data throughput
- 3D NAND flash



SSD Scope

SSD Scope features useful functions to maintain your SSD in a healthy status and also copy data from your original HDD to Transcend's new SSD.

Specifications

Appearance

Dimensions	Double-sided: 80.0 mm x 23.1 mm x 9.2 mm (3.15" x 0.9" x 0.36")
Weight	34 g (1.19 oz)
Type	M.2 2280

Interface

Bus Interface	NVMe PCIe Gen4 x4
---------------	-------------------

Storage

Flash Type	3D NAND flash
Capacity	1 TB / 2 TB

Operating Environment

Operating Temperature	0°C (32°F) ~ 70°C (158°F)
Operating Voltage	3.3V±5%

Performance

Sequential Read/Write (CrystalDiskMark)	Read: up to 7,200 MB/s Write: up to 6,500 MB/s
4K Random Read/Write (IOmeter)	Read: up to 530,000 IOPS Write: up to 420,000 IOPS
Mean Time Between Failures (MTBF)	3,000,000 hour(s)
Drive Writes Per Day (DWPD)	0.81 (5 yrs)
Terabytes Written (TBW)	up to 2960 TBW

Warranty

Certificate	CE / FCC / BSMI / KC / RCM / UKCA
Warranty	Five-year Limited Warranty

Ordering Information

1TB	TS1TMTE250H
2TB	TS2TMTE250H

Product specifications are subject to change without notice. Pictures shown may differ from actual products. Total accessible capacity varies depending on operating environment.