

ASUS TUF Gaming 750W Gold power supply unit 20+4 pin ATX ATX Black

Brand : ASUS

Product code: 90YE00S3-B0NA00

Product name : TUF Gaming 750W Gold

- Capacitors and chokes pass demanding tests to achieve Military-grade Certification
- Dual ball fan bearings can last up to twice as long as sleeve bearing designs
- A protective PCB coating protects against moisture, dust, and extreme temperatures
- An 80 Plus Gold Certification is the result of Japanese capacitors and other premium components
- Axial-tech fan design features a smaller fan hub that facilitates longer blades and a barrier ring that increases downward air pressure
- Fully modular etched cables keep your rig neat and tidy

The TUF Gaming 750W Gold is an efficient, resilient and dependable PSU that's engineered for the long haul.



Power		Ports & interfaces	
Total power *	750 W	ATX power connector (20+4 pin)	✓
AC input voltage *	100 - 240 V	Cabling type	Fully-Modular
Combined power (+3.3V)	130 W	Performance	
Combined power (+12V)	744 W	80 PLUS certification *	80 PLUS Gold
Combined power (+5V)	130 W	Purpose *	PC
Combined power (-12V)	9.6 W	Power supply unit (PSU) form factor *	ATX
Combined power (+5Vsb)	15 W	ATX version	3.0
Max output current (+3.3V)	25 A	Design	
Max output current (+12V)	62 A	Product colour	Black
Max output current (+5V)	25 A	Cooling type	Active
Max output current (-12V)	0.8 A	Fan diameter	13.5 cm
Max output current (+5Vsb)	3 A	Number of fans	1 fan(s)
Efficiency	92%	On/off switch	✓
Power protection features	Over power, Over voltage, Overcharge, Overheating, Short circuit, Under voltage	Packaging content	
Ports & interfaces		Cables included	AC, CPU, PCIe, Peripheral (Molex), SATA
Motherboard power connector *	20+4 pin ATX	Cable tie(s) included	✓
Motherboard power cable length	61 cm	Weight & dimensions	
Number of SATA power connectors	5	Width	150 mm
SATA power cable length	120,400 mm	Depth	150 mm
Peripheral (Molex) power connectors (4-pin) *	4	Height	86 mm
Peripheral (Molex) power cable length	150,400 mm	Weight	2.38 kg
PCI Express power connectors (8-pin)	3	Packaging data	
PCI Express power connectors (16-pin)	1	Package width	310 mm
CPU power connector (4+4 pin)	✓	Package depth	200 mm
		Package height	108 mm


Ports & interfaces


CPU power cable length 65 cm

Packaging data

Package weight 3.07 kg
Package type Box

Technical details

Sustainability compliance 
Compliance certificates RoHS

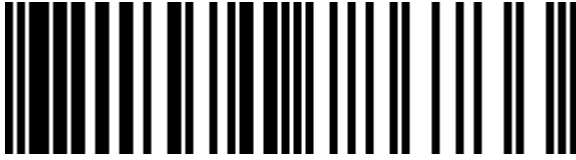

4711081786733

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 22-DEC-2024. Prints or copies of Information are only valid on the printed Publication date