



CORSAIR

iCUE

H100i | H150i | H170i

ELITE LCD XT

EXTREME PERFORMANCE LCD LIQUID CPU COOLER

EN ENGLISH

IT ITALIANO

SC 简体中文

FR FRANÇAIS

ES ESPAÑOL

AR العربية

DE DEUTSCH

PT PORTUGUÊS

NL NEDERLANDS

PL POLSKI



Note: Most newer PC cases include a CPU cut-out to allow access to the bottom of the motherboard. If your case does not include a cut-out, you will need to remove your motherboard from the case prior to installation. ELITE LCD XT coolers come with the Intel mounting bracket pre-installed on the pump for quick installation.

TABLE OF CONTENTS


INTEL (All Sockets)

AMD AM5/AM4

AMD sTRX4

INSTALLATION

















FAQ

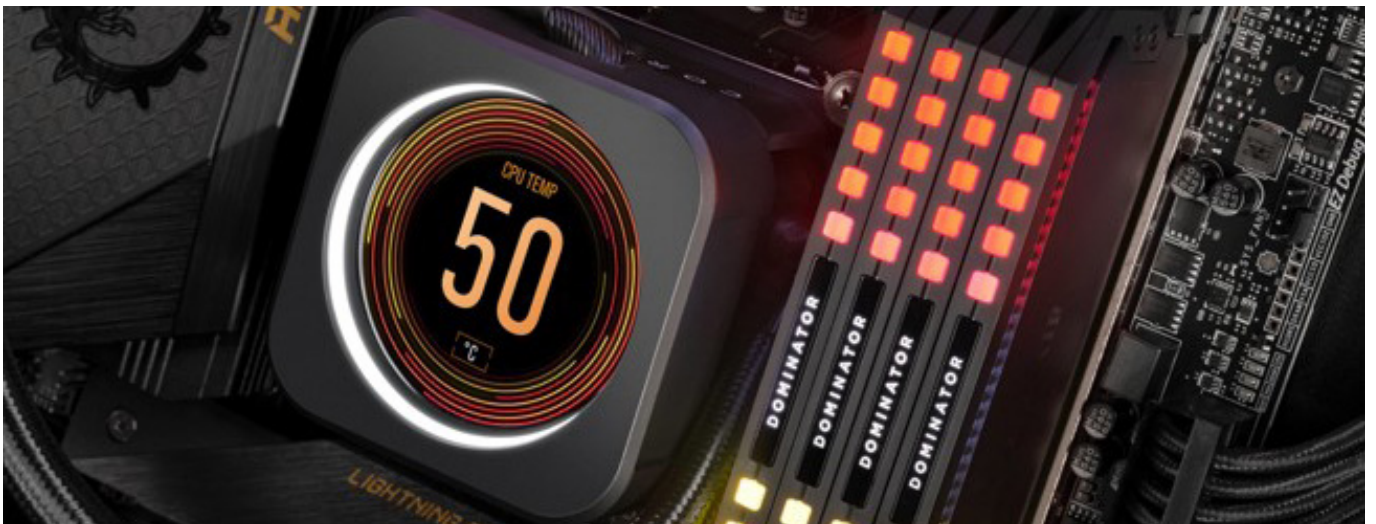


Please ensure you power down your entire PC before installation. The LCD module, the pump, and the Commander CORE are sensitive to hotplugging and ESD.

INCLUDED HARDWARE

Highlighted parts for Intel installation only

<p>A</p>  <p>x4 INTEL 1200/1150/1151/1156/1155 STANDOFFS</p>	<p>B</p>  <p>x4 INTEL 2011/2011-3/2066 STANDOFFS</p>	<p>C</p>  <p>x4 INTEL 1700 STANDOFFS</p>
<p>D</p>  <p>x1 INTEL BACKPLATE</p>	<p>E</p>  <p>x1 INTEL MOUNTING BRACKET (PRE-INSTALLED)</p>	<p>F</p>  <p>x4 THUMBSCREWS</p>
<p>G</p>  <p>x4 AMD AM5/AM4 STANDOFFS</p>	<p>H</p>  <p>x1 AMD AM5/AM4 MOUNTING BRACKET</p>	<p>I</p>  <p>x1 AMD sTR4/sTRX4 MOUNTING BRACKET</p>
<p>J</p>  <p>x4 AMD sTR4/sTRX4 STANDOFFS</p>	<p>K</p>  <p>x16 LONG FAN SCREWS (H100i) x24 LONG FAN SCREWS (H150i/H170i)</p>	<p>L</p>  <p>x8 RADIATOR SCREWS (H100i) x12 RADIATOR SCREWS (H150i/H170i)</p>
<p>M</p>  <p>x8 WASHERS (H100i) x12 WASHERS (H150i/H170i)</p>	<p>N</p>  <p>x2 AF RGB ELITE FANS (H100i) x3 AF RGB ELITE FANS (H150i/H170i)</p>	<p>O</p>  <p>COMMANDER CORE</p>
<p>P</p>  <p>USB Y-SPLITTER</p>		


1. INSTALLING THE INTEL BACKPLATE

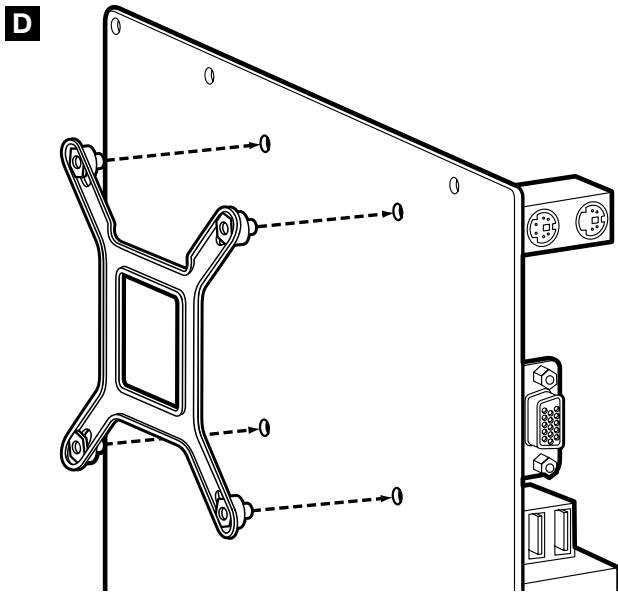


Adjust backplate for your required socket.

Note: Intel LGA 2011/2011-3/2066 do not require backplate installation. Proceed to step 2.


2. INSTALLING THE INTEL STANDOFF SCREWS

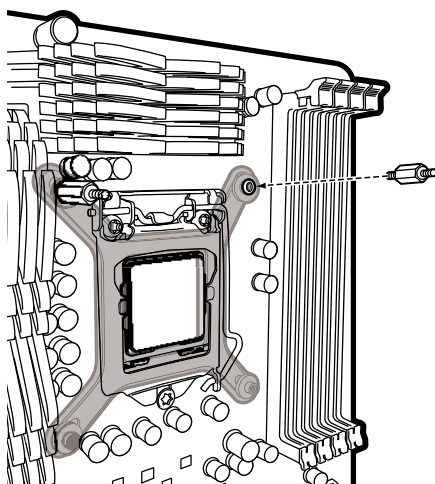


A LGA 1200/1150/
1151/1155/1156



B LGA 2011/
2011-3/2066




C LGA 1700




- > Attach the provided Intel standoff for your socket.
- > Use (A) for LGA 1200/115X, (B) for LGA 2011/2011-3/2066 or (C) for LGA 1700.
- > Tighten all four screws until firmly secured.

3. INSTALL THE FANS AND RADIATOR

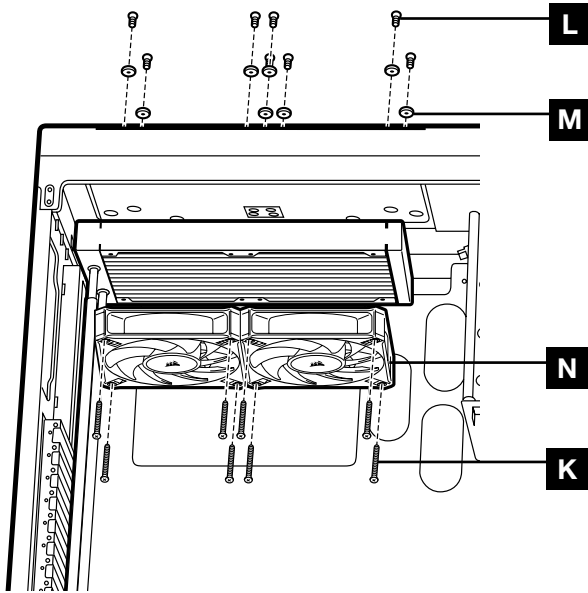

Attach the radiator and the fans as shown. For the best cooling performance, we recommend mounting the fans as an air-intake to your PC case.

4. INSTALLING THE PUMP UNIT

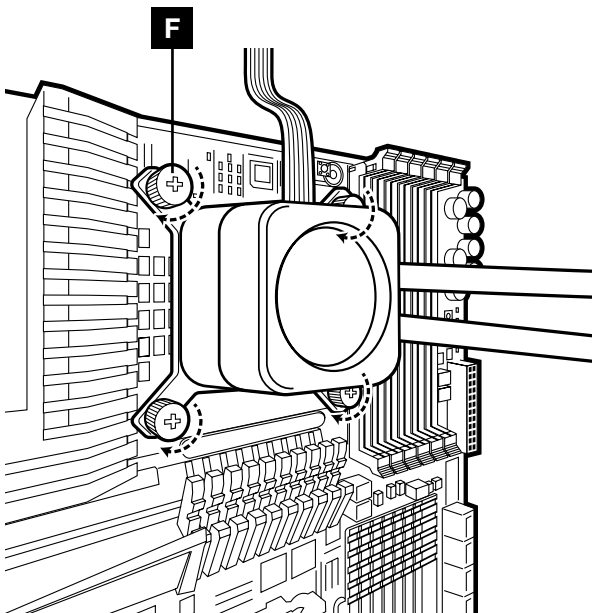

















- > Align the bracket and pump over the standoff screws as shown.
- > Attach the thumbscrews (F) to the standoff screws as shown.
- > Tighten the thumbscrews until all four corners are firmly secured.

Please continue to Page 10 to continue your installation.

INCLUDED HARDWARE

Highlighted parts for AMD AM5/AM4 installation only

<p>A</p>  <p>x4 INTEL 1200/1150/1151/1156/1155 STANDOFFS</p>	<p>B</p>  <p>x4 INTEL 2011/2011-3/2066 STANDOFFS</p>	<p>C</p>  <p>x4 INTEL 1700 STANDOFFS</p>
<p>D</p>  <p>x1 INTEL BACKPLATE</p>	<p>E</p>  <p>x1 INTEL MOUNTING BRACKET (PRE-INSTALLED)</p>	<p>F</p>  <p>x4 THUMBSCREWS</p>
<p>G</p>  <p>x4 AMD AM5/AM4 STANDOFFS</p>	<p>H</p>  <p>x1 AMD AM5/AM4 MOUNTING BRACKET</p>	<p>I</p>  <p>x1 AMD sTR4/sTRX4 MOUNTING BRACKET</p>
<p>J</p>  <p>x4 AMD sTR4/sTRX4 STANDOFFS</p>	<p>K</p>  <p>x16 LONG FAN SCREWS (H100i) x24 LONG FAN SCREWS (H150i/H170i)</p>	<p>L</p>  <p>x8 RADIATOR SCREWS (H100i) x12 RADIATOR SCREWS (H150i/H170i)</p>
<p>M</p>  <p>x8 WASHERS (H100i) x12 WASHERS (H150i/H170i)</p>	<p>N</p>  <p>x2 AF RGB ELITE FANS (H100i) x3 AF RGB ELITE FANS (H150i/H170i)</p>	<p>O</p>  <p>COMMANDER CORE</p>
<p>P</p>  <p>USB Y-SPLITTER</p>		

1. INSTALLING THE AMD AM5/AM4 MOUNTING BRACKET

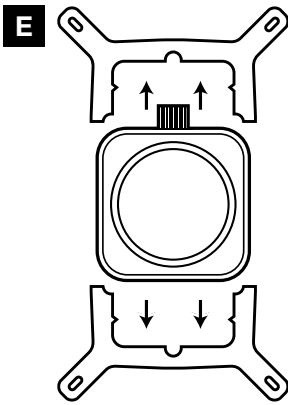


Figure 1


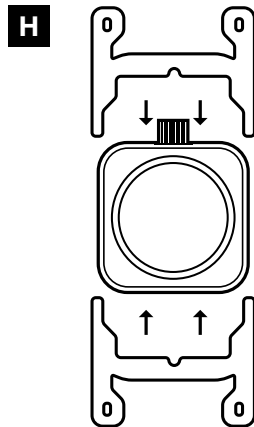


Figure 2

- > Remove the integrated Intel mounting bracket (Figure 1).
- > Install the AMD AM5/AM4 bracket by pushing both sides into the slot on the pump until secure (Figure 2).


Note: It is important that the AMD AM5/AM4 retention bracket be evenly secured on all sides before installation.

2. INSTALL THE FANS AND RADIATOR

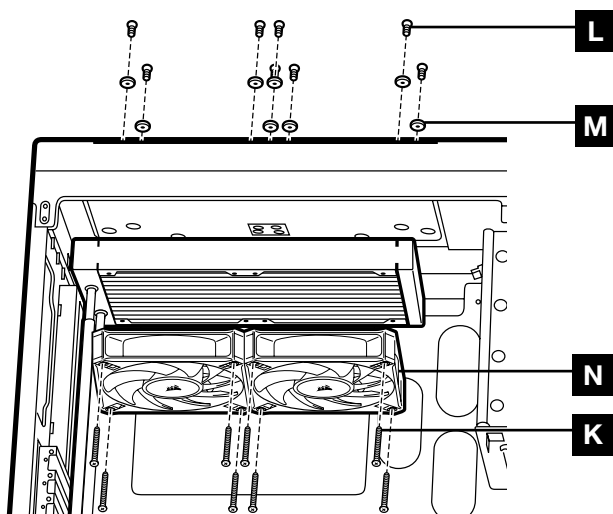


Attach the radiator and the fans as shown. For the best cooling performance, we recommend mounting the fans as an air-intake to your PC case.

3. PREPARE THE MOTHERBOARD FOR INSTALLATION

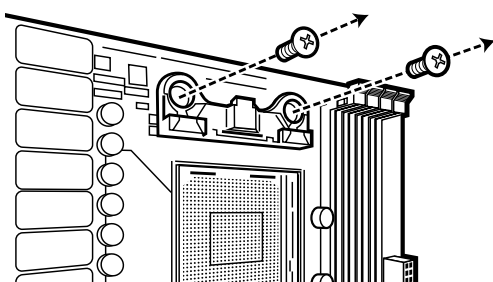


Remove the existing AMD AM5/AM4 mounting brackets shown.

4. INSTALLING THE AMD AM5/AM4 STANDOFF SCREWS

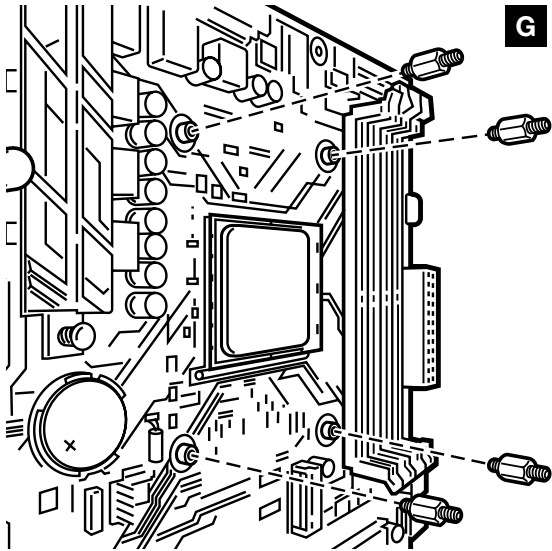

- > Attach the provided AMD AM5/AM4 standoffs to the CPU socket.
- > Tighten all four screws until firmly secure.

5. INSTALLING THE PUMP UNIT

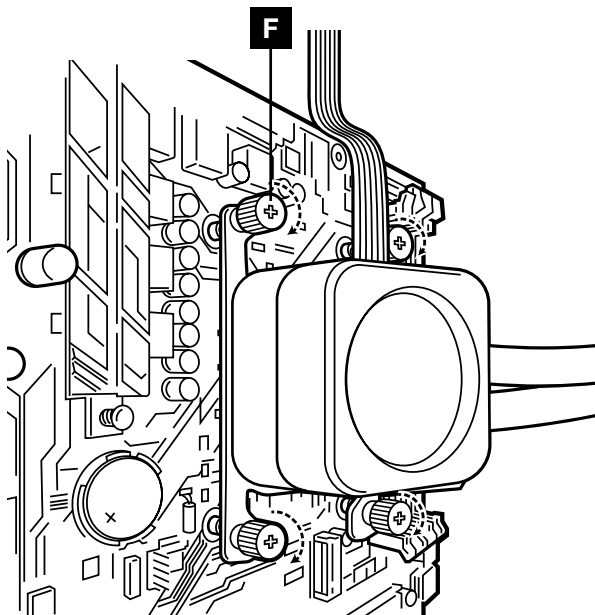

















- Align the bracket with the AMD AM5/AM4 standoffs as shown. Tighten the thumbscrews (F) until secure.

Please continue to Page 10 to continue your installation.

INCLUDED HARDWARE

Highlighted parts for AMD sTRX4 installation only

<p>A</p>  <p>x4 INTEL 1200/1150/1151/1156/1155 STANDOFFS</p>	<p>B</p>  <p>x4 INTEL 2011/2011-3/2066 STANDOFFS</p>	<p>C</p>  <p>x4 INTEL 1700 STANDOFFS</p>
<p>D</p>  <p>x1 INTEL BACKPLATE</p>	<p>E</p>  <p>x1 INTEL MOUNTING BRACKET (PRE-INSTALLED)</p>	<p>F</p>  <p>x4 THUMBSCREWS</p>
<p>G</p>  <p>x4 AMD AM5/AM4 STANDOFFS</p>	<p>H</p>  <p>x1 AMD AM5/AM4 MOUNTING BRACKET</p>	<p>I</p>  <p>x1 AMD sTR4/sTRX4 MOUNTING BRACKET</p>
<p>J</p>  <p>x4 AMD sTR4/sTRX4 STANDOFFS</p>	<p>K</p>  <p>x16 LONG FAN SCREWS (H100i) x24 LONG FAN SCREWS (H150i/H170i)</p>	<p>L</p>  <p>x8 RADIATOR SCREWS (H100i) x12 RADIATOR SCREWS (H150i/H170i)</p>
<p>M</p>  <p>x8 WASHERS (H100i) x12 WASHERS (H150i/H170i)</p>	<p>N</p>  <p>x2 AF RGB ELITE FANS (H100i) x3 AF RGB ELITE FANS (H150i/H170i)</p>	<p>O</p>  <p>COMMANDER CORE</p>
<p>P</p>  <p>USB Y-SPLITTER</p>		

1. INSTALLING THE AMD sTRX4 MOUNTING BRACKET

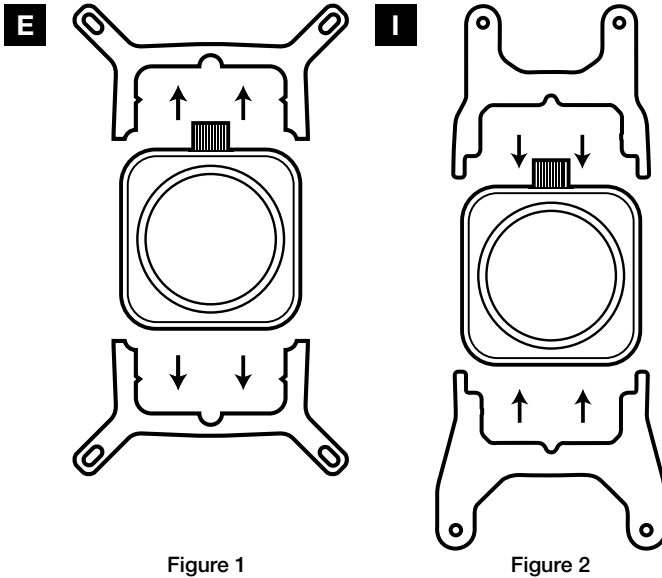



Figure 1

Figure 2

- > Remove the integrated Intel mounting bracket (Figure 1).
- > Install the AMD sTRX4 bracket by pushing both sides into the slot on the pump until secure (Figure 2).


Note: It is important that the AMD sTRX4 retention bracket be evenly secured on all sides before installation.

2. INSTALLING THE AMD sTRX4 STANDOFF SCREWS

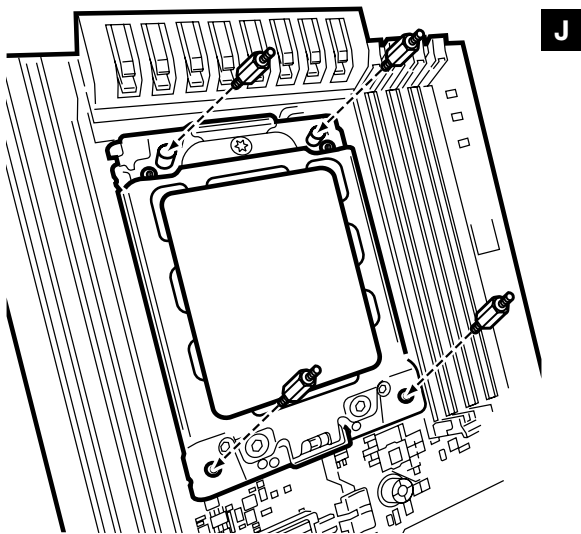


- > Attach the provided AMD sTRX4 standoffs to the CPU socket.
- > Tighten all four screws until firmly secure.

3. INSTALL THE FANS AND RADIATOR

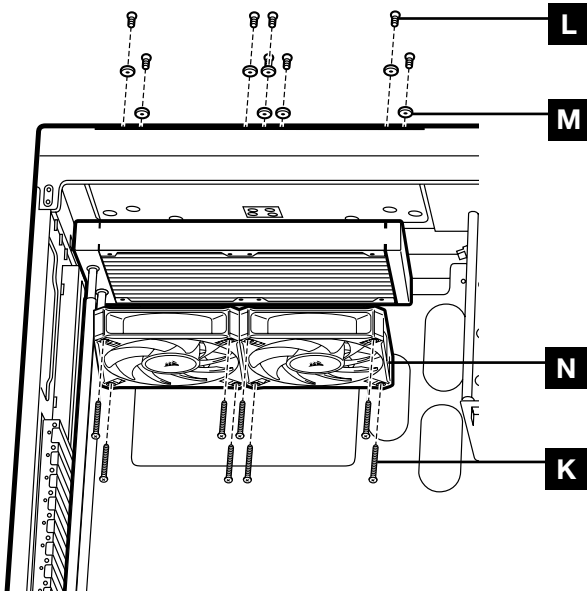

Attach the radiator and the fans as shown. For the best cooling performance, we recommend mounting the fans as an air-intake to your PC case.

4. INSTALLING THE PUMP UNIT

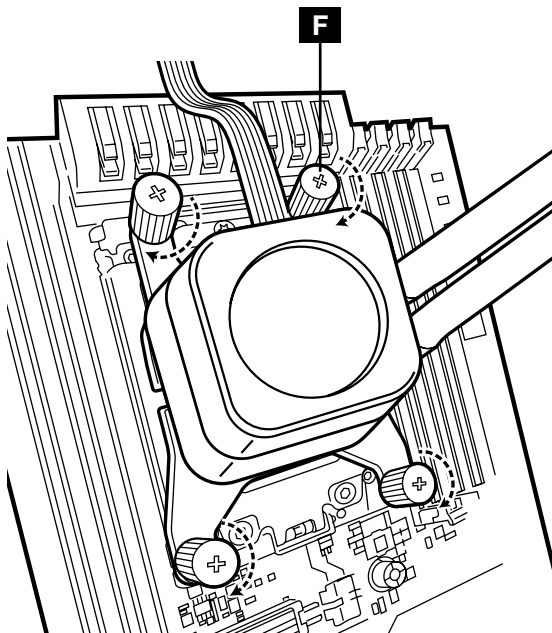

- > Align the bracket and pump over the standoff screws as shown.
- > Attach the thumbscrews (F) to the standoff screws as shown.
- > Tighten the thumbscrews until all four corners are firmly secured.

Please continue to Page 10 to continue your installation.

CONNECT FANS AND PUMP TO COMMANDER CORE

- > Connect pump 24-pin cable to your Commander CORE (Figure 1).
- > Connect pump tach cable to the CPU_FAN header on your motherboard (Figure 2).
- > Connect each fan to the Commander CORE (Figure 3).
- > Connect each fan RGB lead to the Commander CORE (Figure 3).

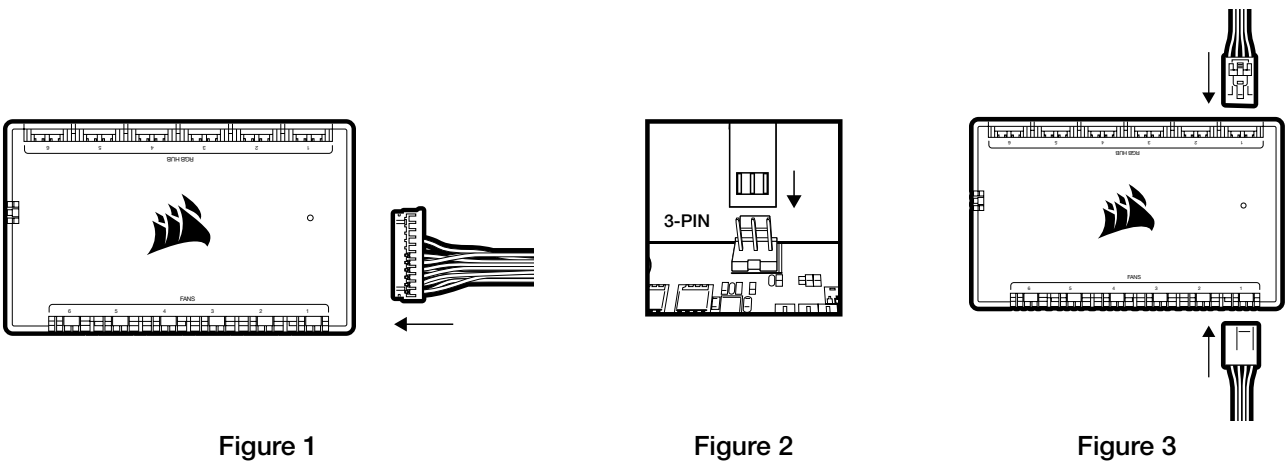



Figure 1

Figure 2

Figure 3

CONNECT COMMANDER CORE AND ELITE LCD XT MODULE TO USB 2.0 HEADER AND POWER

- > Using the attached USB cable, connect the Commander CORE to a motherboard USB 2.0 header.
- > Connect pump power cable to an available SATA power plug from your power supply.
- > Use included USB Y-Splitter to reduce required USB ports from 2x to 1x.

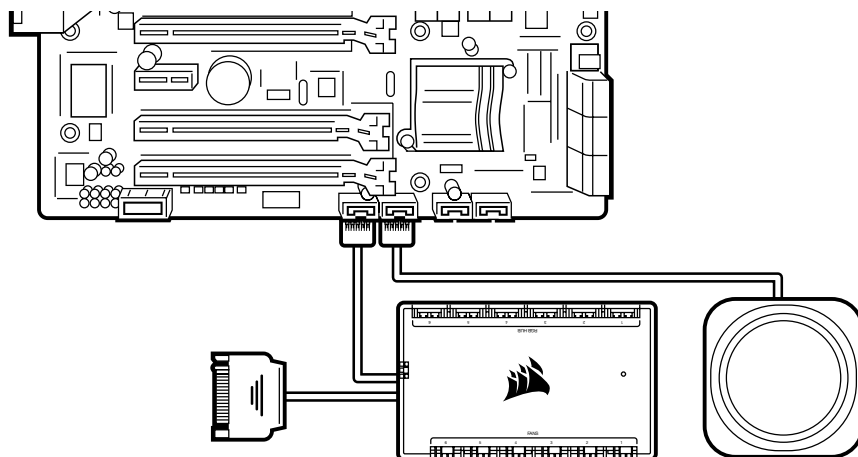

FAQ

1. How do I know the direction of the airflow of the fan?


An arrow located on the side of the fan indicates the direction of airflow.

2. Can I reuse the pre-applied thermal paste on the cooler for re-installation?

Re-installation of the cooler will require you to clean off the pre-applied thermal paste and re-apply the XTM70 thermal paste (sold separately).

3. What orientation should I install my radiator?

The best way to install a radiator is with the tubes on the bottom of the case, though you can install it with the tubes in any position, including an inverted radiator, as long as the highest point in the radiator is visibly higher than the CPU pump.

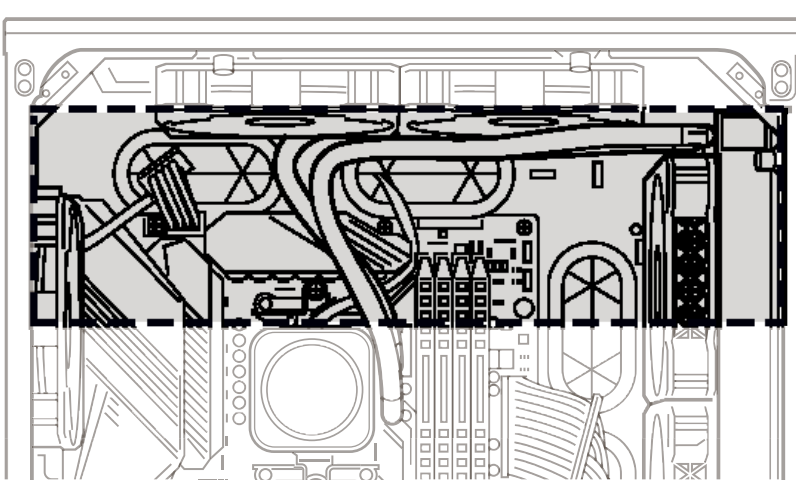

4. My cooler and fans are blinking red or not functioning. What do I do?

Please double check all connections from the cooler and fans to the Commander CORE. Ensure that the Commander CORE and LCD module are update to the most recent firmware via iCUE. If this does not resolve your problems, please open a ticket at support.corsair.com or contact our customer support team for further troubleshooting and assistance.

<https://help.corsair.com/hc/en-us/requests/new>

5. What should I do if my cooler backplate feels loose after installation?

It is common for your cooler backplate to feel loose after you install it into your motherboard for the first time. Once you have seated and tightened down the cooler pump, it will pull the backplate to the motherboard and apply pressure on the socket via the cooler.

IMPORTANT: Do NOT, under any circumstances, add additional washers and spacers to your backplate to decrease play in the backplate. Doing so will increase the mounting pressure to the retention kit and potentially damage your retention kit, motherboard, or socket.



Web: corsair.com

Phone: (888) 222-4346

Warranty: corsair.com/support/warranty

Support: support.corsair.com

Blog: corsair.com/blog

Forum: forum.corsair.com

YouTube: youtube.com/corsairhowto

© 2023 **CORSAIR MEMORY, Inc.** All rights reserved. CORSAIR and the sails logo are registered trademarks of CORSAIR in the United States and/or other countries. All other trademarks are the property of their respective owners. Product may vary slightly from those pictured.

49-002654 AA



K R-R-CSI-RWF0048
R-R-CSI-RWF0070
R-R-CSI-RWF0077
R-R-CSI-RWF0078
R-R-CSI-RWF0085