



## EZVIZ H6c 2K+ Cube IP security camera Indoor 2560 x 1440 pixels Desk

**Brand :** EZVIZ


**Product code:** CS-H6C-R100-8B4WF

**Product name :** H6c 2K+

EZVIZ H6c 2K+. Type: IP security camera, Placement supported: Indoor, Connectivity technology: Wired & Wireless. Mounting type: Desk, Product colour: White, Form factor: Cube. Lens viewing angle, horizontal: 75°, Lens viewing angle, vertical: 45°, Lens viewing angle, diagonal: 85°. Sensor type: CMOS, Optical sensor size: 25.4 / 3 mm (1 / 3"). Lens diameter: 4 mm



| Performance                       |  | Network                     |   |
|-----------------------------------|--|-----------------------------|---|
| Type *                            | IP security camera                         | Wi-Fi *                     | ✓   |
| Placement supported *             | Indoor                                     | Wi-Fi standards             | 802.11b, 802.11g, Wi-Fi 4 (802.11n)                   |
| Connectivity technology *         | Wired & Wireless                           | Wi-Fi data rate (max)       | 72 Mbit/s   |
| Auto-tracking                     | ✓  | Bluetooth *                 | ✗   |
| Infrared (IR) cut-off filter      | ✓  | Channel bandwidth           | 20 MHz  |
| Certification                     | CE / UL / FCC / WEEE / REACH / RoHS / UKCA | Storage                     |   |
| Design                            |  | Built-in HDD *              | ✗   |
| Form factor *                     | Cube                                       | Card reader integrated      | ✓   |
| Mounting type *                   | Desk                                       | Compatible memory cards     | MicroSD (TransFlash)                                  |
| Product colour *                  | White                                      | Maximum memory card size    | 256 GB  |
| Camera                            |  | Ports & interfaces          |   |
| Camera tilt control               | ✓  | Ethernet LAN (RJ-45) ports  | 1   |
| Lens viewing angle, horizontal    | 75°  | Security                    |   |
| Lens viewing angle, vertical      | 45°  | Security algorithms         | 64-bit WEP, 128-bit WEP, WPA, WPA-PSK, WPA2, WPA2-PSK |
| Lens viewing angle, diagonal      | 85°  | Power                       |   |
| Image sensor                      |  | Power source type *         | DC  |
| Optical sensor size               | 25.4 / 3 mm (1 / 3")                       | Power consumption (max)     | 5 W   |
| Sensor type *                     | CMOS                                       | DC output voltage           | 5   |
| Lens system                       |  | DC output current           | 1 A   |
| Lens diameter                     | 4 mm                                       | Operational conditions      |   |
| Night vision                      |  | Operating temperature (T-T) | -10 - 45 °C   |
| Night vision *                    | ✓  | Weight & dimensions         |   |
| Night vision distance             | 10 m                                       | Width                       | 88.2 mm   |
| Video                             |  | Depth                       | 88.2 mm   |
| Maximum resolution *              | 2560 x 1440 pixels                         | Height                      | 119 mm  |
| Total megapixels *                | 4 MP                                       | Weight                      | 218 g   |
| Video compression formats         | H.264, H.265                               | Packaging data              |   |
| Digital Wide Dynamic Range (DWDR) | ✓  | Package width               | 103 mm  |
| Network                           |  | Package depth               | 103 mm  |
| Ethernet LAN *                    | ✓  | Package height              | 186 mm  |
| Ethernet interface type           | Fast Ethernet                              | Packaging content           |   |
|                                   |  | Number of cameras *         | 1   |
|                                   |  | Screws included             | ✓   |
|                                   |  | Drilling template included  | ✓   |

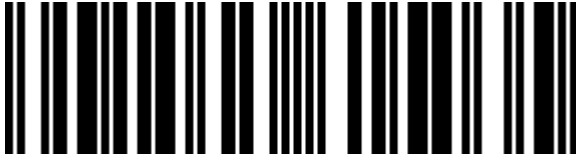

6941545615035

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 19-DEC-2024. Prints or copies of Information are only valid on the printed Publication date