PHILIPS

Philips Signage Solutions X-Line Videowall Digitaalinen litteä infotaulu 165,1 cm (65") LED 500 cd/m² 4K Ultra HD musta

Tuotemerkki : Philips   **Tuoteperhe:** Signage Solutions   **Tuotekoodi:** 65BDL6005X/00

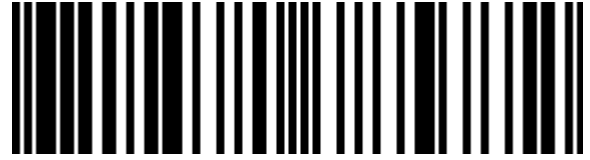**Tuotteen nimi :** X-Line Videowall

Philips Signage Solutions X-Line Videowall. Tuotteen muotoilu: Digitaalinen litteä infotaulu. Näytön halkaisija: 165,1 cm (65"), Näytön teknologia: LED, Näytön erottelutarkkuus: 3840 x 2160 pikseliä, Näytön kirkkaus: 500 cd/m², HD-tyyppi: 4K Ultra HD. Tuotteen väri: musta

Display

LED backlighting type	Direct-LED
Display diagonal *	165.1 cm (65")
Display technology *	LED
Display resolution *	3840 x 2160 pixels
Display brightness *	500 cd/m²
HD type *	4K Ultra HD
Touchscreen *	✗
Native aspect ratio	16:9
Response time	8 ms
Contrast ratio (typical)	1300:1
Contrast ratio (dynamic)	500000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	1.07 billion colours
Pixel pitch	0.372 x 0.372 mm
Display diagonal (metric)	164 cm
Native refresh rate	60 Hz
Haze rate	25%

Ports & interfaces

HDMI ports quantity *	2
HDMI version	2.0
HDMI input ports quantity	2
DVI port *	✔
DVI-D ports quantity	1
VGA (D-Sub) input ports	1
DisplayPorts quantity *	2
DisplayPorts in	1
DisplayPorts out	1
DisplayPort version	1.2
USB port *	✔
USB ports quantity	1
USB version	2.0
Ethernet LAN *	✔
Wi-Fi *	✗
Number of speaker outputs	1
RS-232 interface	✔
Remote (IR) input	1
Remote (IR) output	1

Audio

Built-in speaker(s) *	✔
Number of built-in speakers	2
RMS rated power	20 W

Performance

Purpose *	Universal
On Screen Display (OSD)	✔
Number of OSD languages	12
On Screen Display (OSD) languages	Arabic, Simplified Chinese, Traditional Chinese, German, English, Spanish, French, Italian, Japanese, Polish, Russian, Turkish
Open Pluggable Specification (OPS)	✔
Mean time between failures (MTBF)	50000 h

Power

Power consumption (typical) *	210 W
Power consumption (standby) *	0.5 W
Power consumption (max)	400 W

Computer system

Computer system *	✗
Built-in processor *	✗

Weight & dimensions

Width	1432.6 mm
Depth	88.8 mm
Height	807.6 mm

Packaging content

Remote control included	✔
Batteries included	✔
Cables included	AC, DisplayPort, IR sensor, LAN (RJ-45)

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	20 - 80%
Storage temperature (T-T)	-20 - 60 °C
Storage relative humidity (H-H)	5 - 95%
Operating altitude	0 - 3000 m

Certificates

Certification	FCC, Class A CB ETL

Features

Wall mountable	✔

Technical details

Energy saving functions	Smart Power
Signal loop through	DisplayPort, LAN, IR and RS232 via RJ45
Set depth (inch)	8.89 cm (3.5")

Design

Product design *	Digital signage flat panel
Placement supported *	Indoor
Orientation	Horizontal/Vertical
Product colour *	Black
VESA mounting *	✔
Panel mounting interface	400 x 400 mm

Technical details

Set height (inch)	80.8 cm (31.8")
Set width (inch)	143.3 cm (56.4")
Tiled Matrix	Up to 10 x 10
Sustainability compliance	✔
Warranty period	3 year(s)
Compliance certificates	CE, RoHS

Other features

Quick start guide	✔
Network controllable	RJ-45
Screen saving functions	✔
Bezel width	2.3 mm

4043678675916

8712581785772

0685417581788

685417581788