

Lindy 8m USB 3.0 Active Extension Pro

Brand : Lindy

Product code: 43158

Product name : 8m USB 3.0 Active Extension Pro

- High performance, active cable that provides an extended 8m connection between a computer and USB 3.0 device
- Can be used standalone or as part of the Lindy Active Extension System Pro to create bespoke extension systems of over 40m (depending on the cables used)
- Supports the full USB 3.0 SuperSpeed bandwidth for speeds of 5Gbps
- Easy to use □ connects to the device and existing USB cable (2m maximum)
- 2 year warranty

8m USB 3.0 Active Extension Pro

Lindy 8m USB 3.0 Active Extension Pro. Cable length: 8 m. Connector 1: USB A, Connector 2: USB A, USB version: USB 3.2 Gen 1 (3.1 Gen 1), Maximum data transfer rate: 5 Gbit/s, Connector contacts plating: Gold, Product colour: Black



Features

USB version *	USB 3.2 Gen 1 (3.1 Gen 1)
Connector 1 *	USB A
Connector 2 *	USB A
Connector 1 gender *	Male
Connector 2 gender *	Female
Connector 1 form factor	Straight
Connector 2 form factor	Straight
AWG wire size	24/24/20
Connector material	Nickel
Contact material	Brass
Connector contacts plating	Gold
Cable jacket material	Polyvinyl chloride (PVC)
Conductor material	Tinned copper
Connector shielding	✓
Connector shield material	Aluminium
Connector housing material	Plastic
Maximum data transfer rate	5000 Mbit/s
Maximum data transfer rate	5 Gbit/s
Product colour *	Black
Cable type	Round cable
Transmission medium	Twisted pair
Nominal attenuation	0.064MHz - 0.08dB 0.256MHz - 0.11dB 0.512MHz - 0.13dB 0.772MHz - 0.15dB 1.0MHz - 0.20dB 4MHz - 0.39dB 8MHz - 0.57dB 12MHz - 0.67dB 24MHz - 0.95dB 48MHz - 1.35dB 96MHz - 1.90dB 200MHz - 3.20dB 400MHz - 5.80dB

Features

Certification CE, UKCA, FCC, RoHS, REACH, California Proposition 65

Power

Power note 2.5/0.7mm DC

Weight & dimensions

Cable length *	8 m
Cable diameter	7 mm
Weight	750 g
Bend radius (min)	3.6 cm
Connector 1 dimensions (WxDxH)	15 x 49 x 8 mm
Connector 2 dimensions (WxDxH)	20 x 80 x 13 mm

Packaging data

Package type	Box
Package width	240 mm
Package depth	70 mm
Package height	200 mm
Package weight	900 g

Packaging content


Quantity per pack *	1 pc(s)
Manual	✓

Operational conditions

Operating temperature (T-T)	0 - 50 °C
Storage temperature (T-T)	-20 - 60 °C

Logistics data

Harmonized System (HS) code	84733080
-----------------------------	----------

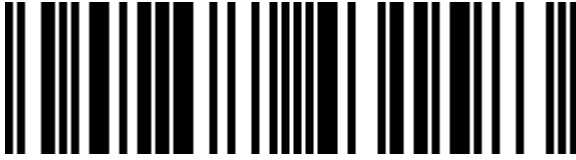

4002888431583



5054484523260

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.