

Canon i-SENSYS MF465dw Laser A4 1200 x 1200 DPI 40 ppm Wi-Fi

Tuotemerkki : Canon

Tuoteperhe: i-SENSYS

Tuotekoodi: 5951C007


Tuotteen nimi : MF465dw

Canon i-SENSYS MF465dw. Tulostustekniikka: Laser, Tulostus: Yksittäistulostus, Suurin resoluutio: 1200 x 1200 DPI. Kopiointi: Yksittäiskopiointi, Kopioinnin enimmäistarkkuus: 600 x 600 DPI. Skannaus: Väriskannaus, Optinen skannauserottelutarkkuus: 600 x 600 DPI. Faksaus: Yksittäisfaksin lähetyks. Kaksipuolinen toiminto: Kopiointi, Faksi, Tulosta, Skannaus. Suurin ISO A-luokan paperikoko: A4. Wi-Fi. Suoratulostus. Tuotteen väri: musta, Valkoinen



Printing		Paper handling	
Print technology *	Laser	ISO B-series sizes (B0...B9)	B5
Printing *	Mono printing	Non-ISO print media sizes	Executive, Legal, Letter, Oficio, Statement
Duplex printing *	✓	Envelopes sizes	C5, Com-10, DL, Monarch
Maximum resolution *	1200 x 1200 DPI	Custom media width	105 - 215.9 mm
Print speed (black, normal quality, A4/US Letter) *	40 ppm	Custom media length	128 - 355.6 mm
Warm-up time	14 s	Paper tray media weight	60 - 120 g/m ²
Time to first page (black, normal)	5 s	Multi-Purpose Tray media weight	60 - 199 g/m ²
Secure printing	✓	Ports & interfaces	
Copying		Direct printing *	✓
Duplex copying *	✓	USB port	✓
Duplex copying mode	Auto	Network	
Copying *	Mono copying	Wi-Fi *	✓
Maximum copy resolution *	600 x 600 DPI	Ethernet LAN *	✓
Time to first copy (black, normal)	6.1 s	Cabling technology	10/100/1000Base-T(X)
Maximum number of copies	999 copies	Ethernet LAN data rates	10,100,1000 Mbit/s
Copier resize	25 - 400%	Wi-Fi standards	802.11b, 802.11g, Wi-Fi 4 (802.11n)
N-in-1 copy function	✓	Security algorithms	WPA2-AES, WPA2-EAP, 64-bit WEP, WPA2-PSK, 128-bit WEP, WPA2-TKIP, WPA-AES, WPA-EAP, WPA-PSK, WPA-TKIP
N-in-1 copy function (N=)	2, 4	Management protocols	SNMPv1, SNMPv3
ID-card copy function	✓	Mobile printing technologies	Apple AirPrint, Canon PRINT Business, Mopria Print Service
Scanning		Performance	
Duplex scanning *	✓	Internal storage capacity	4 GB
Scanning *	Colour scanning	Internal memory *	1024 MB
Optical scanning resolution *	600 x 600 DPI	Built-in processor	✓
Scanner type *	ADF scanner		
Scan to	Cloud, E-mail, FTP, PC, USB		
Input colour depth	24 bit		

Scanning		Performance	
Output colour depth	24 bit	Processor frequency	1200 MHz
Greyscale levels	256	Design	
Scan drivers	ICA, TWAIN, WIA	Product colour *	Black, White
Fax		Market positioning *	Business
Duplex faxing	✓	Built-in display *	✓
Faxing *	Mono faxing	Display	LCD
Fax memory	512 pages	Control type	Touch
Speed dialling	✓	Power	
Features		Power consumption (max)	1280 W
Recommended duty cycle	750 - 4000 pages per month	Power consumption (printing)	480 W
Maximum duty cycle *	80000 pages per month	Power consumption (standby)	8 W
Duplex functions *	Copy, Fax, Print, Scan	Power consumption (sleep)	0.9 W
Number of print cartridges *	1	Energy Star Typical Electricity Consumption (TEC)	0.32 kWh/week
Printing colours *	Black	AC input voltage	220 - 240 V
Page description languages	PCL 5e, PCL 6, PostScript 3, UFR II	AC input frequency	50/60 Hz
Input & output capacity		System requirements	
Total number of input trays *	1	Windows operating systems supported	Windows 10, Windows 11
Total input capacity *	250 sheets		Mac OS X 10.15 Catalina, Mac OS X 10.7 Lion, Mac OS X 10.15.3 Catalina, Mac OS X 10.7.5 Lion, Mac OS X 10.2 Jaguar, Mac OS X 10.8 Mountain Lion, Mac OS X 10.3 Panther, Mac OS X 10.9 Mavericks, Mac OS X 10.4 Tiger, Mac OS X 11.0 Big Sur, Mac OS X 10.13 High Sierra, Mac OS X 10.5 Leopard, Mac OS X 12.0 Monterey, Mac OS X 10.14 Mojave, Mac OS X 10.6 Snow Leopard, Mac OS X 13.0 Ventura
Total output capacity *	150 sheets	Mac operating systems supported	
Multi-Purpose tray	✓	Linux operating systems supported	✓
Multi-Purpose tray input capacity	100 sheets		Windows Server 2019, Windows Server 2012 R2, Windows Server 2022, Windows Server 2016, Windows Server 2012
Maximum input capacity	900 sheets	Server operating systems supported	
Paper handling		Operational conditions	
Maximum ISO A-series paper size *	A4	Operating relative humidity (H-H)	20 - 80%
Paper tray media types *	Envelopes, Heavy paper, Labels, Plain paper, Postcard, Recycled paper, Thin paper	Operating temperature (T-T)	10 - 30 °C
ISO A-series sizes (A0...A9) *	A4, A5, A6	Weight & dimensions	
		Width	420 mm
		Depth	460 mm
		Height	375 mm
		Weight	16.3 kg

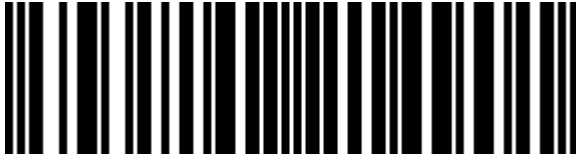

4549292214901

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 22-DEC-2024. Prints or copies of Information are only valid on the printed Publication date