

## Samsung QB43C Digital signage flat panel 109.2 cm (43") LCD Wi-Fi 350 cd/m<sup>2</sup> 4K Ultra HD Black Built-in processor Tizen 7.0 16/7

**Brand :** Samsung

**Product family:** QBC

**Product code:**  
LH43QBCEBGCXEN


**Product name :** QB43C



Samsung QB43C. Product design: Digital signage flat panel. Display diagonal: 109.2 cm (43"), Display technology: LCD, Display resolution: 3840 x 2160 pixels, Display brightness: 350 cd/m<sup>2</sup>, HD type: 4K Ultra HD. Wi-Fi. Operating hours (hours/days): 16/7. Operating system installed: Tizen 7.0. Product colour: Black

| Display                               |                       | Design                                  |                      |
|---------------------------------------|-----------------------|---|----------------------|
| Panel type                            | VA                    | Mounting type                           | Wall                 |
| Display diagonal *                    | 109.2 cm (43")        | <b>Performance</b>                      |                      |
| Display technology *                  | LCD                   | Purpose *                               | Universal            |
| Display resolution *                  | 3840 x 2160 pixels    | Operating hours (hours/days)            | 16/7                 |
| Display brightness *                  | 350 cd/m <sup>2</sup> | HDCP                                    | ✓                    |
| HD type *                             | 4K Ultra HD           | HDCP version                            | 2.2                  |
| Touchscreen *                         | ✗                     | <b>Power</b>                            |                      |
| Response time                         | 8 ms                  | Power consumption (typical) *           | 121 W                |
| Contrast ratio (typical)              | 4000:1                | Power consumption (sleep)               | 0.5 W                |
| Dynamic contrast ratio marketing name | Mega Contrast         | Energy efficiency class (SDR)           | G                    |
| Viewing angle, horizontal             | 178°                  | Energy consumption (SDR) per 1000 hours | 74 kWh               |
| Viewing angle, vertical               | 178°                  | AC input voltage                        | 100 - 240 V          |
| Pixel pitch                           | 0.245 x 0.245 mm      | AC input frequency                      | 50/60 Hz             |
| Display diagonal (metric)             | 108 cm                | Energy efficiency scale                 | A to G               |
| Horizontal scan range                 | 30 - 81 kHz           | <b>Computer system</b>                  |                      |
| Vertical scan range                   | 48 - 75 Hz            | Computer system *                       | ✓                    |
| Haze rate                             | 2%                    | Computer system type                    | System on Chip (SoC) |
| Pixel frequency (max)                 | 594 MHz               | Built-in processor *                    | ✓                    |
| RGB colour space                      | NTSC                  | Operating system installed              | Tizen 7.0            |
| Colour gamut                          | 72%                   | <b>Weight &amp; dimensions</b>          |                      |
| <b>Ports &amp; interfaces</b>         |                       | Display width                           | 969.5 mm             |
| HDMI ports quantity *                 | 3                     | Display depth                           | 28.5 mm              |
| HDMI version                          | 2.0                   | Display height                          | 557.8 mm             |
| HDMI input ports quantity             | 3                     | Display weight                          | 8.8 kg               |
| DVI port *                            | ✗                     | <b>Packaging data</b>                   |                      |
| USB port *                            | ✓                     | Package width                           | 1093 mm              |
| USB ports quantity                    | 2                     | Package depth                           | 126 mm               |
| Ethernet LAN *                        | ✓                     | Package height                          | 667 mm               |
| Ethernet LAN (RJ-45) ports            | 1                     | Package weight                          | 11.3 kg              |
| Wi-Fi *                               | ✓                     | <b>Operational conditions</b>           |                      |
| RS-232 interface                      | ✓                     | Operating temperature (T-T)             | 0 - 40 °C            |
| Infrared data port                    | ✓                     | Operating relative humidity (H-H)       | 10 - 80%             |
| Remote (IR) input                     | 1                     |   |                      |

| Design                   |                            | Certificates          |                          |
|--------------------------|----------------------------|-----------------------|--------------------------|
| Product design *         | Digital signage flat panel | Certification         | Class B 60950-1, 62368-1 |
| Placement supported *    | Indoor                     | Technical details     |                          |
| Product colour *         | Black                      | Audio out (mini jack) | 1                        |
| Screen shape             | Flat                       | Other features        |                          |
| VESA mounting *          | ✓                          | Bluetooth             | ✓                        |
| Panel mounting interface | 200 x 200 mm               | Flash memory          | 8000 MB                  |
| Bezel width (bottom)     | 1.15 cm                    | RS-232 input ports    | 1                        |
| Bezel width (side)       | 1.15 cm                    | RS-232 output ports   | 1                        |
| Bezel width (top)        | 1.15 cm                    | RJ-45 input ports     | 1                        |
| Bezel colour             | Charcoal Black             | Optional features     | WMN-B50SC STN-L4355C     |

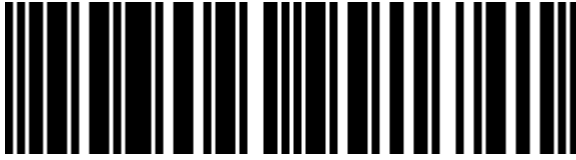

8806094991741

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 22-DEC-2024. Prints or copies of Information are only valid on the printed Publication date