


# PowerWalker Charger EC240-4A /8A /12A /24A

4A / 8A / 12A / 24A Super Charger

Compatible with BPs with 240VDC (20 batteries)


Perfect solution for External Batteries

Terminal input and Anen connector output

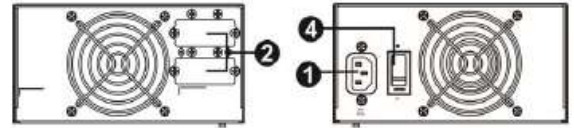

4A Item-No. 10136005 (on pic)  
 8A Item-No. 10136006  
 12A Item-No. 10136007  
 24A Item-No. 10136008

With this External Charger you can speed up charging of your external batteries. We offer the charger with 4-24A output current. For time efficient charging it is recommended to provide a specific current level for your battery bank or set of battery packs. Total battery capacity in Ah divided by 10h is recommended (i.e. 120Ah -> 12A Charger).

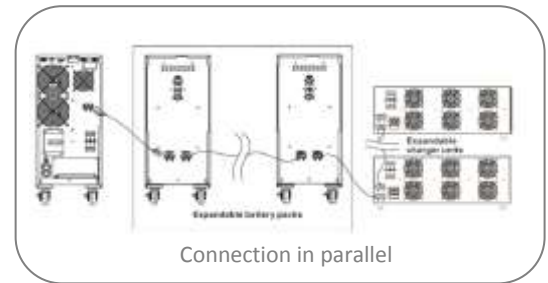

## Product Details

<b>Output current</b>	4A	8A	12A	24A
<b>Power</b>	900W	1700W	2600W	5200W

## Input Characteristics

<b>Input Voltage</b>	(110~300)VAC @ Full Load			
<b>Max. Current</b>	10A	20A	30A	60A
<b>Input Frequency</b>	(46~64)Hz for 50Hz system			

## Output Characteristics

<b>Output Voltage</b>	Min. 200VDC; Nom. 273VDC; Max 280VDC
<b>Voltage ripple</b>	1% @ full load
<b>Current ripple</b>	10% of Ah CAP @ full load
<b>Efficiency</b>	>85%

## Environment

<b>Temperature</b>	0 to 40 deg C
<b>Humidity</b>	<95% (no condensation)
<b>Noise Level</b>	<45dB
<b>Storage</b>	-15 to 60 deg C

## Mechanical Characteristics

<b>Inlet</b>	Terminal Block			
<b>Outlet</b>	Anen Connector			
<b>Dimensions</b>	298mm	357mm	515mm	570mm
	175mm	220mm	220mm	250mm
	106mm	136mm	136mm	215mm
<b>Net weight</b>	4,1kg	5,6kg	7,2kg	14kg
<b>EAN:</b>	426007497..	..8087	..8094	..8100
			..8117	

Version: EN 26/11/2015  
 We reserve the right for technical changes and mistakes