# PRODUCT DATASHEET
## LED WORKLIGHT S-STAND 20 W 4000 K

**WORKLIGHTS S-STAND | Flexible, portable worklight**



### AREAS OF APPLICATION

– Renovation
– Garages
– Basement
– Workshops

### PRODUCT BENEFITS

– Optimized weight and size due to compact design
– Energy savings of up to 80% compared to halogen lamp worklights
– Semi-frosted, tempered glass cover for uniform illumination

### PRODUCT FEATURES

– Worklight with swiveling head
– Type of protection: IP65
– Quick-release fastener for adjustment of luminaire head angle
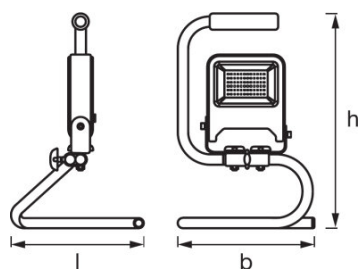– 2 m cable with type E/F plug

## TECHNICAL DATA

### Electrical data

| | |
|---|---|
| **Nominal wattage** | 20.00 W |
| **Operating mode** | Electronic control gear (ECG) |
| **Nominal voltage** | 220...240 V |
| **Mains frequency** | 50/60 Hz |

### Photometrical data

| | |
|---|---|
| **Color temperature** | 4000 K |
| **Color rendering index Ra** | ≥80 |
| **Light color (designation)** | Cool White |
| **Luminous flux** | 1700 lm |
| **Luminous efficacy** | 85 lm/W |

### Dimensions & weight



| | |
|---|---|
| **Length** | 166.0 mm |
| **Width** | 180.0 mm |
| **Height** | 280.0 mm |
| **Product weight** | 960.00 g |

### Colors & materials

| | |
|---|---|
| **Body material** | Aluminum/Steel |
| **Housing color** | Dark gray |
| **Product color** | Dark gray |
| **Housing color** | Dark gray |
| **Cover material** | Glass |

### Temperatures & operating conditions

| | |
|---|---|
| **Ambient temperature range** | -20...+45 °C |

## Additional product data

| Mounting type | Standing |
|---|---|
| Mounting location | Floor |

## Capabilities

| Dimmable | No |
|---|---|
| Adjustable | Yes |
| Type of connection | Protective contact Plug type |
| LED module replaceable | Not replaceable |

## Certificates & standards

| Protection class | I |
|---|---|
| Type of protection | IP65 |
| Standards | CE/EAC/REACH/ROHS |

## EQUIPMENT / ACCESSORIES

– Complete mounting and connecting accessories included

## LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---|---|---|---|---|
| 4058075213838 | Folding carton box 1 | 81 mm x 181 mm x 245 mm | 1028.00 g | 3.59 dm³ |
| 4058075213845 | Shipping carton box 10 | 415 mm x 375 mm x 265 mm | 10872.00 g | 41.24 dm³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.