


Delock PCI Express Card to 1 x Serial RS-232

Description

The Delock PCI Express card expands a PC by one external serial port. Different devices such as scanner, printer, mouse etc. can be connected to this card. By using the included low profile bracket, the PCI Express card can be also installed into a Mini-PC.

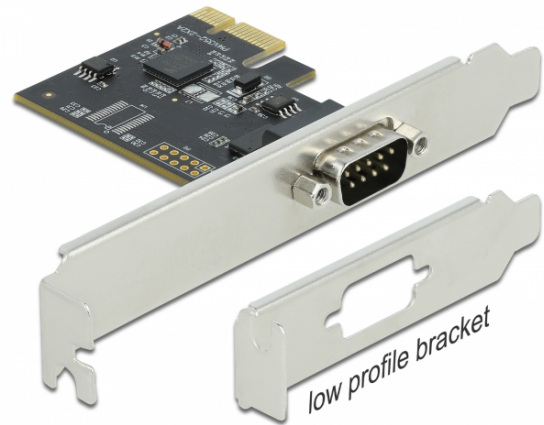

Specification

- Connectors:
 - external: 1 x serial RS-232 DB9 male
 - internal: 1 x PCI Express x1, V2.0
- Chipset: Exar XR17V352
- Data transfer rate up to 230.4 Kbps
- FIFO: 256 byte
- Compatible with 16C550 UART
- Databits: 5, 6, 7, 8
- Stop bits: 1, 1.5, 2
- Parity: even, odd, none, mark, space
- Flow control: none, hardware RTS / CTS, software XON / XOFF
- Dimensions (LxW): ca. 64 x 45 mm

System requirements

- Windows 8.1/8.1-64/10/10-64
- PC with one free PCI Express slot

Package content

- PCI Express card
- Low profile bracket
- Driver CD
- User manual


Item no. 90000

EAN: 4043619900008

Country of origin: China

Package: • Retail Box

Images



General	
Form factor:	Low Profile
Specification:	RS-232 (EIA / TIA) PCI Express 2.0
Supported operating system:	Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
Slot:	PCIe
Interface	
Connector 1:	1 x PCI Express x1
Connector 2:	1 x Serial RS-232 DB9 male
Technical characteristics	
Chipset:	Exar 17V352
Data transfer rate:	up to 230.4 Kb/s
FIFO:	1 x 256 Byte
Signal transmission:	TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND
Data transmission:	asynchronous Bi-directional Half duplex full duplex
UART:	16C550
Data bits:	5, 6, 7, 8
Physical characteristics	
Screw type:	#4-40 UNC
Slot bracket:	low profile standard
Width:	45 mm
Height:	64 mm
Colour:	black