


AXIS I/O Indication LED

Clean and simple design

AXIS I/O Indication LED lets you easily see if the camera is active or not, for instance when there is concern for privacy or when you want to deter antisocial and criminal behavior. The sleek, simple design of AXIS I/O Indication LED makes it ideal for surveillance within retail, transport and healthcare environments. Quick to install with an adhesive strip, and using only one cable to connect to the I/O port of the camera. Easy to setup and configure within the camera's settings.

- > **Notify when recording**
- > **Active on motion detection**
- > **Quick and easy to install**

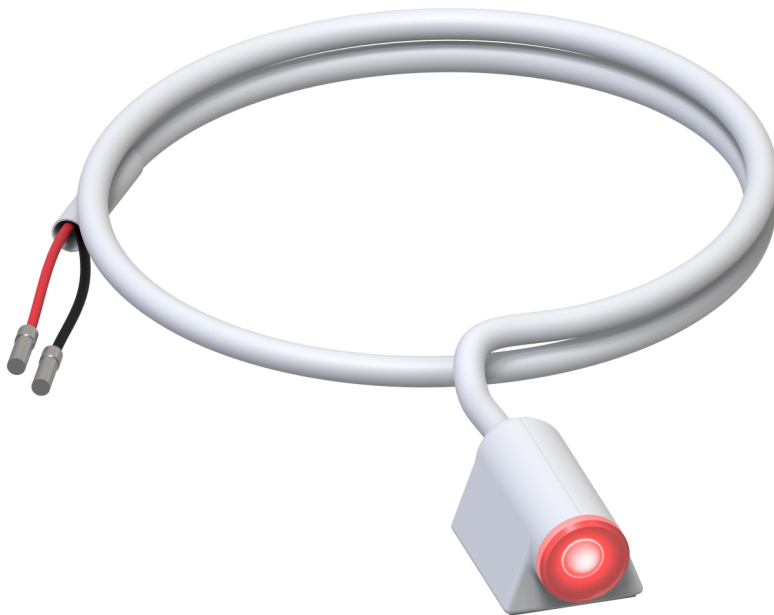

AXIS I/O Indication LED

General	
Casing	Plastic casing IP44-rated Color: white NCS S 1002-B
Sustainability	PVC free
Power	Input voltage: 12 V DC (Powered by device via I/O connector) Current required: 15 mA
Operating conditions	-20 °C to 70 °C (-4 °F to 158 °F) Humidity 00–100% RH (non-condensing)
Storage conditions	-40 °C to 70 °C (-40 °F to 158 °F)

Approvals	Environment EN 50581, IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-14, IEC/EN 60529 IP44
Dimensions	Height: 11 mm (0.43 in) Width: 14 mm (0.55 in) 400 mm (15.7 in) cable
Weight	8 g (0.018 lb)
Warranty	Axis 3-year warranty, see axis.com/warranty

Environmental responsibility:
[axis.com/environmental-responsibility](https://www.axis.com/environmental-responsibility)