

SilverNet MAX 1000-PCP Network bridge 1000 Mbit/s White

Brand : SilverNet

Product code: SIL MAX 1000-PCP

Product name : MAX 1000-PCP




- Point-to-Point Outdoor Wireless Bridge Up to 20KM
- Integrated 18dBi Antenna
- Designed for Outdoor applications
- SNMP
- AES Encryption up to 256bit
- MIMO with spatial multiplexing
- DFS (Dynamic Frequency Selection)
- TPC (transmit Power Control)
- PoE 802.3af
- WEB Management

1000Mbps, 18dBi, PoE, MIMO, DFS, 1G LAN, 370x370x90 mm, pre-configured

SilverNet MAX 1000-PCP. Maximum data transfer rate: 1000 Mbit/s, Maximum transfer distance: 20000 m, Supported data transfer rates: 240, 500, 1000Mbps. Antenna design: Internal, Antenna gain level (max): 18 dBi, Pan/tilt-axis range: 180°. Wi-Fi band: Single-band (5 GHz), Top Wi-Fi standard: Wi-Fi 5 (802.11ac), WLAN data transfer rate (max): 1300 Mbit/s. Ethernet LAN interface type: Gigabit Ethernet, Ethernet LAN data rates: 10,100,1000 Mbit/s, Networking standards: IEEE 802.11a, IEEE 802.11ac, IEEE 802.11i, IEEE 802.11n, IEEE 802.1Q, IEEE 802.1x, IEEE 802.3af. Connectivity technology: Wired & Wireless

| Data transmission | | Features | |
|-------------------------------|---|------------------------------------|---|
| Maximum data transfer rate * | 1000 Mbit/s | Surge protection | ✓ |
| Maximum transfer distance | 20000 m | Quality of Service (QoS) support | ✓ |
| Supported data transfer rates | 240, 500, 1000Mbps | Wi-Fi Multimedia (WMM)/(WME) | ✓ |
| Antenna | | Network Time Protocol (NTP) client | ✓ |
| Antenna design | Internal | Mean time between failures (MTBF) | 60000 h |
| Antenna gain level (max) | 18 dBi | System requirements | |
| Pan/tilt-axis range | 180° | Minimum system requirements | Internet Explorer, Google Chrome, Mozilla Firefox |
| Antennas quantity | 1 | Compatible operating systems | Microsoft Windows, Mac OS, Linux Distributions |
| Wireless LAN features | | Power | |
| Wi-Fi | ✓ | Power source type | DC, PoE |
| Wi-Fi band | Single-band (5 GHz) | AC input voltage | 100 - 240 V |
| Top Wi-Fi standard | Wi-Fi 5 (802.11ac) | Power supply | 15.4 W |
| WLAN data transfer rate (max) | 1300 Mbit/s | DC input voltage | 24-48/48-56 V |
| Frequency band | 5.1 - 5.8 GHz | Power consumption (typical) | 6 W |
| Transmission gain | 0 - 23 dB | Power consumption (max) | 16 W |
| Signal strength | -40 dBm | Power over Ethernet (PoE) | ✓ |
| Channels quantity | 25 channels | Power over Ethernet (PoE) voltage | 48 V |
| Modulation | 16-QAM, 64-QAM, 256-QAM, BPSK, QPSK | Power plug type | Type G |
| Receiver sensitivity | -82dBm@54Mbps, -74dBm@300Mbps, -68dBm@1.3Gbps | Operational conditions | |
| Output power (dBm) | 26 | Operating temperature (T-T) | -20 - 70 °C |
| Indoor range | 20000m | Operating temperature (T-T) | -4 - 158 °F |
| Outdoor range | 20000m | Operating relative humidity (H-H) | 0 - 95% |
| Network | | Storage temperature (T-T) | -40 - 90 °C |
| Ethernet LAN | ✓ | Storage relative humidity (H-H) | 0 - 95% |
| Ethernet LAN interface type | Gigabit Ethernet | Certificates | |
| Ethernet LAN data rates | 10,100,1000 Mbit/s | Certification | CE, FCC |
| Networking standards | IEEE 802.11a, IEEE 802.11ac, IEEE 802.11i, IEEE 802.11n, IEEE 802.1Q, IEEE 802.1x, IEEE 802.3af | Weight & dimensions | |
| | | Antenna diameter | 51 cm |

| | | | |
|---|---|--------------------------------|----------------|
| Network | | Weight & dimensions | |
| Cabling technology | 10/100/1000Base-T(X) | Width | 370 mm |
| Full duplex | ✓ | Depth | 370 mm |
| Auto MDI/MDI-X | ✓ | Height | 90 mm |
| Static IP | ✓ | Weight | 2.5 kg |
| Dynamic IP | ✓ | Packaging content | |
| Ports & interfaces | | Grounding | ✓ |
| Connectivity technology | Wired & Wireless | PoE+ Injector(s) | ✓ |
| Ethernet LAN (RJ-45) ports | 1 | Mounting bracket(s) included | ✓ |
| Security | | Power supply included | ✓ |
| Security algorithms | 256-bit AES, 802.1x RADIUS, SNMPv2, SSH | Antenna included | ✓ |
| MAC address filtering | ✓ | Quick installation guide | ✓ |
| Authentication method | WPA2 AES | Packaging data | |
| Management features | | Package width | 445 mm |
| Management protocols | SNMP V2 | Package depth | 305 mm |
| Web-based management | ✓ | Package height | 460 mm |
| DHCP client | ✓ | Package weight | 9.37 kg |
| Features | | Package type | Box |
| Product type * | Network bridge | Quantity per pack | 2 pc(s) |
| Product colour | White | Logistics data | |
| Remote control function | ✓ | UK Trade Tariff code | 85176200 |
| LED indicators | LAN, Signal strength | Country of origin | United Kingdom |
| Automatic Transmit Power Control (ATPC) | ✓ | | |
| Wall mountable | ✓ | | |
| Reset button | ✓ | | |
| International Protection (IP) code | IP67 | | |

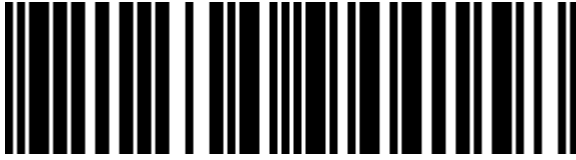

5712505944158



5060693980190

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.