



Lindy 10 Port USB 3.0 Hub with On/Off Switches

Brand : Lindy

Product code: 43370

Product name : 10 Port USB 3.0 Hub with On/Off Switches




- Allows up to 10 USB 3.0 devices to be connected to a single port
- On/Off switch on each port allows users to manage power consumption of the connected devices
- SuperSpeed transfer rates up to 5Gbps, backwards compatible with USB 2.0 / 1.1
- 36W of power available for devices with large power requirements
- 2 year warranty

10 Port USB 3.0 Hub with On/Off Switches

Lindy 10 Port USB 3.0 Hub with On/Off Switches. Host interface: USB 3.2 Gen 1 (3.1 Gen 1) Type-B, Hub interfaces: USB 3.2 Gen 1 (3.1 Gen 1) Type-A. Data transfer rate: 5000 Mbit/s, Product colour: Black, Housing material: Acrylonitrile butadiene styrene (ABS), Aluminium. Power supply type: AC, Input voltage: 12 V, Input current: 3 A. Width: 169.6 mm, Depth: 46.2 mm, Height: 25 mm. Quantity per pack: 1 pc(s), Package width: 205 mm, Package depth: 132 mm



| Ports & interfaces | | Packaging data | |
|---|--|-----------------------------------|--|
| Host interface * | USB 3.2 Gen 1 (3.1 Gen 1) Type-B | Quantity per pack | 1 pc(s) |
| Hub interfaces * | USB 3.2 Gen 1 (3.1 Gen 1) Type-A | Package width | 205 mm |
| USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity | 10 | Package depth | 132 mm |
| Ports quantity * | 11 | Package height | 52 mm |
| DC-in jack | ✓ | Package weight | 600 g |
| | | Package type | Carton |
| Features | | Packaging content | |
| Data transfer rate * | 5000 Mbit/s | AC adapter included | ✓ |
| Product colour | Black | Included power plug types | AU, EU, UK, US |
| Housing material | Acrylonitrile butadiene styrene (ABS), Aluminium | Cables included | USB Type-A to USB Type-B |
| USB Power Delivery (USB PD) | ✗ | Manual | ✓ |
| Cable length | 1 m | Operational conditions | |
| Certification | CE, FCC, RoHS & REACH, CP65 | Operating temperature (T-T) | -5 - 56 °C |
| Power | | Operating temperature (T-T) | 23 - 133 °F |
| Power supply type | AC | Storage temperature (T-T) | -20 - 60 °C |
| Input voltage | 12 V | Operating relative humidity (H-H) | 5 - 95% |
| Input current | 3 A | Technical details | |
| Weight & dimensions | | Compliance certificates | CE, Federal Communications Commission (FCC), REACH, RoHS |
| Width | 169.6 mm | Other features | |
| Depth | 46.2 mm | Chipset | RTS5411 |
| Height | 25 mm | | |
| Weight | 42 g | | |

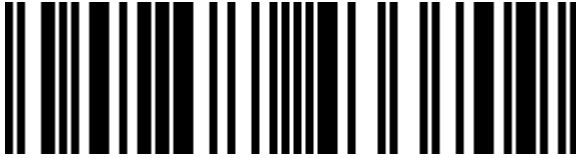

4002888433709

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.