Lindy DST-Pro Universal, USB-C and Type A Hybrid Laptop Docking Station - 4K HDMI, 2x4K (DP or HDMI)

Brand : Lindy

Product code: 43366

Product name : DST-Pro Universal, USB-C and Type A Hybrid Laptop Docking Station - 4K HDMI, 2x4K (DP or HDMI)

- Connects up to three 4K displays (DisplayPort and HDMI)* and many peripherals over a single cable
- Supports all common operating systems and host computers with USB Type A and C interface
- Integrated 5 port USB Type A and Type C Hub (2x 10 Gbps, 3x 5Gbps)
- Supports Power Delivery 3.0 up to 100W (requires USB Type C/TB3/4 host connection)
- 2-year warranty

DST-Pro Universal, USB-C and Type A Hybrid Laptop Docking Station - 4K HDMI, 2x4K (DP or HDMI)
Lindy DST-Pro Universal, USB-C and Type A Hybrid Laptop Docking Station - 4K HDMI, 2x4K (DP or HDMI).
Connectivity technology: Docking, Host interface: USB 3.2 Gen 2 (3.1 Gen 2) Type-C. Product colour: Black, Certification: CE, FCC, RoHS & REACH, California Proposition 65. Power source type: DC, Power connector: USB Type-C, AC input voltage: 24 V. Width: 85 mm, Depth: 30 mm, Height: 190 mm. Quantity per pack: 1 pc(s), Package width: 205 mm, Package depth: 50 mm

Ports & interfaces

Connectivity technology *	Docking
Host interface *	USB 3.2 Gen 2 (3.1 Gen 2) Type-C
HDMI ports quantity *	3
DisplayPorts quantity	2
Microphone in *	✔
Headphone outputs *	1

Network

Ethernet LAN *	✔
Ethernet LAN (RJ-45) ports	1

Performance

Product colour *	Black
Certification	CE, FCC, RoHS & REACH, California Proposition 65

Power

Power source type	DC
Power connector	USB Type-C
AC input voltage	24 V
Input current	5 A
Power consumption (max)	30 W

Operational conditions

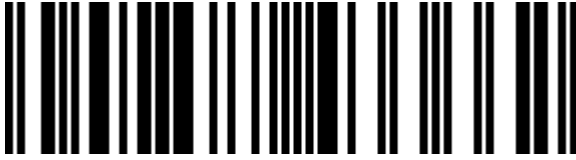|	
Operating temperature (T-T)	-20 - 40 °C
Storage temperature (T-T)	-40 - 80 °C
Operating relative humidity (H-H)	5 - 90%

Weight & dimensions

Width	85 mm
Depth	30 mm
Height	190 mm
Weight	396 g

Packaging data

Quantity per pack	1 pc(s)
Package width	205 mm
Package depth	50 mm
Package height	323 mm
Package weight	1.7 kg

Technical details

Warranty period	2 year(s)
Compliance certificates	CE, Federal Communications Commission (FCC), REACH, RoHS

4002888433662