



ATEN CS1642A KVM-kytkin Telineasennus musta, Hopea

Tuotemerkki : ATEN

Tuotekoodi: CS1642A-AT-G

Tuotteen nimi : CS1642A

ATEN CS1642A. Näppäimistöportin liitin: USB, Hiiriportin liitin: USB, Videoportin tyyppi: DVI-I.
Enimmäiserottelutarkkuus: 2560 x 1600 pikseliä, Videokaistanleveys: 60 Hz, Skannausväli: 1,99 s.
Tuotteen väri: musta, Hopea, Telineen kapasiteetti: 1U, Kotelon materiaali: Metalli, Muovi. Voimanlähde:
DC, Tulojännite: 5.3 V, Virrankulutus: 10,6 W. Vaatimustenmukaisuustodistukset: RoHS



Ports & interfaces		System requirements	
Number of computers controlled *	2	Linux operating systems supported	✓
Keyboard port type *	USB	Mac operating systems supported	✓
Mouse port type *	USB	Other operating systems supported	✓
Video port type *	DVI-I		
DVI-I ports quantity	6		
Console ports *	3.5mm headphone, 3.5mm mic, DVI-I, USB A		
Console USB ports quantity	2		
USB 2.0 Type-A hub ports quantity	2		
Audio connections	✓		
Headphone outputs	2		
Number of microphone inputs	1		
DC-in jack	✓		
Network		Sustainability	
Ethernet LAN	✓	Compliance certificates	RoHS
Ethernet LAN (RJ-45) ports	1		
Performance		Operational conditions	
Maximum resolution *	2560 x 1600 pixels	Operating temperature (T-T)	0 - 50 °C
Video bandwidth	60 Hz	Storage temperature (T-T)	-20 - 60 °C
Scan interval	1,99 s	Operating relative humidity (H-H)	0 - 80%
Design		Weight & dimensions	
Rack mounting *	✓	Width	262.3 mm
Rack capacity	1U	Depth	76.8 mm
Product colour *	Black, Silver	Height	44 mm
Housing material	Metal, Plastic	Weight	1.72 kg
LED indicators	✓		
Push button	✓		
Hot keys	✓		
Display		Packaging data	
Built-in display *	✗	Package width	98 mm
		Package depth	325 mm
		Package height	210 mm
		Package weight	2 kg
Power		Packaging content	
Power source	DC	Cables included	DVI, KVM
		Quick installation guide	✓
		Manual	✓
		AC adapter included	✓
		Logistics data	
		Master (outer) case net weight	8.6 kg
		Harmonized System (HS) code	85176200
		Master (outer) case width	342 mm
		Master (outer) case length	512 mm
		Master (outer) case height	232 mm
		Master (outer) case gross weight	10.9 kg

Power


Input voltage	5.3 V
Power consumption (typical)	10.6 W

Logistics data

Products per master (outer) case	5 pc(s)
----------------------------------	---------

System requirements

Windows operating systems supported	✓
-------------------------------------	---

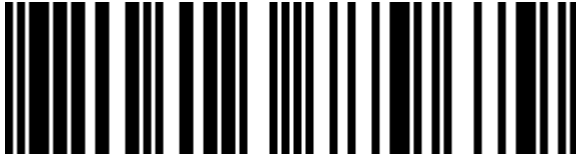

4710423779679

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 19-DEC-2024. Prints or copies of Information are only valid on the printed Publication date