



SC/UPC Pigtail Singlemode 2m OS2 9/125 PVC EASY STRIP - GRADE C

Item no.: LV0231397

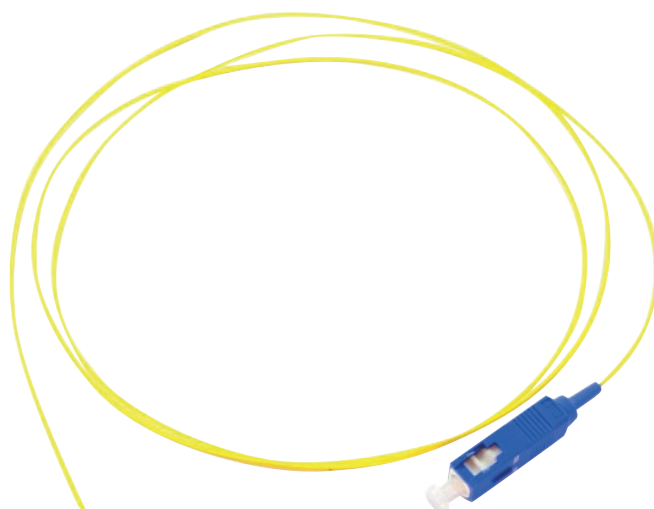

PRODUCT OVERVIEW

Designed for Data Centers, Industry and Computer Centers. Used for splicing fibre optical cables. Comes with ceramic zirconia ferrule. Used in telecommunication and data communication installations in high speed network.

SPECIFICATIONS

Industry standards compliance	ISO 9001, RoHS, UL, GR-326-Core, Telcordia and IEC compatible standards
Fiber	OS2 G652D
Tests	IHT, IEC 61755, IEC61300
Connector	SC
Polishing	UPC
Max loss	0.30 db
Return loss	50 db
Grade	C
Jacket	Ø900 µm
Length	2 m

