


LC/UPC Pigtail Singlemode 2m OS2 9/125 PVC EASY STRIP - GRADE C

Item no.: LV0231405

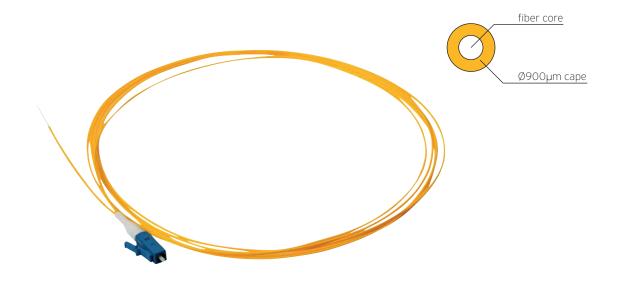

PRODUCT OVERVIEW

Designed for Data Centers, Industry and Computer Centers.
Used for splicing fibre optical cables. Comes with ceramic zirconia ferrule. Used in telecommunication and data communication installations in high speed network.

SPECIFICATIONS

| Industry standards compliance | ISO 9001, RoHS, UL, GR-326-Core, Telcordia and IEC compatible standards |
|----------------------------------|---|
| Fiber | OS2 G652D |
| Tests | IHT. IEC 61755, IEC61300 |
| Connector | LC |
| Polishing | UPC |
| Max loss | 0.30 db |
| Return loss | 50 db |
| Grade | С |
| Jacket | Ø900 µm |
| Length | 2 m |

