



Lenovo 4XB7A17127 internal solid state drive 1.92 TB 2.5" Serial ATA III 3D TLC



Brand : Lenovo

Product code: 4XB7A17127

Product name : 4XB7A17127


ThinkSystem 2.5" S4620 1.92TB Mixed Use SATA 6Gb HS SSD

[Lenovo 4XB7A17127 internal solid state drive 1.92 TB 2.5" Serial ATA III 3D TLC:](#)

The ThinkSystem S4520 Mixed Use SATA SSDs use 144-layer Intel 3D NAND TLC Flash Memory technology with a 6Gbps SATA interface to provide an affordable solution with industry leading performance.

This product guide provides essential presales information to understand the S4620 SSDs, their key features and specifications, components and options, and configuration guidelines. This guide is intended for technical specialists, sales specialists, sales engineers, IT architects, and other IT professionals who want to learn more about S4620 SSDs and consider their use in IT solutions. Lenovo 4XB7A17127. SSD capacity: 1.92 TB, SSD form factor: 2.5", Read speed: 550 MB/s, Write speed: 510 MB/s, Component for: Server/workstation

Features		Features	
SSD capacity *	1.92 TB	Certification	FCC Title 47, Part 15B, Class B
SSD form factor *	2.5"		EN-55035:2017 EN-55022:2006
Interface *	Serial ATA III		EN-55032:2012 Low Voltage
Memory type *	3D TLC		Directive (LVD) 2014/35/EU EMC
Component for *	Server/workstation		Directive 2014/30/EU RoHS
Read speed	550 MB/s		Directive 2011/65/EU WEEE
Write speed	510 MB/s		Directive 2012/19/EU UL 60950-1,
Random read (4KB)	91000 IOPS		2nd Edition, 2014-10-14 CSA C22.2
Random write (4KB)	53000 IOPS		No. 60950-1-07, 2nd Edition,
Mean time between failures (MTBF)	2000000 h		2014-010 UL/CSA 62368-1, 2nd
		Edition AS/NZ CISPR 32:2015 AS/NZ	
		CISPR 22:2009 +A1:2010 Taiwan	
		BSMI EMC standard CNS 13438	
		Korea KCC Article 11.1 Morocco	
		Decree # 2574-14 (EMC) Canada	
		ICES-003 Japan VCCI China EFUP	
Power			
Power consumption (max)		3.3 W	
Weight & dimensions			
Width		174 mm	
Depth		133 mm	
Height		63 mm	
Weight		434 g	
Operational conditions			
Operating temperature (T-T)		0 - 70 °C	
Operating relative humidity (H-H)		5 - 95%	
Maximum operating altitude		3050 m	
Logistics data			
Harmonized System (HS) code		84717070	

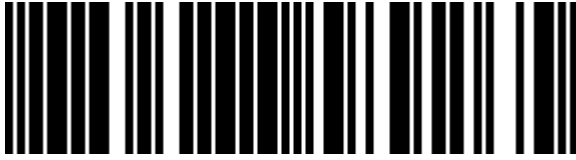

0889488589265



889488589265

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.