

LEGEND 900 PCIe Gen4 x4 M.2 2280 SSD

# Instant Powerful Performance



## LEGEND 900 PCIe Gen4 x4 M.2 2280 Solid State Drive


The LEGEND 900 solid-state drive is the foremost choice for creators who want to obtain their first high-end PCIe 4.0 SSD. With sequential read/write speeds of 7,000/5,400MB per second, high-capacity storage of 2TB, and compatible with the latest Intel and AMD platforms, the LEGEND 900 is a powerful and cost-effective solution.

### Features

- PCIe Gen4 x4 transmission interface
- Compliant with NVMe 1.4
- R/W speed up to 7,000/5400 MB/s
- Work with PS5
- Read speed up to 6,200MB/s for PS5
- Up to 2TB
- SLC caching
- HMB (Host Memory Buffer)
- Advanced hardware LDPC ECC Technology
- Free software: SSD Toolbox

### Ordering Information

Capacity	Model Number	EAN Code
512GB	SLEG-900-512GCS	4711085944146
1TB	SLEG-900-1TCS	4711085944153
2TB	SLEG-900-2TCS	4711085944160

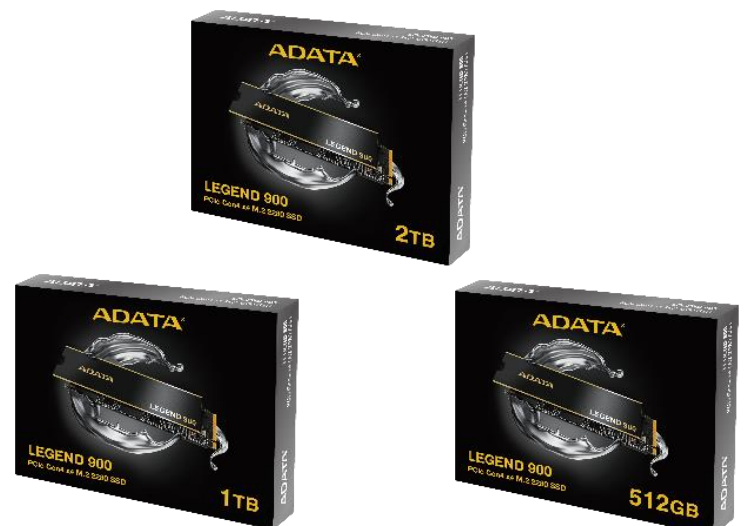

# Specifications

- Capacity: 512GB / 1TB / 2TB
- Form Factor: M.2 2280
- Interface: PCIe Gen4 x4
- NAND Flash: 3D NAND
- Sequential read/write (Max.):  
Read 7,000MB/s (PC/Laptop), 6,200MB/s (PS5) ;  
Write 5,400MB/s
- Operating Temperature: 0°C-70°C
- Storage Temperature: -40°C-85°C
- Shock Resistance: 1500G/0.5ms
- MTBF: 1,500,000 hours
- Dimensions (L x W x H):  
80 x 22 x 3.35mm / 3.15 x 0.86 x 0.13inch (with heat sink)  
80 x 22 x 2.05mm / 3.15 x 0.86 x 0.08inch (without heat sink)
- Weight:  
10.6g / 0.37oz (with heat sink)  
6.5g / 0.23oz (without heat sink)
- Terabytes Written (TBW)(Max. capacity): 2,000
- Warranty: 5-year limited warranty
- Certifications: CE, FCC, BSMI, KC, EAC, RCM, morocco, UKCA, RoHS

# Performance


Capacity	Sequential Performance (Up to) <sup>1</sup>		PS5 (Up to)	TBW <sup>3</sup>
	Read (MB/s)	Write (MB/s)	Seq. Read (MB/s)	
512GB	6,200	2,300	6,200	300TB
1TB	7,000	4,700	6,200	600TB
2TB	7,000	5,400	6,200	1,200TB

<sup>1</sup>Performance may vary based on SSD capacity, hardware test platform, test software, operating system, and other system variables


<sup>2</sup>The value is the minimum amount of terabyte written that could be reached.

# Schematics

<With heatsink>

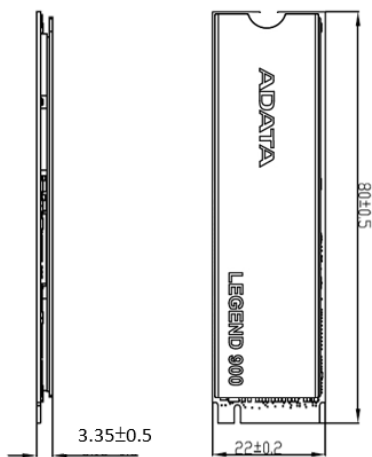

<Without heatsink>

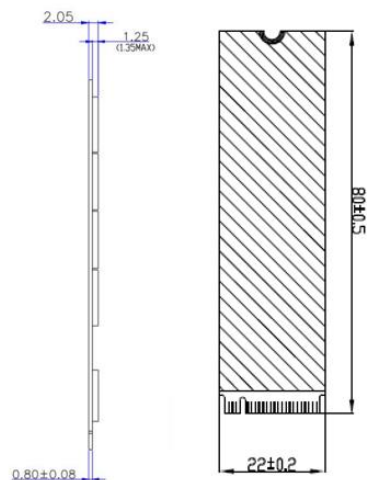

ADATA Technology Co., Ltd  
 2F, No.258 Liancheng Rd.,  
 Zhonghe Dist., New Taipei City 235, Taiwan  
 T :+886-2-8228-0886  
 F :+886-2-8228-0887  
 E :adata@adata.com

