APC

APC GVSUPS15KB4HS uninterruptible power supply (UPS) Double-conversion (Online) 15 kVA 15000 W

Brand : APC   **Product code:** GVSUPS15KB4HS

Product name : GVSUPS15KB4HS

15 kVA, 15 kW, 40/70Hz, 55 dB, 521x847x1485mm, 330kg

APC GVSUPS15KB4HS uninterruptible power supply (UPS) Double-conversion (Online) 15 kVA 15000 W:
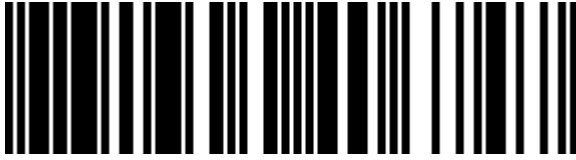
GVSUPS15KB4HS Features

- Galaxy VS UPS 15kW 400V, 1 internal 9Ah smart modular battery string, expandable to 4, Start-up 5x8
- Highly efficient, easy-to-deploy 15kW, 400V 3-phase UPS that brings best-in-class power protection and low total cost of ownership to edge, small and medium data centers, as well as to critical infrastructure in commercial and industrial applications. Includes 5x8 start-up service and 1 smart high-capacity modular battery string, expandable to 4 strings for extended runtime. Runtime charts available in the Documents tab.
- Includes: Battery modules ship installed, Dust filter, EcoStruxure Ready ((UPS)), Installation guide, Integrated network management, Power modules ship installed, Start-Up Service

Features

UPS topology *	Double-conversion (Online)
Output power capacity *	15 kVA
Output power *	15000 W
Waveform *	Sine
Input operation voltage (min) *	340 V
Input operation voltage (max) *	460 V
Input frequency *	40/70 Hz
Output operation voltage (min)	380 V
Output operation voltage (max)	415 V
Output frequency	50/60 Hz
Maximum current	27 A
Number of input phases	3
Number of output phases	3
Input power factor	0.99
Crest factor	2.5:1
ECO mode	✔
Output voltage Total Harmonic Distortion (THD)	3%
Input current Total Harmonic Distortion (THD)	3%
Noise level	55 dB
Power protection features	Overload, Short circuit
Audible alarm(s)	✔

Design

Form factor *	Tower
Product colour *	White
Display type	LCD
International Protection (IP) code	IP20

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-15 - 40 °C
Operating relative humidity (H-H)	0 - 95%
Storage relative humidity (H-H)	0 - 95%
Operating altitude	0 - 1000 m
Non-operating altitude	0 - 3000 m

Certificates

Certification	CSA C22.2 NO. 107.3, EN/IEC 62040-1, EN/IEC 62040-2, EN/IEC 62040-3, IEC 60721-4-2 Level 2M2, UL 1778 5th edition

Packaging content

Quick installation guide	✔

Weight & dimensions

Width	521 mm
Depth	847 mm
Height	1485 mm
Weight	330 kg

Ports & interfaces		Packaging data	
AC outlet types	Hard Wire 3-wire (1PH + N + G), Hard Wire 4-wire (3PH + G)	Package width	640 mm
		Package depth	990 mm
SmartSlot	✔	Package height	1680 mm
Battery		Package weight	360 kg
Battery technology	Sealed Lead Acid (VRLA)	**Logistics data**	
Battery voltage	480 V	Harmonized System (HS) code	85078000

0731304406747

731304406747

5054444446103