



Lenovo ThinkSystem SR650 V2 palvelin 0 GB Teline (2U) Intel® Xeon Silver 4309Y 2,8 GHz 32 GB DDR4-SDRAM 1100 W



Tuotemerkki : Lenovo


Tuoteperhe: ThinkSystem

Tuotekoodi: 7Z73A0AAEA

Tuotteen nimi : SR650 V2

Lenovo ThinkSystem SR650 V2. Suoritinperhe: Intel® Xeon Silver, Prosessorin taajuus: 2,8 GHz, Prosessorimalli: 4309Y. Sisäinen muisti: 32 GB, Sisäisen muistin tyyppi: DDR4-SDRAM, Muistin sijoittelu (paikat x koko): 1 x 32 GB. Kokonaistallennuskapasiteetti: 0 GB. Ethernet LAN, Kaapelitekniikka: 10/100/1000Base-T(X). Virtalähde: 1100 W, Vikasietoisen virtalähteen tuki (RPS). Alustatyyppi: Teline (2U)

Processor		Ports & interfaces	
Processor manufacturer *	Intel	USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	4
Processor family *	Intel Xeon Silver	VGA (D-Sub) ports quantity	1
Processor model *	4309Y	Expansion slots	
Processor frequency *	2.8 GHz	PCI Express x8 slots	2
Processor boost frequency	3.6 GHz	PCI Express x16 slots	1
Processor cache	12 MB	Design	
Number of processors installed	1	Chassis type *	Rack (2U)
Maximum number of SMP processors	2	Product colour	Black, Stainless steel
Memory		Rack mounting	✓
Internal memory *	32 GB	Redundant fans support	✓
Internal memory type *	DDR4-SDRAM	Performance	
Memory slots	32x DIMM	Performance management	XClarity Standard
ECC	✓	Trusted Platform Module (TPM)	✓
Memory clock speed	3200 MHz	Trusted Platform Module (TPM) version	2.0
Memory layout (slots x size)	1 x 32 GB	Software	
Storage		Compatible operating systems *	Microsoft Windows Server, Red Hat Enterprise Linux, SUSE Linux Enterprise Server, VMware ESXi
Total storage capacity *	0 GB	Power	
RAID support *	✓	Redundant power supply (RPS) support *	✓
RAID levels	0, 1, 5, 6, 10, 50, 60	Power supply *	1100 W
Supported RAID controllers	930-8i 2GB	Number of redundant power supplies supported	2
Optical drive type *	✗	Number of redundant power supplies installed	1
Internal drive bays	8	Power supply input voltage	220 V
Graphics		Weight & dimensions	
Maximum graphics card memory	16 MB	Width	445 mm
Network		Depth	764 mm
Wake-on-LAN ready	✓	Height	87 mm
Ethernet LAN	✓		
Cabling technology	10/100/1000Base-T(X)		
Ethernet interface type	Gigabit Ethernet		
Ports & interfaces			
USB 2.0 ports quantity	1		

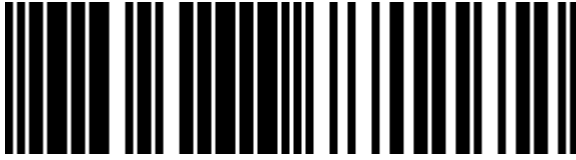

0889488771172



889488771172

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.