

ASUS TUF GAMING 1200W Gold virtalähdeyksikkö 20+4 pin ATX ATX musta

Tuotemerkki : ASUS

Tuotekoodi: 90YE00S0-B0NA00

Tuotteen nimi : TUF GAMING 1200W Gold

ASUS TUF GAMING 1200W Gold. Kokonaisteho: 1200 W, AC-syöttöjännite: 100 - 240 V, Yhdistetty teho (+3.3V): 130 W. Emolevyn virtaliitin: 20+4 pin ATX, Emolevyn virtapiuhan pituus: 61 cm, SATA-virtakaapelin pituus: 120,400 mm. Tarkoitus: PC, Virransyöttöyksikön mitat: ATX, 80 PLUS certification: 80 PLUS Gold. Tuotteen väri: musta, Jäähdytyksen tyyppi: Aktiivinen, Tuulettimen halkaisija: 13,5 cm. Sisältää johdot: AC, Prosessori (CPU), PCIe, Peripheral (Molex), SATA



Power		Ports & interfaces	
Total power *	1200 W	CPU power cable length	65 cm
AC input voltage *	100 - 240 V	ATX power connector (20+4 pin)	✓
Combined power (+3.3V)	130 W	Cabling type	Fully-Modular
Combined power (+12V)	1188 W	Performance	
Combined power (+5V)	130 W	80 PLUS certification *	80 PLUS Gold
Combined power (-12V)	9.6 W	Purpose *	PC
Combined power (+5Vsb)	15 W	Power supply unit (PSU) form factor *	ATX
Max output current (+3.3V)	25 A	ATX version	3.0
Max output current (+12V)	99 A	Design	
Max output current (+5V)	25 A	Product colour	Black
Max output current (-12V)	0.8 A	Cooling type	Active
Max output current (+5Vsb)	3 A	Fan diameter	13.5 cm
Efficiency	92%	Number of fans	1 fan(s)
Power protection features	Over power, Over voltage, Overcharge, Overheating, Short circuit, Under power, Under voltage	On/off switch	✓
Ports & interfaces		Packaging content	
Motherboard power connector *	20+4 pin ATX	Cables included	AC, CPU, PCIe, Peripheral (Molex), SATA
Motherboard power cable length	61 cm	Cable tie(s) included	✓
Number of SATA power connectors	5	Weight & dimensions	
SATA power cable length	120,400 mm	Width	150 mm
Peripheral (Molex) power connectors (4-pin) *	4	Depth	150 mm
Peripheral (Molex) power cable length	150,400 mm	Height	86 mm
PCI Express power connectors (8-pin)	3	Weight	2.66 kg
PCI Express power connectors (16-pin)	2	Packaging data	
PCI Express power cable length	67.5 cm	Package width	310 mm
		Package depth	200 mm

Ports & interfaces

CPU power connector (4+4 pin) ✓

Packaging data

Package height 108 mm

Package weight 3.35 kg


Package type Box

Technical details

Sustainability compliance ✓

Warranty period 10 year(s)

Compliance certificates RoHS

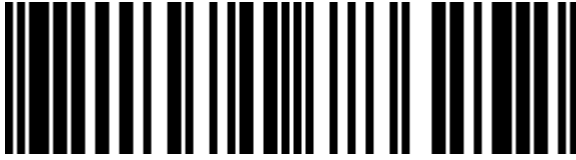

4711081786252

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 22-DEC-2024. Prints or copies of Information are only valid on the printed Publication date