


Item No. 62961

Delock Converter M.2 Key B+M male > 2 x SATA 7 pin male with RAID

Description

This converter by Delock expands the system by two SATA ports. When using more than one SATA port, there is the possibility to use different RAID modes.

M.2
RAID
function

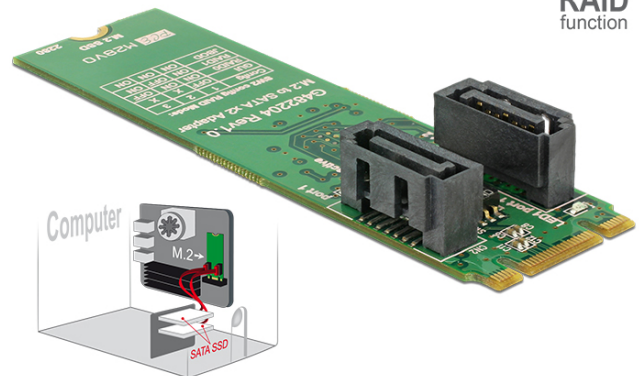

Specification

- Connectors:
1 x 59 pin M.2 key B+M male >
2 x SATA 6 Gb/s 7 pin plug
- Chipset: Asmedia ASM1092R
- Interface: SATA
- Form factor: M.2 2280
- Suitable for M.2 slot with key M or B based on SATA
- Data transfer rate up to 6 Gb/s
- Supports RAID 0, 1, JBOD
- Supports HDD and SSD
- 1 x button for RAID setting
- 1 x DIP switch for RAID mode
- Dimensions (LxWxH): ca. 80 x 22 x 11 mm

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 3.3.0 / Kernel 4.9.4
- One free M.2 key M or key B slot

Package content

- Converter
- User manual

Additional Information

EAN: 4043619629619

Country of origin: Taiwan, Republic of China

Package: Retail Box



Images



| General | |
|-----------------------------|--|
| Form factor: | M.2 2280 (2260) |
| Supported operating system: | Linux ex Kernel 4.9.4 Linux ex Kernel 3.3 Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit |
| Slot: | SATA |
| Interface | |
| connector 1: | 1 x 59 pin M.2 key B+M male |
| connector 2: | 2 x SATA 6 Gb/s 7 pin plug |
| Technical characteristics | |
| Chipset: | Asmedia ASM1092R |
| Data transfer rate: | 6 Gb/s |
| RAID function: | JBOD 0 1 |
| Physical characteristics | |
| Length: | 80 mm |
| Width: | 22 mm |
| Height: | 11 mm |