

Unshielded flip jack Cat6 keystone

Item no.: LVN128078



PRODUCT OVERVIEW

This unshielded Cat6 Keystone Jack for patch panels and other data installations allows for multiple cable entry directions to be accommodated when this jack is mounted in a standard depth back box. This permits many mounting options including flush shutters at the outlet as well as more common angled shutter used with keystone jacks.

Component Compliant Manufacture.

Easy to install without need for special tools.


Meet all requirements specified in connecting hardware requirement of ANSI/TIA-568-C.2 / ISO11801 Cat.6


SPECIFICATIONS

Category	6 Unshielded
Туре	Keystone
Colour	White front/black housing
Packaging	1pcs
Frequency	250Mhz
Protocol	1Gbps Ethernet
POE+	30 Watt





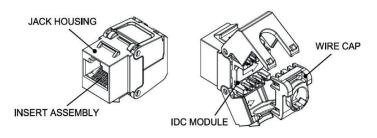



ITEM	PART NAME	QTY
4	Wire cap	1
3	ldc module	1
2	Insert assembly	1
1	Jack housing	1

MECHANICAL

Insertion / Extraction Life	750 Cycles Minimum IDC
Wire Gauge	22 - 24 AWG

ELECTRICAL

Electrical Insulation	500 MO
Resistance	min. @ 100V d.c
Dielectric Withstanding Voltage	1000V d.c. or a.c. Peak Contact to Contact @ 60Hz for 1 minute

PHYSICAL

Housing	High-Impact, Flame-Retardant Plastic, UL 94V-0
Spring Wire	Phosphor Bronze Alloy Plated With 50 micro-inch of Gold
IDC	Phosphor Bronze Alloy With 100 micro-inch 100% Sn Alloy

Unshielded flip jack Cat6 keystone