



Lenovo 4Y37A72483 RAID controller PCI Express x8 3.0 12 Gbit/s

Brand : Lenovo

Product code: 4Y37A72483


Product name : 4Y37A72483

ThinkSystem RAID 9350-8i 2GB Flash PCIe 12Gb Adapter


Lenovo 4Y37A72483 RAID controller PCI Express x8 3.0 12 Gbit/s:

The ThinkSystem RAID 9350 family of internal 12 Gbps SAS RAID controllers are high-performance low-cost RAID-on-chip (ROC) adapters that are designed and manufactured by Lenovo. These adapters support all major RAID levels including RAID-6 and RAID-60, and include support for Lenovo management tools.

This product guide provides essential presales information to understand the ThinkSystem RAID 9350-16i and 9350-8i adapters and their key features, specifications, and compatibility. This guide is intended for technical specialists, sales specialists, sales engineers, IT architects, and other IT professionals who want to learn more about the adapters and consider their use in IT solutions. Lenovo 4Y37A72483. Supported storage drive interfaces: SAS, Serial ATA, Host interface: PCI Express x8. RAID levels: 0, 1, 5, 6, 10, 50, 60, Data transfer rate: 12 Gbit/s, Chipset: Microchip Luxor ROC PM8204. Width: 167 mm, Height: 64 mm

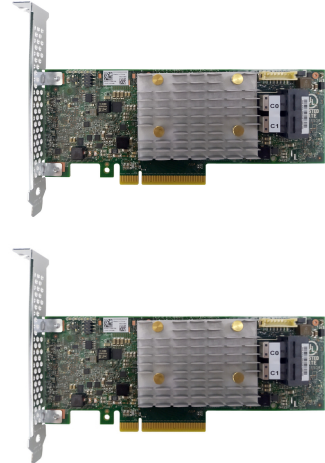

| Ports & interfaces | | Performance | |
|--------------------------------------|----------------------------|-------------------------------------|---|
| Supported storage drive interfaces * | SAS, Serial ATA | Certification | FCC Part 15 Class A Australia/New Zealand (AS/NZS 3548) Canada (ICES-003 Class B) Europe (EN55032/EN55024) Japan VCCI Korea KCC RoHS compliant EN/IEC/UL 60950 USA (FCC 47 CFR part 15 Subpart B class B) |
| Host interface * | PCI Express x8 | | |
| PCI Express slots version | 3.0 | | |
| Performance | | System requirements | |
| RAID levels * | 0, 1, 5, 6, 10, 50, 60 | Windows operating systems supported | ✓ |
| RAID Level Migration | ✓ | Linux operating systems supported | ✓ |
| Data transfer rate | 12 Gbit/s | Operational conditions | |
| SSD support | ✓ | Operating temperature (T-T) | 0 - 55 °C |
| Chipset | Microchip Luxor ROC PM8204 | Operating relative humidity (H-H) | 20 - 80% |
| JBOD function | ✓ | Weight & dimensions | |
| S.M.A.R.T. support | ✓ | Width | 167 mm |
| Number of devices supported | 8 | Height | 64 mm |
| Hot-swap | ✓ | | |

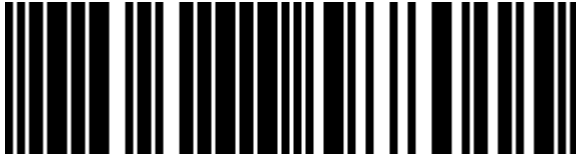

0889488588015



889488588015

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.