



Lenovo 7XC7A05525 network card Internal Fiber 10000 Mbit/s



Brand : Lenovo

Product code: 7XC7A05525

Product name : 7XC7A05525

Intel X710-DA4 4 x 10Gb SFP+ Adapter


[Lenovo 7XC7A05525 network card Internal Fiber 10000 Mbit/s:](#)

The Intel X710 family of 10 Gigabit Ethernet (GbE) server network adapters addresses the demanding needs of the next-generation data center. By providing unmatched features for server and network virtualization, small packet performance, and low power; the data center network is flexible, scalable, and resilient.

The Intel X710 family of 10 Gigabit Ethernet (GbE) server network adapters addresses the demanding needs of the next-generation data center. By providing unmatched features for server and network virtualization, small packet performance, and low power; the data center network is flexible, scalable, and resilient.

The X710 is available in three host connections: a standard PCIe host interface, a Mezzanine LOM (ML2) host interface for ThinkSystem and System x servers, and an AnyFabric host interface for ThinkServer systems (now withdrawn).

Ports & interfaces		System requirements	
Connectivity technology *	Wired	Linux operating systems supported	✓
Host interface *	PCI Express	Operational conditions	
Interface *	Fiber	Operating temperature (T-T)	0 - 55 °C
Fiber ports quantity	4	Storage temperature (T-T)	-20 - 65 °C
Fiber optic connector	SFP+	Operating relative humidity (H-H)	10 - 90%
PCI version	3.0	Storage relative humidity (H-H)	5 - 80%
Network		Weight & dimensions	
Maximum data transfer rate *	10000 Mbit/s	Width	15 mm
Networking standards *	IEEE 802.1Q, IEEE 802.1as, IEEE 802.1p, IEEE 802.3ad, IEEE 802.3ae, IEEE 802.3x	Depth	167 mm
		Height	111 mm
Design		Technical details	
Component for *	Server	Compliance certificates	RoHS
Product colour	Green	Logistics data	
Internal *	✓	Harmonized System (HS) code	85176990
Certification	EN55022 EN55024 EN 61000-3-2 EN 61000-3-3 ICES-003, Issue-004 FCC 47 CFR Part 15 Class A VCCI AS/NZS CISPR 22 / C-tick RRL for KC BSMI UL 94 V-1	Other features	
Compatible products	ST50 (7Y48/7Y50) ST250 (7Y45/7Y46) SR150 (7Y54) SR250 (7Y51/7Y52) x3550 M5 (8869) x3650 M5 (8871)	Minimum operating temperature	0 °C
		Maximum operating temperature	55 °C
System requirements			
Windows operating systems supported	✓		

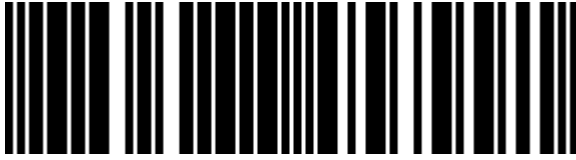

0889488457991



889488457991

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.