



Lenovo 7ZT7A00518 network card Internal Fiber 32000 Mbit/s

Brand : Lenovo

Product code: 7ZT7A00518


Product name : 7ZT7A00518

ThinkSystem QLogic QLE2742 PCIe 32Gb 2-Port SFP+ Fibre Channel Adapter


[Lenovo 7ZT7A00518 network card Internal Fiber 32000 Mbit/s:](#)

The QLogic 32 Gb Fibre Channel (FC) 1-port and 2-port Host Bus Adapters (HBAs) are Generation 6 (Gen 6) FC adapters for Lenovo ThinkSystem servers. These adapters are based on Cavium technology and offer industry leading native FC performance with extremely low CPU usage with full hardware offloads. With performance of up to 1.3 million I/O operations per second (IOPS), these adapters can be used to support all-flash arrays (AFAs) -- Fibre Channel storage systems comprised completely of high-speed solid-state drives.

Powerful management tools automate and simplify SAN provisioning to help reduce cost and complexity, while the unmatched 32 Gbps performance eliminates potential I/O bottlenecks in today's powerful multiprocessor, multicore servers.



Ports & interfaces		System requirements	
Connectivity technology *	Wired	Compatible operating systems	Microsoft Windows Server 2012 R2
Host interface *	PCI Express		Microsoft Windows Server 2016 Red Hat Enterprise Linux 6 Server x64
Interface *	Fiber		Edition Red Hat Enterprise Linux 7
Fiber ports quantity	1		SUSE Linux Enterprise Server 11 for
Fiber optic connector	SFP+		AMD64/EM64T SUSE Linux Enterprise Server 11 with Xen for
Network			AMD64/EM64T SUSE Linux Enterprise Server 12 SUSE Linux Enterprise Server 12 with XEN
Maximum data transfer rate *	32000 Mbit/s		VMware ESXi 6.5
Design		Operational conditions	
Product colour	Green, Grey	Operating temperature (T-T)	0 - 55 °C
Internal *	✓	Storage temperature (T-T)	-20 - 70 °C
Certification	AS/NZS CISPR22:2009+A1, Class A	Operating relative humidity (H-H)	10 - 95%
	CSA 22.2, No. 60950-1-07 (2nd Edition) EN55022:2010, Class A	Storage relative humidity (H-H)	5 - 95%
	EN55024:2010 EU (CE Mark) FCC Rules, Part 15, Class A Industry Canada, ICES-003, Class A Japan VCCI, Class A Korea KC-RRA, Class A TUV	Weight & dimensions	
	EN60950-1:2006+A11+A12 (2nd Edition) Taiwan BSMI, Class A UL60950-1 (2nd Edition)	Width	69 mm
		Depth	168 mm
		Packaging data	
		Quantity	1
		Logistics data	
		Harmonized System (HS) code	85176990

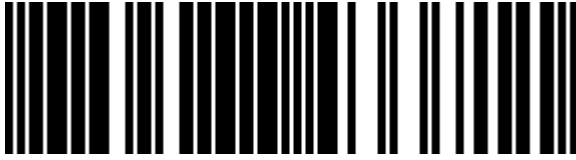

0889488433711



889488433711

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.