

Epson Coated Paper 95, 914 mm x 45 m

Tuotemerkki : Epson

Tuotekoodi: C13S045285

Tuotteen nimi : Coated Paper 95, 914 mm x 45 m

Coated Paper 95, 914 mm x 45 m


[Epson Coated Paper 95, 914 mm x 45 m:](#)

Tukeva huipputason paperi, joka on suunniteltu erityisesti CAD- ja GIS-luonnostulostukseen mustesuihkutekniikalla väri- ja pigmenttimusteen kanssa, sopii myös grafiikoihin ja ammattiesityksiin. Viivat, suurikontrastiset kuvat ja merkit tulostuvat tarkkoina aina 1 mm:n koosta alkaen. Korkea opasiteetti ja nopeat kuivumisajat tekevät visuaalisen vaikutuksen ja helpottavat vedenkestävyytensä ansiosta tahriintumattomien tulosteiden käsittelyä.

- Huipputason luonnostulostuspaperi CAD- ja GIS- tulostukseen sekä ammattiesityksiin ja grafiikoihin
- Kestää vettä eikä tahriinnu
- Korkea opasiteetti
- Nopeasti kuivuva
- Viivat ja suurikontrastiset kuvat tulostuvat tarkkoina selkein värein
- Voidaan käyttää sekä väri- että pigmenttimusteiden kanssa



Features		Packaging data	
Roll length	45 m	Quantity per pack	1 pc(s)
Roll width	91.4 cm	Package width	110 mm
Size (imperial)	91.4 cm (36")	Package depth	940 mm
Finish type	Matte	Package height	108 mm
Print media weight	95 g/m ²	Package weight	4.4 kg
Paper brightness	98	Other features	
Paper whiteness	145	Compatible products	
Printing material brightness	I*91/a 4/b -15, ISO 98%	Epson Stylus Pro 10600, Stylus Pro 11880, Stylus Pro 9450, Stylus Pro 9500, Stylus Pro 9600, Stylus Pro 9700, Stylus Pro 9880, Stylus Pro 9890, Stylus Pro 9900	
Country of origin	China	Logistics data	
Printing material whiteness	CIE 145%	Products per pallet	42 pc(s)
Technical features	Epson Stylus Pro 10600, Stylus Pro 11880, Stylus Pro 9450, Stylus Pro 9500, Stylus Pro 9600, Stylus Pro 9700, Stylus Pro 9880, Stylus Pro 9890, Stylus Pro 9900	Harmonized System (HS) code	84439990
Operational conditions		Pallet width (UK)	100 cm
Operating relative humidity (H-H)	40 - 60%	Pallet length (UK)	120 cm
Operating temperature (T-T)	15 - 30 °C	Pallet height (UK)	74.4 cm
Storage temperature (T-T)	0 - 40 °C	Pallet gross width	80 cm
Storage relative humidity (H-H)	10 - 80%	Pallet gross length	120 cm
		Pallet gross height	74.4 cm
		Products per pallet (UK)	48 pc(s)
		Products per pallet layer	7 pc(s)
		Products per pallet layer (UK)	8 pc(s)
		Minimum order quantity	2 pc(s)

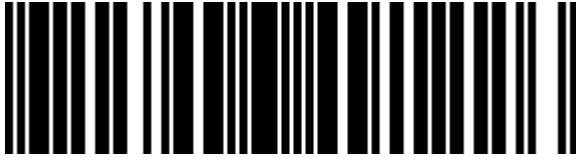

8715946491226

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 22-DEC-2024. Prints or copies of Information are only valid on the printed Publication date