

## Philips Signage Solutions 32BDL4511D/00 Signage Display Digital A-board 81.3 cm (32") ADS 400 cd/m<sup>2</sup> Full HD Black 24/7

**Brand :** Philips


**Product family:** Signage Solutions

**Product code:** 32BDL4511D/00

**Product name :**  
32BDL4511D/00

Philips Signage Solutions 32BDL4511D/00. Product design: Digital A-board. Display diagonal: 81.3 cm (32"), Display technology: ADS, Display resolution: 1920 x 1080 pixels, Display brightness: 400 cd/m<sup>2</sup>, HD type: Full HD. Operating hours (hours/days): 24/7. Product colour: Black

| Display                       |                       | Design                                  |   |
|-------------------------------|-----------------------|---|---|
| Panel type                    | ADS                   | Orientation                             | Horizontal/Vertical   |
| Display diagonal *            | 81.3 cm (32")         | Product colour *                        | Black   |
| Display technology *          | ADS                   | VESA mounting *                         | ✓   |
| Display resolution *          | 1920 x 1080 pixels    | Panel mounting interface                | 100 x 100,200 x 200 mm  |
| Display brightness *          | 400 cd/m <sup>2</sup> | <b>Performance</b>                      |   |
| HD type *                     | Full HD               | Purpose *                               | Commercial  |
| Response time                 | 8 ms                  | Operating hours (hours/days)            | 24/7  |
| Contrast ratio (typical)      | 1200:1                | <b>Power</b>                            |   |
| Contrast ratio (dynamic)      | 500000:1              | Power consumption (typical) *           | 36 W  |
| Viewing angle, horizontal     | 178°                  | Power consumption (standby) *           | 0.5 W   |
| Viewing angle, vertical       | 178°                  | Energy efficiency class (SDR)           | G   |
| Display number of colours     | 16.7 million colours  | Energy consumption (SDR) per 1000 hours | 36 kWh  |
| Pixel pitch                   | 0.36375 x 0.36375 mm  | AC input voltage                        | 100/240 V   |
| Panel life                    | 50000 h               | AC input frequency                      | 50 - 60 Hz  |
| Native refresh rate           | 60 Hz                 | Energy efficiency scale                 | A to G  |
| Haze rate                     | 25%                   | <b>Computer system</b>                  |   |
| <b>Ports &amp; interfaces</b> |                       | Video formats supported                 | H.263, H.264, H.265, MPEG   |
| HDMI ports quantity *         | 3                     | Audio formats supported                 | AAC, HE-AAC   |
| HDMI version                  | 2.0                   | Image formats supported                 | BMP, JPG, PNG   |
| HDMI input ports quantity     | 2                     | <b>Weight &amp; dimensions</b>          |   |
| HDMI output ports quantity    | 1                     | Display width                           | 726.5 mm  |
| DVI port *                    | ✓                     | Display depth                           | 65.1 mm   |
| DVI-I ports quantity          | 1                     | Display height                          | 425.4 mm  |
| DisplayPorts quantity *       | 2                     | Display weight                          | 5.7 kg  |
| DisplayPorts in               | 1                     | <b>Packaging content</b>                |   |
| DisplayPorts out              | 1                     | Remote control included                 | ✓   |
| USB port *                    | ✓                     | Batteries included                      | ✓   |
| USB ports quantity            | 2                     | Cables included                         | AC, DisplayPort, IR sensor, RS-232  |
| USB version                   | 2.0                   | <b>Operational conditions</b>           |   |
| Ethernet LAN *                | ✓                     | Operating temperature (T-T)             | 0 - 40 °C   |
| Ethernet LAN (RJ-45) ports    | 1                     | Operating relative humidity (H-H)       | 20 - 80%  |
| RS-232C                       | ✓                     | Storage temperature (T-T)               | -20 - 60 °C   |
| Remote (IR) input             | 1                     | Storage relative humidity (H-H)         | 5 - 95%   |
| Remote (IR) output            | 1                     | <b>Certificates</b>                     |   |
| <b>Audio</b>                  |                       | Certification                           | CE FCC Class A CCC Restriction of Hazardous Substances (ROHS) CB BSMI EMF VCCI PSB ETL CECP EAC |
| Built-in speaker(s) *         | ✓                     |   |   |
| Number of built-in speakers   | 2                     |   |   |
| RMS rated power               | 20 W                  |   |   |
| <b>Design</b>                 |                       |   |   |
| Product design *              | Digital A-board       |   |   |
| Placement supported *         | Indoor                |   |   |

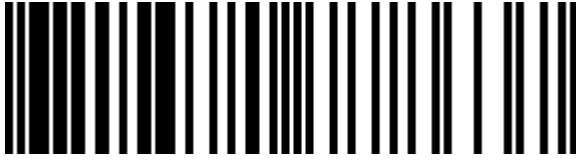

8712581778637

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 26-DEC-2024. Prints or copies of Information are only valid on the printed Publication date