PHILIPS

Philips 43BDL4511D/00 Signage Display Digital A-board 109.2 cm (43") 500 cd/m² 4K Ultra HD Black 24/7
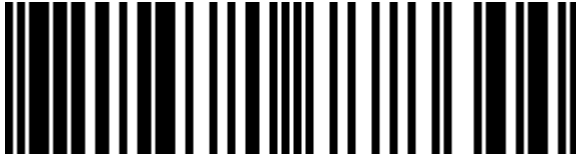
Brand : Philips

Product name : 43BDL4511D/00

Product code: 43BDL4511D/00

Philips 43BDL4511D/00. Product design: Digital A-board. Display diagonal: 109.2 cm (43"), Display resolution: 3840 x 2160 pixels, Display brightness: 500 cd/m², HD type: 4K Ultra HD. Operating hours (hours/days): 24/7. Product colour: Black

Display

Display diagonal *	109.2 cm (43")
Display resolution *	3840 x 2160 pixels
Display brightness *	500 cd/m²
HD type *	4K Ultra HD
Native aspect ratio	16:9
Response time	8 ms
Contrast ratio (typical)	1200:1
Contrast ratio (dynamic)	500000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	1.07 billion colours
Pixel pitch	0.2451 x 0.2451 mm
Display diagonal (metric)	108 cm
Panel life	50000 h

Ports & interfaces

HDMI ports quantity *	3
HDMI version	2.0
DVI port *	✔
DVI-I ports quantity	1
DisplayPorts quantity *	2
DisplayPorts in	1
DisplayPorts out	1
USB port *	✔
USB ports quantity	2
USB version	2.0
Ethernet LAN *	✔
Ethernet LAN (RJ-45) ports	1
Audio (L/R) in	1
Audio (L/R) out	1
RS-232C	✔
Remote (IR) input	1
Remote (IR) output	1
OPS module slot	✔

Audio

Built-in speaker(s) *	✔
Number of built-in speakers	2
RMS rated power	10 W

Design

Product design *	Digital A-board
Placement supported *	Indoor
Product colour *	Black
VESA mounting *	✔
Panel mounting interface	200 x 200 mm

Performance

Purpose *	Commercial
On Screen Display (OSD)	✔
On Screen Display (OSD) languages	Arabic
Operating hours (hours/days)	24/7

Power

Power consumption (typical) *	62 W
Power consumption (standby) *	0.5 W
Power consumption (max)	170 W
Energy efficiency class (SDR)	G
Energy consumption (SDR) per 1000 hours	71 kWh
AC input voltage	100/240 V
AC input frequency	50 - 60 Hz
Energy efficiency scale	A to G

Computer system

Video formats supported	H.263, H.264, H.265, MPEG
Audio formats supported	AAC, HE-AAC
Image formats supported	BMP, JPEG, PNG

Weight & dimensions

Display width	973 mm
Display depth	63.5 mm
Display height	561.2 mm
Display weight	10.7 kg
Base width	56.1 cm

Packaging content

Remote control included	✔
Batteries included	✔
Cables included	AC, IR sensor, RS-232

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	20 - 80%
Storage temperature (T-T)	-20 - 60 °C
Storage relative humidity (H-H)	5 - 95%

Certificates

Certification	CE FCC Class A CCC Restriction of Hazardous Substances (ROHS) CB BSMI EMF VCCI PSB ETL CECP EAC Energy Star 8.0

Other features

Maximum refresh rate	60 Hz

8712581778644