



Canon imagePROGRAF PRO-300 valokuvatulostin 4800 x 2400 DPI 13" x 19" (33x48 cm) Wi-Fi

Tuotemerkki : Canon

Tuoteperhe: imagePROGRAF

Tuotekoodi: 4278C009

Tuotteen nimi : PRO-300

Canon imagePROGRAF PRO-300. Suurin resoluutio: 4800 x 2400 DPI. Suurin tulostusalue: 13" x 19" (33x48 cm). Reunaton tulostus. Wi-Fi. Suoratulostus. Tuotteen väri: musta



Printing		Network	
Borderless printing *	✓	Mobile printing technologies	Apple AirPrint, Google Cloud Print, Mopria Print Service, PIXMA Cloud Link
Maximum resolution *	4800 x 2400 DPI		
Features		Performance	
Market positioning *	Professional	Sound power level (printing)	41.1 dB
Product colour *	Black	Power	
Number of print cartridges	10	Power source *	AC
Printing colours	Cyan, Grey, Magenta, Matte black, Photo black, Photo cyan, Photo magenta, Red, Yellow	Power consumption (printing) *	16 W
Built-in display	✓	Power consumption (standby)	2.4 W
Display	LCD	Power consumption (off)	0.2 W
Display diagonal	7.62 cm (3")	AC input voltage	100 - 240 V
Control type	Buttons	AC input frequency	50 - 60 Hz
Certification	RoHS, WEEE	System requirements	
Input & output capacity		Windows operating systems supported	Windows 10, Windows 7, Windows 8.1
Maximum input capacity	100 sheets	Mac operating systems supported	Mac OS X 10.11 El Capitan, Mac OS X 10.12 Sierra, Mac OS X 10.15 Catalina
Paper handling		Other operating systems supported	Android
Maximum print size *	13" x 19" (33x48 cm)	Operational conditions	
Paper tray media types	Art paper, Matte paper, Photo paper, Semi-glossy paper	Operating temperature (T-T)	5 - 35 °C
Maximum ISO A-series paper size	A3+	Storage temperature (T-T)	10 - 90 °C
ISO A-series sizes (A0...A9)	A3, A3+, A4, A5	Operating relative humidity (H-H)	0 - 40%
ISO B-series sizes (B0...B9)	B4, B5	Storage relative humidity (H-H)	5 - 95%
Non-ISO print media sizes	2L	Sustainability	
Printing sizes	10 x 15 cm	Sustainability certificates	ENERGY STAR
Borderless printing media sizes	A3+	Weight & dimensions	
Photo paper sizes (imperial)	3.5x3.5,12x12,7x10	Width	639 mm
Ports & interfaces		Depth	379 mm
Direct printing *	✓	Height	200 mm
PictBridge *	✓	Weight	14.4 kg
USB port *	✓	Packaging data	
Optional connectivity	Ethernet, Wireless LAN	AC adapter included	✓
Network			
Wi-Fi *	✓		


Network

Ethernet LAN *

**Logistics data**

Harmonized System (HS) code

84433210

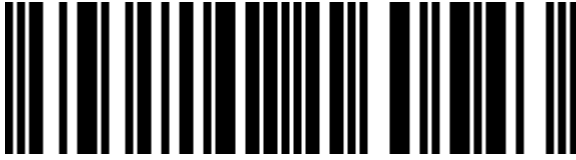

4549292160543

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 22-DEC-2024. Prints or copies of Information are only valid on the printed Publication date