

Lexmark MS810de 1200 x 1200 DPI A4

Brand : Lexmark

Product code: 40G0161


Product name : MS810de

MS810de, 1200 x 1200 Dpi, 52 ppm, Duplex, 800 MHz, 512 MB, USB 2.0, Gigabit Ethernet, 23.71 kg
 Lexmark MS810de. Print technology: Laser. Number of print cartridges: 1, Maximum duty cycle: 250000 pages per month. Maximum resolution: 1200 x 1200 DPI. Maximum ISO A-series paper size: A4. Print speed (black, normal quality, A4/US Letter): 52 ppm, Duplex printing. Network ready. Product colour: Black, Grey



Printing		Network	
Colour *	✗	Supported network protocols (IPv4)	TCP/IP IPv4, AppleTalk
Print technology *	Laser	Supported network protocols (IPv6)	TCP/IP IPv6, TCP, UDP
Duplex printing *	✓	Management protocols	HTTP, HTTPS (SSL*/TLS), SNMPv1, SNMPv2c, SNMPv3, WINS, IGMP, BOOTP, RARP, APIPA (AutoIP), DHCP, ICMP, DNS, Bonjour, DDNS, mDNS, ARP, NTP, Telnet, Finger
Maximum resolution *	1200 x 1200 DPI		
Print speed (black, normal quality, A4/US Letter) *	52 ppm		
Duplex print speed (black, normal quality, A4/US Letter)	32 ppm		
Time to first page (black, normal)	4.8 s		
Features		Performance	
Maximum duty cycle *	250000 pages per month	Internal memory *	512 MB
Recommended duty cycle	3000 - 20000 pages per month	Maximum internal memory	2560 MB
Printing colours *	Black	Processor frequency	800 MHz
Number of print cartridges *	1	Sound pressure level (printing)	57 dB
Page description languages *	Microsoft XPS, PCL 5e, PCL 6, PDF 1.7, PostScript 3, PPDS	Sound pressure level (duplex printing)	56 dB
Country of origin	China	Sound power level (standby)	32 dB
Input & output capacity		Design	
Total number of input trays *	2	Product colour *	Black, Grey
Total input capacity *	650 sheets		
Total output capacity *	550 sheets		
Maximum number of input trays	6		
Maximum input capacity	4400 sheets		
Maximum output capacity	2550 sheets		
Paper handling			
Maximum ISO A-series paper size *	A4		
Maximum print size	216 x 356 mm		
Paper tray media types *	Card stock, Envelopes, Labels, Plain paper, Transparencies		
ISO A-series sizes (A0...A9) *	A4, A5, A6		
Non-ISO print media sizes	Executive, Folio, Letter, Oficio, Statement, Legal		
JIS B-series sizes (B0...B9)	B5		

Paper handling		System requirements	
Envelopes sizes	7 3/4, 9, 10, B5, C5, DL		Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 8, Windows 8 Enterprise, Windows 8 Enterprise x64, Windows 8 Pro, Windows 8 Pro x64, Windows 8 x64, Windows Vista Business, Windows Vista Business x64, Windows Vista Enterprise, Windows Vista Enterprise x64, Windows Vista Home Basic, Windows Vista Home Basic x64, Windows Vista Home Premium, Windows Vista Home Premium x64, Windows Vista Ultimate, Windows Vista Ultimate x64, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64
Paper tray media weight	60 - 176 g/m ²		Mac OS X 10.5 Leopard, Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS X 10.8 Mountain Lion
Paper tray media weight (imperial)	7.26 - 21.3 kg (16 - 47 lbs)		Fedora 14, Fedora 15, RedHat EL Linux 4.0 U5, RedHat EL Linux 4.0 U6, RedHat EL Linux 4.0 U7, RedHat EL Linux 5.0, RedHat EL Linux 5.1, RedHat EL Linux 5.2, RedHat EL Linux 5.3, SuSE Linux 10, SuSE Linux 10.2, SuSE Linux 10.3, SuSE Linux 11
Ports & interfaces			Windows operating systems supported
Standard interfaces	Ethernet, USB 2.0		Mac operating systems supported
Direct printing *	✓		Linux operating systems supported
USB 2.0 ports quantity	3		Server operating systems supported
Optional connectivity	Parallel, Serial (RS-232), Wireless LAN		Other operating systems supported
Network			
Network ready	✓		
Wi-Fi *	✗		
Ethernet LAN *	✓		
Security algorithms	802.1x RADIUS, LEAP, MD5, PEAP		
Operational conditions			
Operating temperature (T-T)	16 - 32 °C		
Operating relative humidity (H-H)	8 - 80%		
Operating altitude	0 - 2896 m		
Operating temperature (T-T)	60 - 90 °F		
Sustainability			
Sustainability certificates	ENERGY STAR		
Weight & dimensions			
Weight	23.7 kg		
Dimensions (WxDxH)	425 x 510 x 419 mm		
Packaging data			
Package weight	27.5 kg		
Other features			
Mac compatibility	✓		
Networking features	Gigabit Ethernet		
Power LED	✓		
Stand-by LED	✓		
Finishing option	✓		
Package dimensions (WxDxH)	615 x 537 x 563 mm		

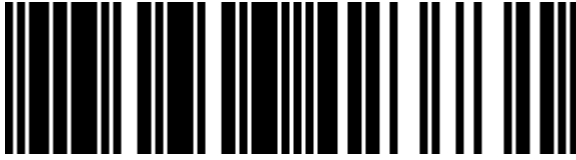

0734646423731



734646423731

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 15-NOV-2024. Prints or copies of Information are only valid on the printed Publication date