

ASUS ProArt Display PA32UCXR computer monitor 81.3 cm (32") 3840 x 2160 pixels 4K Ultra HD LCD Black

Brand : ASUS

Product family: ProArt

Product code: 90LM03H0-B01K70

Product name : ProArt Display PA32UCXR



ProArt Display PA32UCXR Professional Monitor - 32-inch, 4K UHD (3840 x 2160), 2,304 zones Mini LED Backlight, Built-in Motorized Colorimeter, Self / Auto Calibration, HDR-10, HLG, Dolby Vision, 99% Adobe RGB, 97% DCI-P3, $\Delta E < 1$, Thunderbolt 4 PD 90W, VESA DisplayHDR 1400, Hardware Calibration, Calman Ready, ColourSpace Integration, Ergonomic Stand, Green Sustainability

[ASUS ProArt Display PA32UCXR computer monitor 81.3 cm \(32"\) 3840 x 2160 pixels 4K Ultra HD LCD Black:](#)

ProArt Display PA32UCXR

1600 Nits Mini-LED Monitor with Built-in Colorimeter for Ultimate Realism


ASUS ProArt Display PA32UCXR features mini-LED backlighting with 2304-zone local dimming, 1600 nits peak brightness, and up to 1000 nits sustained brightness without partial patch limitation. It boasts an industry-leading $\Delta E < 1$ color difference, and features a built-in motorized flip colorimeter to ensure professional-grade color accuracy. Two Thunderbolt™ 4 ports and a host of other connectivity options enable seamless and efficient creative workflows, making this monitor ideal for content creators.

Display		Ports & interfaces	
Display diagonal *	81.3 cm (32")	DisplayPorts quantity	1
Display resolution *	3840 x 2160 pixels	DisplayPort version	1.4
HD type *	4K Ultra HD	Thunderbolt 4 ports quantity	2
Native aspect ratio *	16:9	Headphone out *	✓
Display technology *	LCD	Headphone outputs	1
Panel type *	IPS	HDCP	✓
Backlight type	Mini LED	HDCP version	2.2
Touchscreen *	✗	Ergonomics	
Display brightness (peak)	1600 cd/m ²	VESA mounting *	✓
Display brightness (typical)	1000 cd/m ²	Panel mounting interface	100 x 100 mm
Response time *	5 ms	Wall mountable	✓
Anti-glare screen	✓	Cable lock slot *	✓
Screen shape *	Flat	Cable lock slot type	Kensington
Contrast ratio (typical) *	1000:1	Height adjustment *	✓
Contrast ratio (dynamic)	1000000:1	Height adjustment	10 cm
Maximum refresh rate *	60 Hz	Pivot	✓
Viewing angle, horizontal	178°	Pivot angle	-90 - 90°
Viewing angle, vertical	178°	Swivelling	✓
Display number of colours *	1.073 billion colours	Swivel angle range	-30 - 30°
Pixel pitch	0.1845 x 0.1845 mm	Tilt adjustment	✓
Viewable size, horizontal	70.8 cm	Tilt angle range	-5 - 23°
Viewable size, vertical	39.9 cm	Power	
Digital horizontal frequency	135 - 135 kHz	Energy efficiency class (SDR) *	G
Digital vertical frequency	40 - 60 Hz	Energy efficiency class (HDR) *	G
High Dynamic Range (HDR) supported	✓	Energy consumption (SDR) per 1000 hours *	41 kWh
High Dynamic Range (HDR) technology	DisplayHDR 1400, Dolby Vision, High Dynamic Range 10 (HDR10), Hybrid Log-Gamma (HLG)		
Colour gamut standard	DCI-P3		

Display		Power	
Colour gamut	97%	Energy consumption (HDR) per 1000 hours *	63 kWh
sRGB coverage (typical)	100%	Power consumption (typical) *	46.62 W
Performance		Power consumption (off)	0 W
VESA Adaptive Sync support	✓	Power consumption (PowerSave)	0.5 W
Flicker-free technology	✓	AC input voltage	100 - 240 V
Low Blue Light technology	✓	AC input frequency	50/60 Hz
Multimedia		Energy efficiency scale	A to G
Number of speakers	2	European Product Registry for Energy Labelling (EPREL) code	1692522
RMS rated power	6 W	Weight & dimensions	
Built-in speaker(s) *	✓	Width (with stand)	727 mm
Built-in camera *	✗	Depth (with stand)	245 mm
Design		Height (with stand)	601 mm
Product colour *	Black	Weight (with stand)	13.8 kg
Feet colour	Black	Width (without stand)	727 mm
Ports & interfaces		Depth (without stand)	90 mm
Built-in USB hub *	✓	Height (without stand)	445 mm
USB hub version	3.2 Gen 2 (3.1 Gen 2)	Weight (without stand)	9.2 kg
USB Type-A downstream ports quantity	3	Packaging data	
USB Type-C downstream ports quantity	1	Package width	965 mm
USB Power Delivery (USB PD)	✓	Package depth	228 mm
USB Power Delivery up to	90 W	Package height	555 mm
HDMI *	✓	Package weight	20.5 kg
HDMI ports quantity	2	Package type	Box
HDMI version	2.0	Other features	
		Hardware calibration	✓



4711387267103

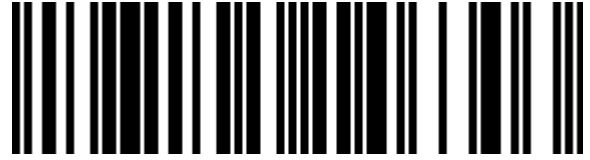

0197105146303



197105146303

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.