



Lindy 15m USB 3.0 Active Extension Pro

Brand : Lindy

Product code: 43229

Product name : 15m USB 3.0 Active Extension Pro


- High performance, active cable that provides an extended 15m connection between a computer and USB 3.0 device
- Can be used standalone or as part of the Lindy Active Extension System Pro to create bespoke extension systems of over 40m (depending on the cable configurations used)
- Supports the full USB 3.0 SuperSpeed bandwidth for speeds of 5Gbps
- Easy to use □ connects to the deviceandsquo;s existing USB cable (2m maximum)
- 2 year warranty

15m USB 3.0 Active Extension Pro

Lindy 15m USB 3.0 Active Extension Pro. Cable length: 15 m. Connector 1: USB A, Connector 2: USB A, USB version: USB 3.2 Gen 1 (3.1 Gen 1), Maximum data transfer rate: 5 Gbit/s, Connector contacts plating: Gold, Product colour: Black



Features		Features	
USB version *	USB 3.2 Gen 1 (3.1 Gen 1)	Certification	CE, UKCA, FCC, RoHS, REACH, California Proposition 65
Connector 1 *	USB A	Power	
Connector 2 *	USB A	Power note	2.5/0.7mm DC Connector
Connector 1 gender *	Male	Weight & dimensions	
Connector 2 gender *	Female	Cable length *	15 m
Connector 1 form factor	Straight	Cable diameter	7 mm
Connector 2 form factor	Straight	Weight	1 kg
AWG wire size	24/24/20	Bend radius (min)	3.6 cm
Connector material	Nickel	Connector 1 dimensions (WxDxH)	15 x 49 x 8 mm
Contact material	Brass	Connector 2 dimensions (WxDxH)	20 x 80 x 13 mm
Connector contacts plating	Gold	Packaging data	
Cable jacket material	Polyvinyl chloride (PVC)	Package type	Box
Conductor material	Tinned copper	Package width	280 mm
Connector housing material	Plastic	Package depth	180 mm
Maximum data transfer rate	5000 Mbit/s	Package height	10 mm
Maximum data transfer rate	5 Gbit/s	Package weight	1.35 kg
Product colour *	Black	Packaging content	
Cable type	Round cable	Quantity per pack *	1 pc(s)
Transmission medium	Twisted pair	Operational conditions	
	0.064MHz - 0.08dB .256MHz - 0.11dB	Operating temperature (T-T)	0 - 50 °C
	0.512MHz - 0.13dB	Storage temperature (T-T)	-20 - 60 °C
	0.772MHz - 0.15dB 1.0MHz - 0.20dB	Logistics data	
	4MHz - 0.39dB 8MHz - 0.57dB	Harmonized System (HS) code	84733080
	12MHz - 0.67dB 24MHz - 0.95dB		
	48MHz - 1.35dB 96MHz - 1.90dB		
	200MHz - 3.20dB 400MHz - 5.80dB		

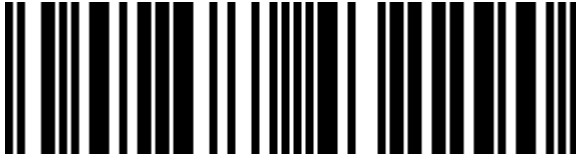

4002888432290

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 15-NOV-2024. Prints or copies of Information are only valid on the printed Publication date