


ASUS PRIME B650-PLUS-CSM AMD B650 Pistoke AM5 ATX

Tuotemerkki : ASUS

Tuotekoodi: 90MB1BS0-M0EAYC


Tuotteen nimi : PRIME B650-PLUS-CSM

ASUS PRIME B650-PLUS-CSM. Suoritinvalmistaja: AMD, Prosessorin kanta: Pistoke AM5, Yhteensopivat prosessorit: AMD Ryzen 7000 Series. Tuetut muistityypit: DDR5-SDRAM, Sisäinen enimmäismuisti: 128 GB, Muistipaikkojen tyyppi: DIMM. Tuetut tallennusasemaliitännät: M.2, SATA III, Tuetut tallennusasematyyppit: HDD & SSD, RAID-tasot: 0, 1, 10. Ethernet-liitännän tyyppi: 2.5 Gigabit Ethernet. Komponentti (tuotteelle): PC, Emolevyn muototekijä: ATX, Emolevyn piirisarjan perhe: AMD



Processor		Rear panel I/O ports	
Processor manufacturer *	AMD	USB 3.2 Gen 2 (3.1 Gen 2) Type-A ports quantity *	3
Processor socket *	Socket AM5	USB 3.2 Gen 2 (3.1 Gen 2) Type-C ports quantity *	1
Compatible processor series *	AMD Ryzen 7000 Series	Ethernet LAN (RJ-45) ports *	1
Memory		HDMI ports quantity *	1
Supported memory types *	DDR5-SDRAM	HDMI version	2.1
Number of memory slots *	4	DisplayPorts quantity	1
Memory slots type	DIMM	DisplayPort version	1.4
Memory channels	Dual-channel	Line-in	✓
ECC compatibility	ECC & Non-ECC	Microphone in	✓
Supported memory clock speeds	4800,5000,5200,5400,5600,5800,6000,6200,6400 MHz	S/PDIF out port	✓
Maximum internal memory *	128 GB	Network	
Unbuffered memory	✓	Ethernet LAN	✓
Storage controllers		Ethernet interface type	2.5 Gigabit Ethernet
Supported storage drive types	HDD & SSD	Wi-Fi *	✗
Supported storage drive interfaces *	M.2, SATA III	Features	
Number of HDDs supported	4	Motherboard chipset *	AMD B650
RAID support	✓	Audio output channels *	7.1 channels
RAID levels	0, 1, 10	Component for *	PC
Graphics		Motherboard form factor *	ATX
Parallel processing technology support *	Not supported	Motherboard chipset family *	AMD
Internal I/O		Windows operating systems supported	Windows 10, Windows 11
USB 2.0 connectors *	2	Expansion slots	
USB 3.2 Gen 1 (3.1 Gen 1) connectors *	2	PCI Express x1 (Gen 4.x) slots	2
Number of SATA III connectors *	4	PCI Express x16 (Gen 4.x) slots	2
Front panel audio connector	✓	Number of M.2 (M) slots	2
ATX Power connector (24-pin)	✓		

Internal I/O		BIOS	
CPU fan connector	✓	BIOS type *	UEFI AMI
Number of chassis fan connectors	3	BIOS memory size	256 Mbit
EPS power connector (8-pin)	✓	Packaging data	
Number of COM connectors	1	Package width	373 mm
TPM connector	✓	Package depth	68 mm
Thunderbolt headers	1	Package height	338 mm
12V power connector	✓	Package weight	1.35 kg
RGB LED pin header	✓	Weight & dimensions	
Rear panel I/O ports		Width	305 mm
USB 2.0 ports quantity *	2	Depth	244 mm
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity *	2	Packaging content	
		Cables included	SATA
		User guide	✓
		Other features	
		Back-to-BIOS button	✓
		Number of M.2 (E) slots	1

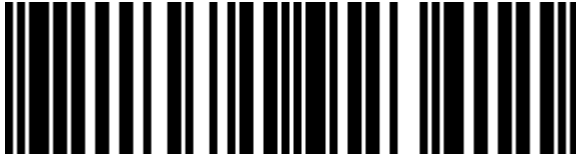

4711081923411

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 22-DEC-2024. Prints or copies of Information are only valid on the printed Publication date