

GCS1902-KM

2-Port 4K UHD DisplayPort KVMP with Keyboard and Mouse



- Affordable DisplayPort KVMP Option
- Kit Includes:
- 2-Port 4K UHD KVMP (GCS1902)
- Wireless Keyboard and Mouse(<u>GKM558R</u>)
- KVM and audio cables included

DisplayPort KVMP Switch with Wireless Keyboard and Mouse


IOGEAR's 2-Port 4K UHD DisplayPort KVMP bundle comes complete with a set of IOGEAR's state-of-the-art wireless keyboard and mouse. Streamline your 4K setup with this computer switch, IOGEAR's low-profile keyboard and touch sensor mouse. With a combination of 4K UHD resolution support, the next generation USB3.0 hub, and enhanced user-friendly operation, IOGEAR's DisplayPort KVMP Bundle provides the latest innovations in DisplayPort KVM technology and convenience in desktop setup. Your most affordable computer switching connectivity solution is ready for setup straight out-of-the-box!

• DisplayPort KVMP:

- · Switch between 2 computers at the push of a button
- Control 2 computers using a single keyboard, mouse, and DisplayPort video console
- Superior video quality 4K UHD (3840x2160 @30Hz)
- DisplayPort 1.1 and HDCP compliant
- 2-Port USB 3.0 Hub with SuperSpeed 5Gbps transfer rate
- DP++ supports HDMI and DVI output¹
- Switch between computers via front panel pushbuttons, hotkeys
- Independent switching of the video, USB, and audio
- Supports superior HD quality audio²
- Multi-platform support Windows®7, Windows®8.1, Windows®10, Mac®, and Linux®
- Auto Scan Mode to monitor all computers
- Power On Detection and hot pluggable

- Firmware Upgradable
- · Supports keyboard and mouse emulation
- •
- Wireless Keyboard and Mouse:2.4 GHz wireless- up to 33ft range
- 1000dpi resolution wireless mouse with touch pad
- Low-profile keys for quiet, comfortable typing
- Touch Mouse supports smooth horizontal and vertical animation scrolling
- 12 multimedia hotkeys for quick access to your music, e-mail, browser and more
- Chiclet style keyboard layout
- · Durable keys with a durability of 10 million cycles

¹Dual-Mode DisplayPort (DP++) requires active HDMI or DVI adapter for most single display setups.












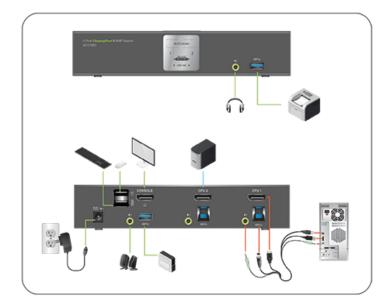

Requirements

Package Contents

- Console
- DisplayPort compatible monitor
- Computer •
- DisplayPort port USB Type-A port
- •
- Wireless Keyboard and Mouse
- Windows® 7, Windows® 8, Windows® 8.1, Windows® 10
- Mac OS X 10.3+*

*Some function keys may not work with older Mac OS Systems **Use with video adapter may change performance

- 1 x 2-Port 4K UHD DisplayPort 1.1
- KVMP • 1 x Wireless
- Keyboard
 - 1 x Wireless Touch Sensor Mouse
 - 1 x USB RF Receiver • 2 x DisplayPort
 - Cables
 - 2 x USB 3.0 Cables
 - 2 x Audio Cables
 - 1 x Power Adapter
 - 1 x Manual

Function	GCS1902-KM	Dimensions	GCS1902-KM
Computer Connections		Master Carton	
Direct	2	Width	9" (22.86cm)
Port Selection	Pushbutton & Hotkeys	Height	10" (25.4cm)
Console Connectors		Depth	22" (55.88cm)
Monitor	1 x DisplayPort	Master Carton Qty.	1
Keyboard	1 x USB Type A	Weight	
Mouse	1 x USB Type A	Master Carton Wt.	5.88lb (2.77kg)
Audio	3.5mm Mini Stereo Jack (Front and Rear)		
CPU Connectors			
Monitor	2 x DisplayPort		
Keyboard & Mouse	2 x USB 3.0 Type B		
Audio	2 x 3.5mm Mini Stereo Jack		
Switches			
F/W Upgrade	1 x USB Type B		
Port Selection	2 x Pushbuttons		
Connectors			
USB	2 x USB 3.0 Type A		
LEDs			
Mode	2 x Orange		
KVM	2 x Orange		
Audio	2 x Orange		
USB Peripherals	2 x Green		

www.iogear.com

at Home at Work on-the-Go



Mouse	USB	
Video Resolution	3840 x 2160 @ 30Hz (4K UHD)	
Scan Interval	1~99 seconds (5 seconds default)	
Power		
Voltage	DC 5.3V	
Environment		
Operation Temperature	0~50C	
Storage Temperature	-20~60C	
Humidity	0~80% RH, Non-condensing	
Housing		
Case	KVM: Metal; Keyboard & Mouse: Plastic	
Operating System Support	Keyboard: Windows Vista®, Windows® 7, Windows® 8, Windows® 8.1, Mac OS X 10.3+	
Interface	Keyboard & Mouse: USB 2.0 and USB 1.1	
Resolution	Mouse: 1000dpi	
Radio Frequency	Keyboard & Mouse: 2.4GHz	
Battery Type	Keyboard: 1 x AAA, Mouse: 1 x AA	
Operating Range	Keyboard & Mouse: Up to 33ft (10m)	