


Delock PCI Express Card > 1 x Serial

Description

The Delock PCI Express card expands a PC by one external serial port. Different devices such as scanner, printer, mouse etc. can be connected to this card. By using the included low profile bracket, the PCI Express card can be also installed into a Mini-PC.

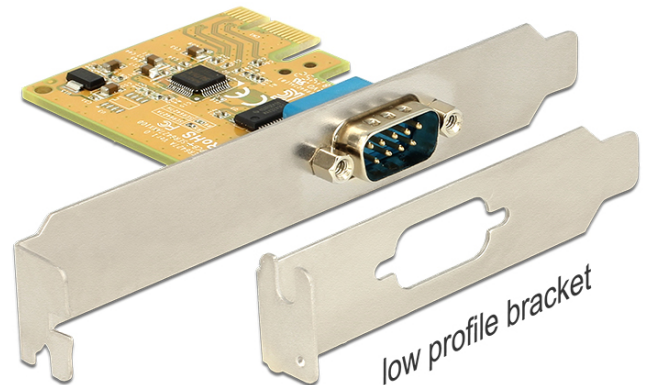

Specification

- Connector:
external: 1 x serial RS-232 DB9 male
internal: 1 x PCI Express x1, V2.0
- Chipset: SUN2212
- Data transfer rate up to 115.2 Kb/s
- FIFO: 128 byte
- Compatible with 16C950 UART
- Signals: DCD, TxD, RxD, RTS, CTS, DTR, DSR, GND, RI
- ±15 kV ESD protection for all serial signals meets IEC1000-4-2 standard

System requirements

- Windows 7/7-64/8/8-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express slot

Package content

- PCI Express card
- Low profile bracket
- Driver CD
- User manual

Item No. 89444



EAN: 4043619894444

Country of origin: China

Package: Retail Box



Images



General

Supported operating system:	Windows 7 32-bit
	Windows 7 64-bit
	Windows 8 32-bit
	Windows 8 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows 10 32-bit
	Windows 10 64-bit

Interface

External:	1 x serial RS-232 DB9 male
Internal:	1 x PCI Express x1, V2.0

Technical characteristics

Chipset:	SUN2212
Data transfer rate:	115.2 Kb/s
FIFO:	128 byte
UART:	16C950

Physical characteristics

Slot bracket:	low profile
	standard