



APC Smart-UPS SUA5000RMI5U - 5000VA, 8x C13, 2x C19 outlet, NMC, Rackmount/Tower

Brand : APC

Product code: SUA5000RMI5U

Product name : APC Smart-UPS SUA5000RMI5U - 5000VA, 8x C13, 2x C19 outlet, NMC, Rackmount/Tower




APC Smart-UPS SUA5000RMI5U - 5000VA, 8x C13, 2x C19 outlet, NMC, Rackmount/Tower
APC Smart-UPS SUA5000RMI5U - 5000VA, 8x C13, 2x C19 outlet, NMC, Rackmount/Tower. UPS topology: Line-Interactive, Output power capacity: 5 kVA, Output power: 4000 W. AC outlet types: C13 coupler, C19 coupler, Power plug: Hard Wire 3-wire, AC outlets quantity: 10 AC outlet(s). Battery technology: Sealed Lead Acid (VRLA), Battery capacity: 1632 VAh, Typical backup time at full load: 9.4 min. Form factor: Rackmount/Tower, Product colour: Black, Rack capacity: 5U. Compliance certificates: RoHS, Certification: C-tick, CE, EN 50091-1, EN 50091-2, GOST, GS Mark, VDE, REACH, PEP, EOL



Features		Design	
UPS topology *	Line-Interactive	Form factor *	Rackmount/Tower
Output power capacity *	5 kVA	Rack capacity	5U
Output power *	4000 W	Product colour *	Black
Waveform *	Sine	LED indicators	Battery replacement
Input operation voltage (min) *	151 V	Operational conditions	
Input operation voltage (max) *	302 V	Operating temperature (T-T)	0 - 40 °C
Input frequency *	50/60 Hz	Storage temperature (T-T)	-15 - 45 °C
Output operation voltage (min)	220 V	Operating relative humidity (H-H)	0 - 95%
Output operation voltage (max)	240 V	Storage relative humidity (H-H)	0 - 95%
Output frequency regulation	47 - 53 Hz	Operating altitude	0 - 9000 m
Automatic Voltage Regulation (AVR)	✓	Non-operating altitude	0 - 15000 m
Surge energy rating	480 J	Certificates	
Hold time (min)	2 ms	Compliance certificates	RoHS
Hold time (max)	4 ms	Certification	C-tick, CE, EN 50091-1, EN 50091-2, GOST, GS Mark, VDE, REACH, PEP, EOL
Number of output phases	1	Packaging content	
Efficiency	96%	Rack mount kit	✓
Noise level	53 dB	Cables included	RS-232
Surge protection	✓	Manual	✓
Audible alarm(s)	✓	Quick installation guide	✓
Auto-restart	✓	Weight & dimensions	
Ports & interfaces		Width	483 mm
AC outlet types	C13 coupler, C19 coupler	Depth	660 mm
Power plug	Hard Wire 3-wire	Height	222 mm
AC outlets quantity	10 AC outlet(s)	Weight	97.7 kg
Number of output IEC jumpers	4		
Battery			
Battery technology	Sealed Lead Acid (VRLA)		

Battery		Packaging data	
Battery capacity	1632 VAh	Software CD	✓
Typical backup time at full load	9.4 min	Package width	610 mm
Typical backup time at half load	26.7 min	Package depth	762 mm
Battery life (max)	5 year(s)	Package height	635 mm
Battery recharge time	3 h	Package weight	106.8 kg
Hot-swap battery	✓	Logistics data	
Automatic battery test	✓	Products per pallet	4 pc(s)
Cold start	✓	Harmonized System (HS) code	85078000
		Total carbon footprint (kg of CO2e)	4487.43
		Products per master (outer) case	1 pc(s)
		Other features	
		Nominal output voltage	230 V
		Nominal input voltage	230 V
		Packaging content	Web/SNMP Management Card

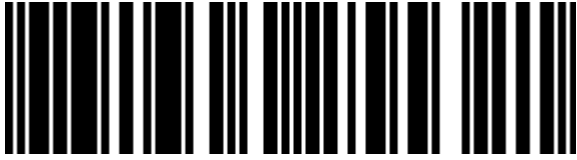

0731304255321



731304255321

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.